

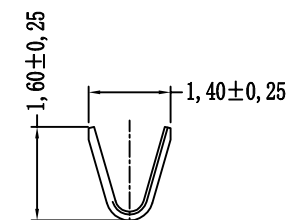
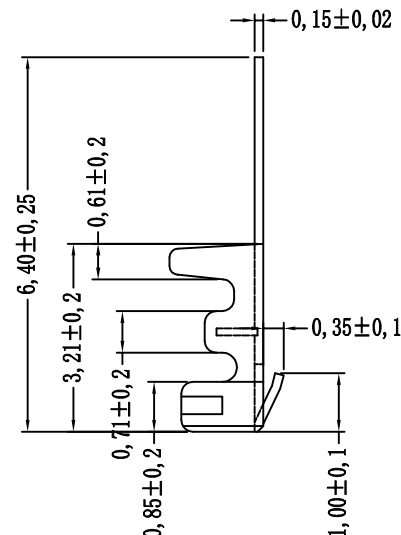



| 修订<br>REV | 标记<br>MARK | 修改摘要<br>REVISION DESCRIPTION | 签名<br>SIGNATURE | 日期<br>DATE |
|-----------|------------|------------------------------|-----------------|------------|
| A0        |            | NEW RELEASE                  | WANG            | 2010-11-07 |
|           |            |                              |                 |            |

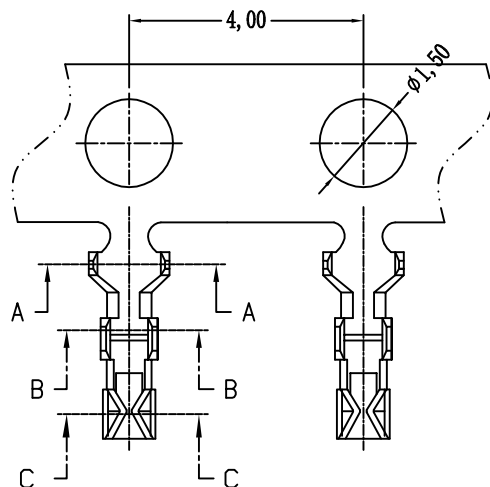

SEC:A-A



SEC:B-B



SEC:C-C

# Ordering information & Specifications

Unit:mm

| Part No     | Wire Range | Insultion O.D. | Material        | Finish           | Qty/reel   |
|-------------|------------|----------------|-----------------|------------------|------------|
| HDGC1251-TP | AWG#28-#32 | 1.00mm(max)    | Phosphor Bronze | Tin over Nickel  | 20,000 PCS |
| HDGC1251-GP | AWG#28-#32 | 1.00mm(max)    | Phosphor Bronze | Gold over Nickel | 20,000 PCS |

Optional Gold plating available but MOQ requested



深圳市华德共创科技有限公司

Shenzhen Huade co-create Technology Co.,LTD

TEL : 0755-27129737

FAX : 0755-29940187

| -TOLERANCES-<br>UNLESS OTHERWISE SPECIFIED<br>公差参数表 |       |        | TITLE: 1.25mm Pitch<br>产品名称: Crimp Terminal |                    |
|-----------------------------------------------------|-------|--------|---------------------------------------------|--------------------|
| X.X                                                 | ±0.30 | X.X°   | ±3°                                         | APPD:<br>核准: XIE   |
| X.XX                                                | ±0.30 | X.XX°  | ±2°                                         | CHECK:<br>校对: WANG |
| X.XXX                                               | ±0.10 | X.XXX° | ±1°                                         | DRAW:<br>绘图: WANG  |
|                                                     |       |        | PART NO:<br>产品编号: HDGC1251-T                | DATE               |
|                                                     |       |        | SCALE                                       | UNIT               |
|                                                     |       |        | CODE NUMBER                                 |                    |




2010-11-07

1:1


mm

A001


| 修订<br>REV | 标记<br>MARK | 修改摘要<br>REVISION DESCRIPTION | 签名<br>SIGNATURE | 日期<br>DATE |
|-----------|------------|------------------------------|-----------------|------------|
| A0        |            | NEW RELEASE                  | WANG            | 2010-11-07 |
|           |            |                              |                 |            |

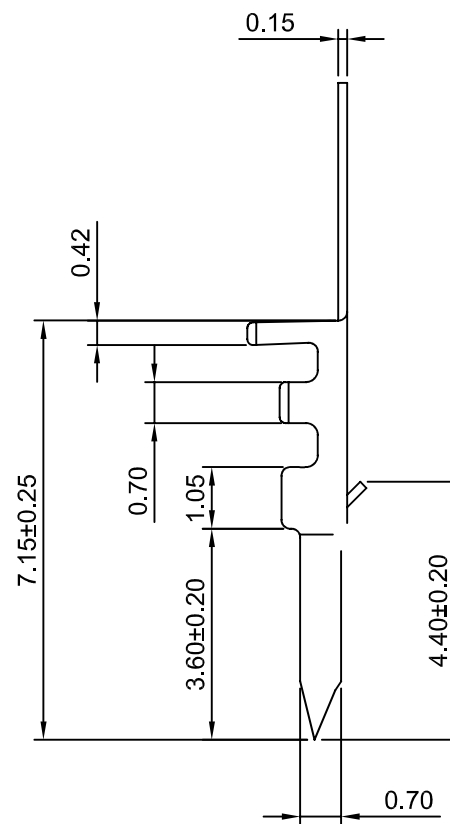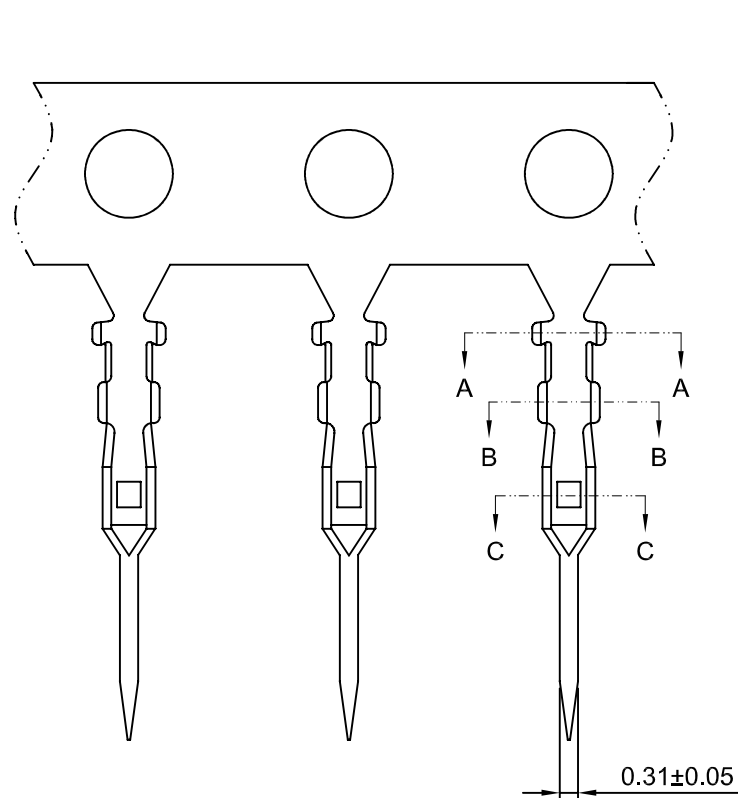

SEC:A-A



SEC:B-B

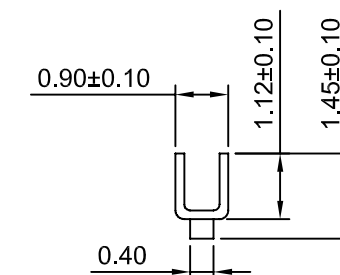

SEC:C-C

# Ordering information & Specifications

Unit:mm

| Part No      | Wire Range | Insultion O.D. | Material        | Finish           | Qty/reel   |
|--------------|------------|----------------|-----------------|------------------|------------|
| HDGC1251M-TP | AWG#28-#32 | 1.00mm(max)    | Phosphor Bronze | Tin over Nickel  | 15,000 PCS |
| HDGC1251M-GP | AWG#28-#32 | 1.00mm(max)    | Phosphor Bronze | Gold over Nickel | 15,000 PCS |

Optional Gold plating available but MOQ requested











深圳市华德共创科技有限公司

Shenzhen Huade co-create Technology Co.,LTD

TEL : 0755-27129737

FAX : 0755-29940187

| -TOLERANCES-<br>UNLESS OTHERWISE SPECIFIED<br>公差参数表 |       |        |     | TITLE: 1.25mm Pitch<br>产品名称: Crimp Terminal |                               |
|-----------------------------------------------------|-------|--------|-----|---------------------------------------------|-------------------------------|
| X.X                                                 | ±0.30 | X.X°   | ±3° | APPD:<br>核准: XIE                            | PART NO:<br>产品编号: HDGC1251M-T |
| X.XX                                                | ±0.30 | X.XX°  | ±2° | CHECK:<br>校对: WANG                          | DATE                          |
| X.XXX                                               | ±0.10 | X.XXX° | ±1° | DRAW:<br>绘图: WANG                           | SCALE                         |
|                                                     |       |        |     | UNIT                                        | CODE NUMBER                   |
|                                                     |       |        |     | 2010-11-07                                  | 8:1 mm A008                   |

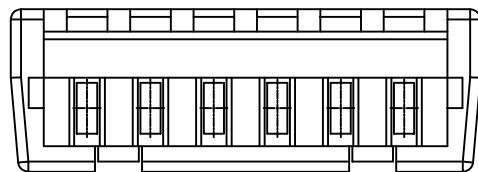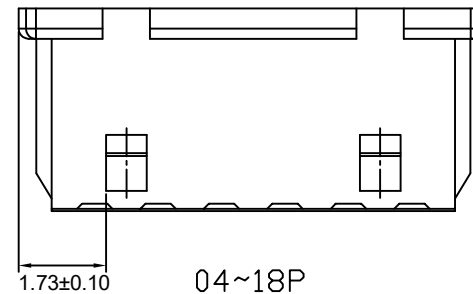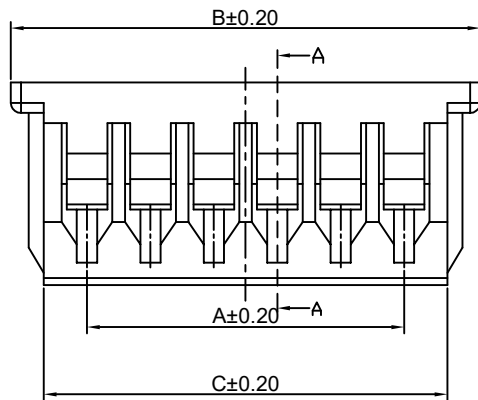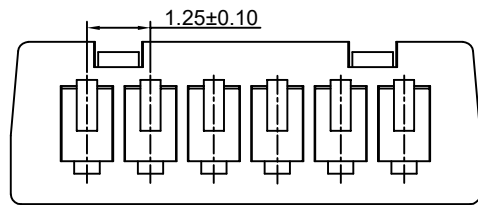

| Circuit No. | Dimensions |       |       |
|-------------|------------|-------|-------|
|             | A          | B     | C     |
| 02P         | 1.25       | 4.25  | 2.95  |
| 03P         | 2.50       | 5.50  | 4.20  |
| 04P         | 3.75       | 6.75  | 5.45  |
| 05P         | 5.00       | 8.00  | 6.70  |
| 06P         | 6.25       | 9.25  | 7.95  |
| 07P         | 7.50       | 10.50 | 9.20  |
| 08P         | 8.75       | 11.75 | 10.45 |
| 09P         | 10.00      | 13.00 | 11.70 |
| 10P         | 11.25      | 14.25 | 12.95 |
| 11P         | 12.50      | 15.50 | 14.20 |
| 12P         | 13.75      | 16.75 | 15.45 |
| 13P         | 15.00      | 18.00 | 16.70 |
| 14P         | 16.25      | 19.25 | 17.95 |
| 15P         | 17.50      | 20.50 | 19.20 |
| 16P         | 18.75      | 21.75 | 20.45 |
| 17P         | 20.00      | 23.00 | 21.70 |
| 18P         | 21.25      | 24.25 | 22.95 |

要求:

- 1、材质: PA66白色 UL94-V0;
- 2、外观: 外形无变形、缺胶等不良;
- 3、尺寸: 所有尺寸均符合检测标准;
- 4、包装: 胶袋封装, 最小包装量2K/包。




深圳市华德共创科技有限公司

Shenzhen Huade co-create Technology Co.,LTD

TEL : 0755-27129737

FAX : 0755-29940187

-TOLERANCES-  
UNLESS OTHERWISE SPECIFIED  
公差参数表



TITLE:  
产品名称: 1.25mm Pitch Housing

X.X ±0.30 X.X° ±3°

APPD:  
核准: XIE

PART NO:  
产品编号: HDGC1251H-XP

X.XX ±0.30 X.XX° ±2°

CHECK:  
校对: WANG





DATE SCALE UNIT CODE NUMBER

X.XXX ±0.10 X.XXX° ±1°

DRAW:  
绘图: WANG

2010-05-18 1:1 mm A008

| 修订<br>REV | 标记<br>MARK | 修改摘要<br>REVISION DESCRIPTION | 签名<br>SIGNATURE | 日期<br>DATE |
|-----------|------------|------------------------------|-----------------|------------|
| A0        |            | NEW RELEASE                  | WANG            | 2010-11-07 |
|           |            |                              |                 |            |

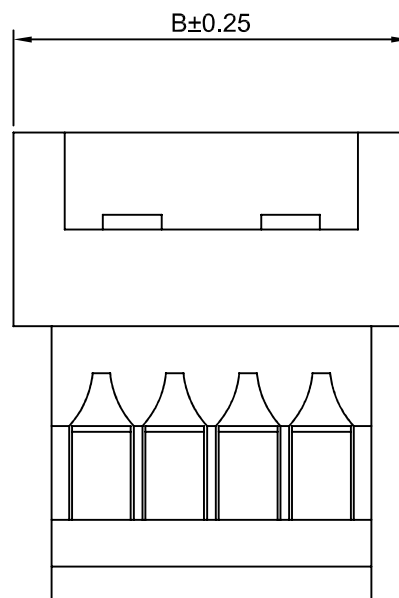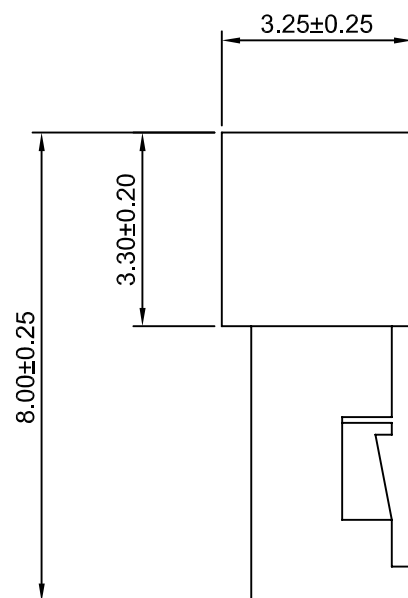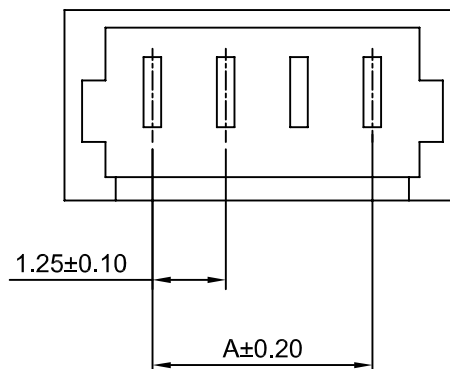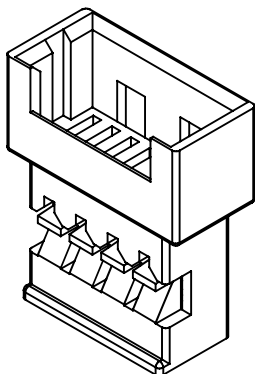

Ordering Information & Dimensions

| Circuits | Dimensions(mm) |       | Circuits | Dimensions(mm) |       |
|----------|----------------|-------|----------|----------------|-------|
|          | A              | B     |          | A              | B     |
| 2P       | 1.25           | 4.25  | 12P      | 13.75          | 16.75 |
| 3P       | 2.50           | 5.50  | 13P      | 15.00          | 18.00 |
| 4P       | 3.75           | 6.75  | 14P      | 16.25          | 19.25 |
| 5P       | 5.00           | 8.00  | 15P      | 17.50          | 20.50 |
| 6P       | 6.25           | 9.25  | 16P      | 18.75          | 21.75 |
| 7P       | 7.50           | 10.50 | 17P      | 20.00          | 23.00 |
| 8P       | 8.75           | 11.75 | 18P      | 21.25          | 24.25 |
| 9P       | 10.00          | 13.00 | 19P      | 22.50          | 25.50 |
| 10P      | 11.25          | 14.25 | 20P      | 23.75          | 26.75 |
| 11P      | 12.50          | 15.50 |          |                |       |

**SPECIFICATIONS:**

Current Rating: 1A AC,DC  
Voltage Rating: 125V AC,DC  
Temperature Range: -25°C ~ +85°C  
Contact Resistance: 20mΩ Max.  
Insulation Resistance: 100MΩ Min.  
Withstanding Voltage: 500V AC/minute  
Material: Nylon 66,UL94V-0(White)










深圳市华德共创科技有限公司

Shenzhen Huade co-create Technology Co.,LTD

TEL : 0755-27129737 FAX : 0755-29940187

| -TOLERANCES-<br>UNLESS OTHERWISE SPECIFIED<br>公差参数表 |       |        |     |               |      | TITLE:<br>产品名称: 1.25mm Pitch Housing |       |      |             |
|-----------------------------------------------------|-------|--------|-----|---------------|------|--------------------------------------|-------|------|-------------|
| X.X                                                 | ±0.30 | X.X°   | ±3° | APPD:<br>核准:  | XIE  | PART NO:<br>产品编号: HDGC1251HM-XP      |       |      |             |
| X.XX                                                | ±0.30 | X.XX°  | ±2° | CHECK:<br>校对: | WANG | DATE                                 | SCALE | UNIT | CODE NUMBER |
| X.XXX                                               | ±0.10 | X.XXX° | ±1° | DRAW:<br>绘图:  | WANG | 2010-11-07                           | 8:1   | mm   | A008        |

| 修订<br>REV | 标记<br>MARK | 修改摘要<br>REVISION DESCRIPTION | 签名<br>SIGNATURE | 日期<br>DATE |
|-----------|------------|------------------------------|-----------------|------------|
| A0        |            | NEW RELEASE                  | WANG            | 2010-11-07 |
|           |            |                              |                 |            |

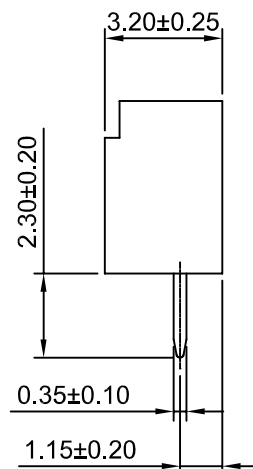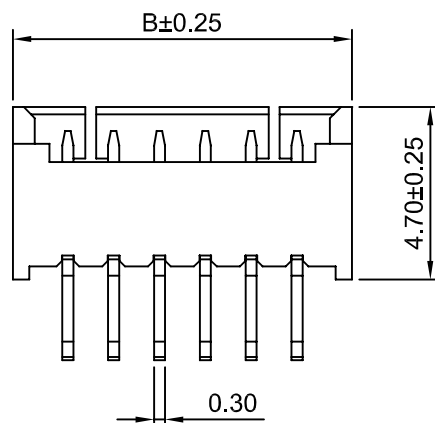

Ordering Information & Dimensions

| Circuits | Dimensions(mm) |       | Circuits | Dimensions(mm) |       |
|----------|----------------|-------|----------|----------------|-------|
|          | A              | B     |          | A              | B     |
| 2P       | 1.25           | 4.30  | 12P      | 13.75          | 16.80 |
| 3P       | 2.50           | 5.55  | 13P      | 15.00          | 18.05 |
| 4P       | 3.75           | 6.80  | 14P      | 16.25          | 19.30 |
| 5P       | 5.00           | 8.05  | 15P      | 17.50          | 20.55 |
| 6P       | 6.25           | 9.30  | 16P      | 18.75          | 21.80 |
| 7P       | 7.50           | 10.55 | 17P      | 20.00          | 23.05 |
| 8P       | 8.75           | 11.80 | 18P      | 21.25          | 24.30 |
| 9P       | 10.00          | 13.05 | 19P      | 22.50          | 25.55 |
| 10P      | 11.25          | 14.30 | 20P      | 23.75          | 26.80 |
| 11P      | 12.50          | 15.55 |          |                |       |

#### SPECIFICATIONS:

Current Rating: 1A AC,DC  
Voltage Rating: 125V AC,DC  
Temperature Range: -25°C ~ +85°C  
Contact Resistance: 20mΩ Max.  
Insulation Resistance: 100MΩ Min.  
Withstanding Voltage: 500V AC/minute  
Pin Material: Phosphor Bronze/Tin over Nickel  
Material: Nylon 66,UL94V-0(Beige)








深圳市华德共创科技有限公司

Shenzhen Huade co-create Technology Co.,LTD

TEL : 0755-27129737 FAX : 0755-29940187

| -TOLERANCES-<br>UNLESS OTHERWISE SPECIFIED<br>公差参数表 |       |            |       | TITLE:<br>产品名称: 1.25mm Pitch<br>180° Wafer |             |
|-----------------------------------------------------|-------|------------|-------|--------------------------------------------|-------------|
| X.X                                                 | ±0.30 | X.X°       | ±3°   | APPD:<br>核准:                               | XIE         |
| X.XX                                                | ±0.30 | X.XX°      | ±2°   | CHECK:<br>校对:                              | WANG        |
| X.XXX                                               | ±0.10 | X.XXX°     | ±1°   | DRAW:<br>绘图:                               | WANG        |
| PART NO:<br>产品编号:                                   |       | DATE       | SCALE | UNIT                                       | CODE NUMBER |
| HDGC1251WV-XP                                       |       | 2010-11-07 | 5:1   | mm                                         | A008        |

| 修订<br>REV | 标记<br>MARK | 修改摘要<br>REVISION DESCRIPTION | 签名<br>SIGNATURE | 日期<br>DATE |
|-----------|------------|------------------------------|-----------------|------------|
| A0        |            | NEW RELEASE                  | WANG            | 2010-11-07 |
|           |            |                              |                 |            |

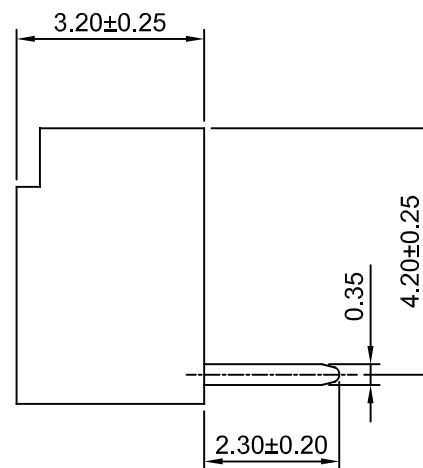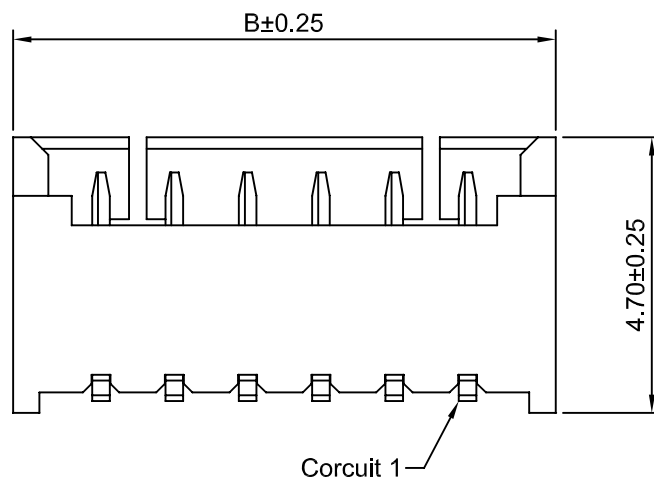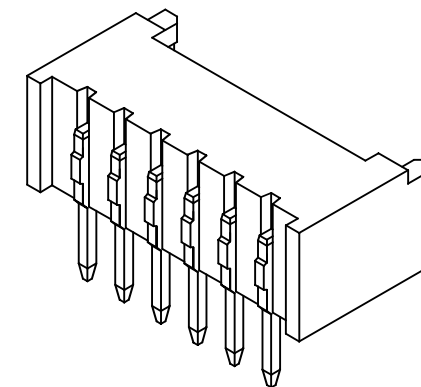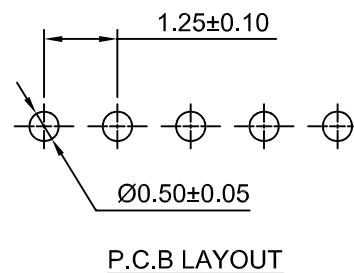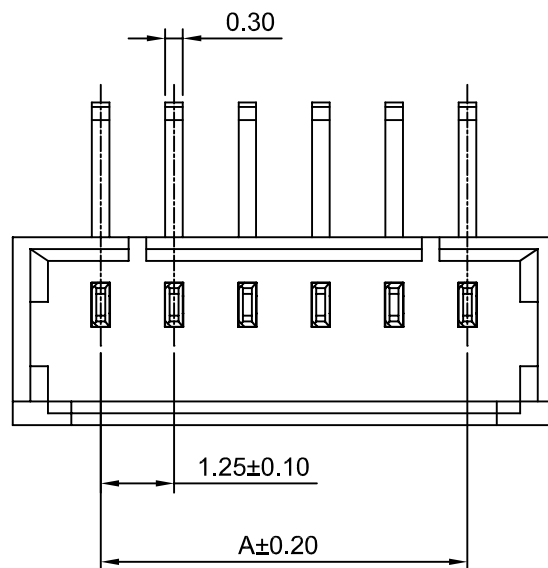

Ordering Information & Dimensions

| Circuits | Dimensions(mm) |       | Circuits | Dimensions(mm) |       |
|----------|----------------|-------|----------|----------------|-------|
|          | A              | B     |          | A              | B     |
| 2P       | 1.25           | 4.30  | 12P      | 13.75          | 16.80 |
| 3P       | 2.50           | 5.55  | 13P      | 15.00          | 18.05 |
| 4P       | 3.75           | 6.80  | 14P      | 16.25          | 19.30 |
| 5P       | 5.00           | 8.05  | 15P      | 17.50          | 20.55 |
| 6P       | 6.25           | 9.30  | 16P      | 18.75          | 21.80 |
| 7P       | 7.50           | 10.55 | 17P      | 20.00          | 23.05 |
| 8P       | 8.75           | 11.80 | 18P      | 21.25          | 24.30 |
| 9P       | 10.00          | 13.05 | 19P      | 22.50          | 25.55 |
| 10P      | 11.25          | 14.30 | 20P      | 23.75          | 26.80 |
| 11P      | 12.50          | 15.55 |          |                |       |





# SPECIFICATIONS:

Current Rating: 1A AC,DC  
Voltage Rating: 125V AC,DC  
Temperature Range: -25°C ~ +85°C  
Contact Resistance: 20mΩ Max.  
Insulation Resistance: 100MΩ Min.  
Withstanding Voltage: 500V AC/minute  
Pin Material: Phosphor Bronze/Tin over Nickel  
Material: Nylon 66,UL94V-0(Ivory)

深圳市华德共创科技有限公司  
Shenzhen Huade co-create Technology Co.,LTD  
TEL : 0755-27129737 FAX : 0755-29940187

|                                                     |       |        |     |               |      |                                           |             |
|-----------------------------------------------------|-------|--------|-----|---------------|------|-------------------------------------------|-------------|
| -TOLERANCES-<br>UNLESS OTHERWISE SPECIFIED<br>公差参数表 |       |        |     |               |      | TITLE:<br>产品名称: 1.25mm Pitch<br>90° Wafer |             |
| X.X                                                 | ±0.30 | X.X°   | ±3° | APPD:<br>核准:  | XIE  | PART NO:<br>产品编号: HDGC1251WR-XP           |             |
| X.XX                                                | ±0.30 | X.XX°  | ±2° | CHECK:<br>校对: | WANG | DATE                                      | SCALE       |
| X.XXX                                               | ±0.10 | X.XXX° | ±1° | DRAW:<br>绘图:  | WANG | 2010-11-07                                | 8:1         |
|                                                     |       |        |     |               |      | UNIT                                      | CODE NUMBER |
|                                                     |       |        |     |               |      | mm                                        | A008        |

| 修订<br>REV | 标记<br>MARK | 修改摘要<br>REVISION DESCRIPTION | 签名<br>SIGNATURE | 日期<br>DATE |
|-----------|------------|------------------------------|-----------------|------------|
| A0        |            | NEW RELEASE                  | WANG            | 2010-11-07 |
|           |            |                              |                 |            |

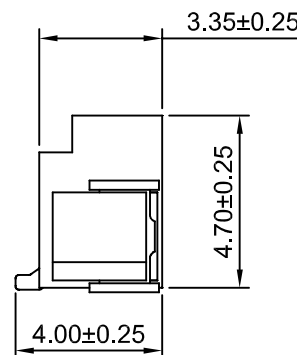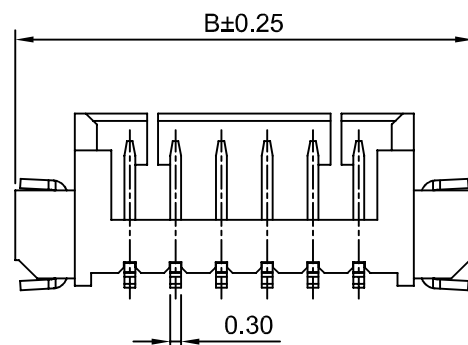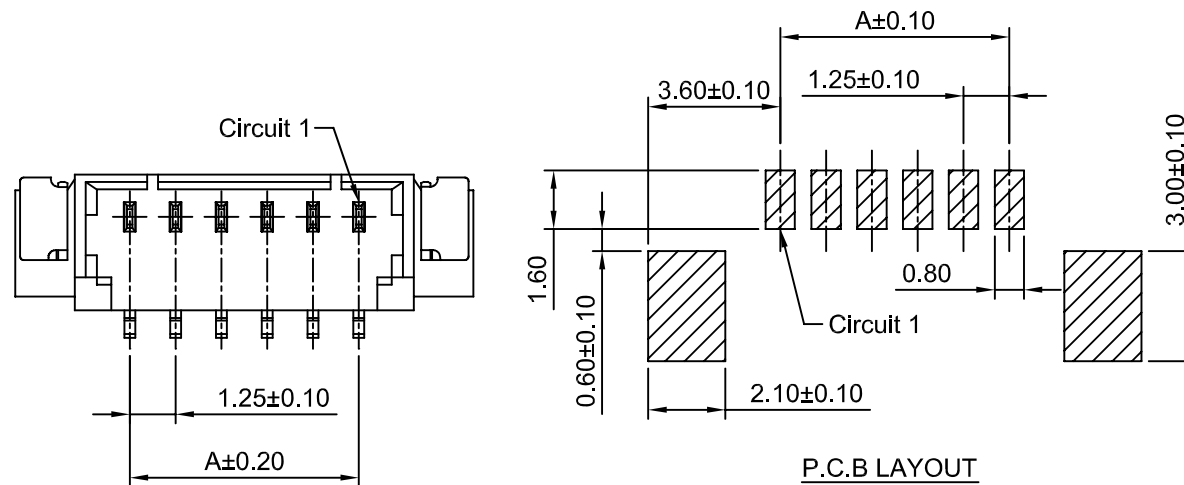

#### Ordering Information & Dimensions

| Circuits | Dimensions(mm) |       | Circuits | Dimensions(mm) |       |
|----------|----------------|-------|----------|----------------|-------|
|          | A              | B     |          | A              | B     |
| 2P       | 1.25           | 7.25  | 10P      | 11.25          | 17.25 |
| 3P       | 2.50           | 8.50  | 11P      | 12.50          | 18.50 |
| 4P       | 3.75           | 9.75  | 12P      | 13.75          | 19.75 |
| 5P       | 5.00           | 11.00 | 13P      | 15.00          | 21.00 |
| 6P       | 6.25           | 12.25 | 14P      | 16.25          | 22.25 |
| 7P       | 7.50           | 13.50 | 15P      | 17.50          | 23.50 |
| 8P       | 8.75           | 14.75 | 16P      | 18.75          | 24.75 |
| 9P       | 10.00          | 16.00 |          |                |       |

#### SPECIFICATIONS:

Current Rating: 1A AC,DC  
 Voltage Rating: 125V AC,DC  
 Temperature Range: -25°C ~ +85°C  
 Contact Resistance: 20mΩ Max.  
 Insulation Resistance: 100MΩ Min.  
 Withstanding Voltage: 500V AC/minute  
 Pin Material: Phosphor Bronze/Tin over Nickel  
 Solder Tabs: Phosphor Bronze/Tin over Nickel  
 Material: Nylon 6T, UL94V-0(Ivory)




深圳市华德共创科技有限公司

Shenzhen Huade co-create Technology Co.,LTD

TEL : 0755-27129737 FAX : 0755-29940187

|                                                     |       |            |                                                                                       |      |                                         |       |      |             |
|-----------------------------------------------------|-------|------------|---------------------------------------------------------------------------------------|------|-----------------------------------------|-------|------|-------------|
| -TOLERANCES-<br>UNLESS OTHERWISE SPECIFIED<br>公差参数表 |       |            |  |      | TITLE: 1.25mm Pitch<br>产品名称: 180° Wafer |       |      |             |
| X.X                                                 | ±0.30 | X.X° ±3°   | APPD:<br>核准:                                                                          | XIE  | PART NO:<br>产品编号: HDGC1251WV-S-XP       |       |      |             |
| X.XX                                                | ±0.30 | X.XX° ±2°  | CHECK:<br>校对:                                                                         | WANG | DATE                                    | SCALE | UNIT | CODE NUMBER |
| X.XXX                                               | ±0.10 | X.XXX° ±1° | DRAW:<br>绘图:                                                                          | WANG | 2010-11-07                              | 5:1   | mm   | A008        |

| 修订<br>REV | 标记<br>MARK | 修改摘要<br>REVISION DESCRIPTION | 签名<br>SIGNATURE | 日期<br>DATE |
|-----------|------------|------------------------------|-----------------|------------|
| A0        |            | NEW RELEASE                  | WANG            | 2010-11-07 |
|           |            |                              |                 |            |

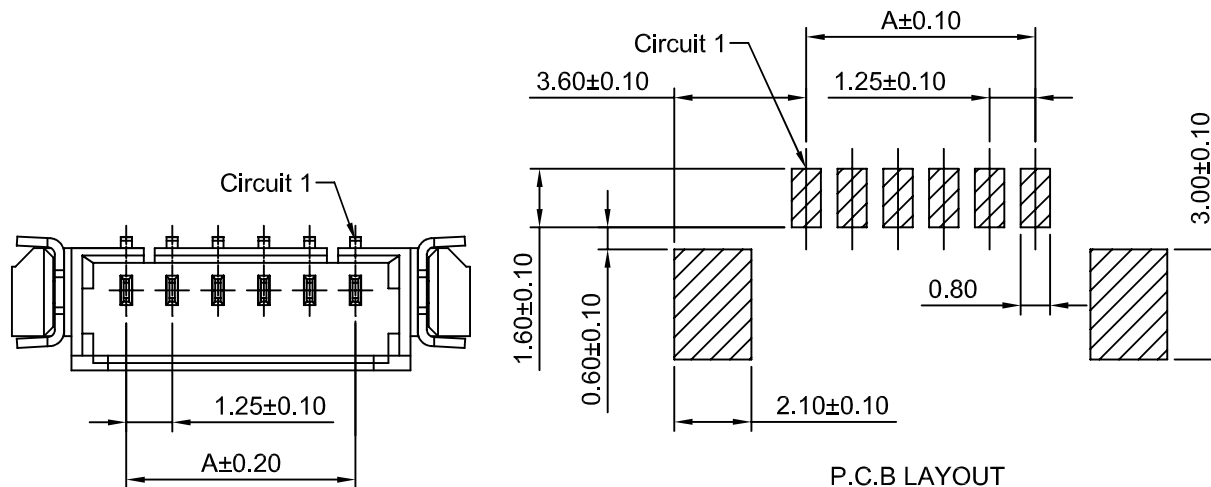

P.C.B LAYOUT



Ordering Information:  
HDGC1251WR-S-XP - \*\*  
1 2

1.Part No.

2.Finish:

(blank): Tin over Nickel

G: Gold over Nickel

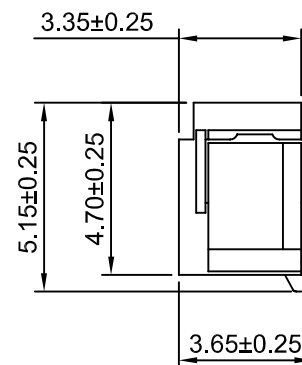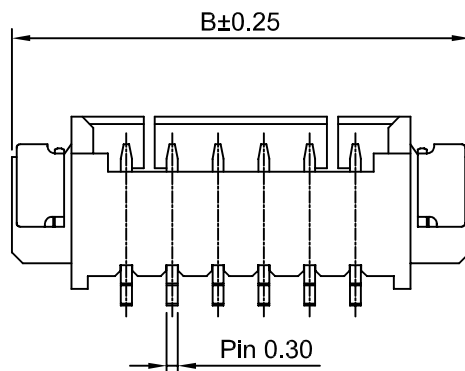

Ordering Information & Dimensions

| Circuits | Dimensions(mm) |       | Circuits | Dimensions(mm) |       |
|----------|----------------|-------|----------|----------------|-------|
|          | A              | B     |          | A              | B     |
| 2P       | 1.25           | 7.25  | 10P      | 11.25          | 17.25 |
| 3P       | 2.50           | 8.50  | 11P      | 12.50          | 18.50 |
| 4P       | 3.75           | 9.75  | 12P      | 13.75          | 19.75 |
| 5P       | 5.00           | 11.00 | 13P      | 15.00          | 21.00 |
| 6P       | 6.25           | 12.25 | 14P      | 16.25          | 22.25 |
| 7P       | 7.50           | 13.50 | 15P      | 17.50          | 23.50 |
| 8P       | 8.75           | 14.75 | 16P      | 18.75          | 24.75 |
| 9P       | 10.00          | 16.00 |          |                |       |

SPECIFICATIONS:

Current Rating: 1A AC,DC

Voltage Rating: 125V AC,DC

Temperature Range: -25°C ~ +85°C

Contact Resistance: 20mΩ Max.

Insulation Resistance: 100MΩ Min.

Withstanding Voltage: 500V AC/minute

Pin Material:Phosphor Bronze/Tin over Nickel

Solder Tabs: Phosphor Bronze/Tin over Nickel

Material: LCP,UL94V-0(Ivory)



深圳市华德共创科技有限公司

Shenzhen Huade co-create Technology Co.,LTD







TEL : 0755-27129737

FAX : 0755-29940187

| -TOLERANCES-<br>OTHERWISE SPECIFIED<br>公差参数表 |       |        |     |  |      | TITLE: 1.25mm Pitch<br>产品名称: 90° Wafer |       |      |             |
|----------------------------------------------|-------|--------|-----|---------------------------------------------------------------------------------------|------|----------------------------------------|-------|------|-------------|
| X.X                                          | ±0.30 | X.X°   | ±3° | APPD:<br>核准:                                                                          | XIE  | PART NO:<br>产品编号: HDGC1251WR-S-XP      |       |      |             |
| X.XX                                         | ±0.30 | X.XX°  | ±2° | CHECK:<br>校对:                                                                         | WANG | DATE                                   | SCALE | UNIT | CODE NUMBER |
| X.XXX                                        | ±0.10 | X.XXX° | ±1° | DRAW:<br>绘图:                                                                          | WANG | 2010-11-07                             | 5:1   | mm   | A008        |



| 修订<br>REV | 标记<br>MARK | 修改摘要<br>REVISION DESCRIPTION | 签名<br>SIGNATURE | 日期<br>DATE |
|-----------|------------|------------------------------|-----------------|------------|
| A0        |            | NEW RELEASE                  | WANG            | 2010-11-07 |

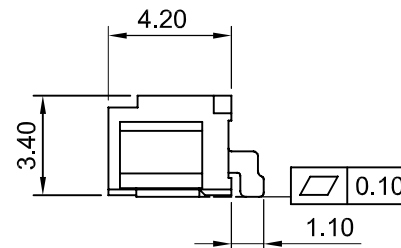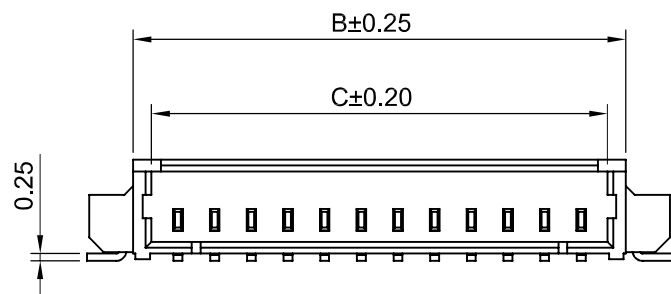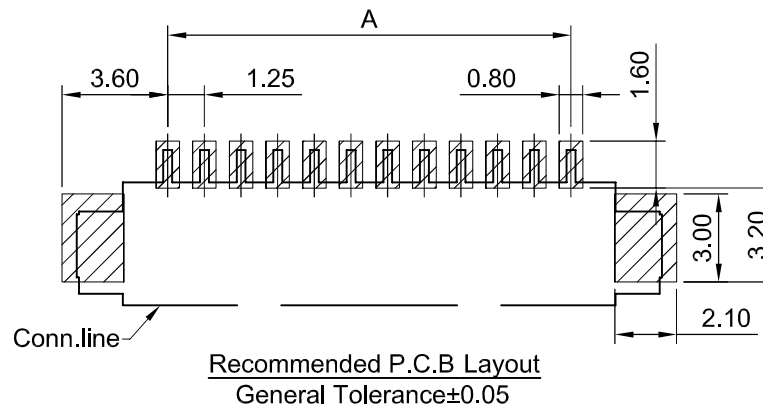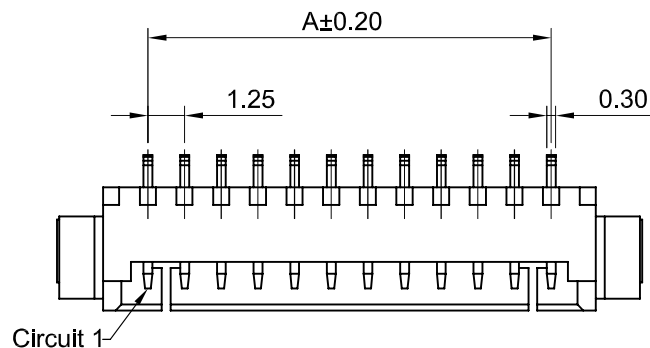

Ordering Information:  
HDGC1251WRA-S-XP - \*\*  
1 2

- Part No.
- Finish:  
(blank): Tin over Nickel  
G: Gold over Nickel

#### Ordering Information & Dimensions

| Circuits | Dimensions(mm) |       |       | Circuits | Dimensions(mm) |       |       |
|----------|----------------|-------|-------|----------|----------------|-------|-------|
|          | A              | B     | C     |          | A              | B     | C     |
| 2P       | 1.25           | 4.25  | 3.05  | 12P      | 13.75          | 16.75 | 15.55 |
| 3P       | 2.50           | 5.50  | 4.30  | 13P      | 15.00          | 18.00 | 16.80 |
| 4P       | 3.75           | 6.75  | 5.55  | 14P      | 16.25          | 19.25 | 18.05 |
| 5P       | 5.00           | 8.00  | 6.80  | 15P      | 17.50          | 20.50 | 19.30 |
| 6P       | 6.25           | 9.25  | 8.05  | 16P      | 18.75          | 21.75 | 20.55 |
| 7P       | 7.50           | 10.50 | 9.30  | 17P      | 20.00          | 23.00 | 21.80 |
| 8P       | 8.75           | 11.75 | 10.55 | 18P      | 21.25          | 24.25 | 23.05 |
| 9P       | 10.00          | 13.00 | 11.80 | 19P      | 22.50          | 25.50 | 24.30 |
| 10P      | 11.25          | 14.25 | 13.05 | 20P      | 23.75          | 26.75 | 25.55 |
| 11P      | 12.50          | 15.50 | 14.30 |          |                |       |       |

#### SPECIFICATIONS:

Current Rating: 1A AC,DC  
Voltage Rating: 125V AC,DC  
Temperature Range: -25°C ~ +85°C  
Contact Resistance: 20mΩ Max.  
Insulation Resistance: 100MΩ Min.  
Withstanding Voltage: 500V AC/minute  
Pin Material: Phosphor Bronze/Tin over Nickel  
Solder Tabs: Phosphor Bronze/Tin over Nickel  
Material: Nylon 9T,UL94V-0(Natural)



深圳市华德共创科技有限公司

Shenzhen Huade co-create Technology Co.,LTD

TEL : 0755-27129737 FAX : 0755-29940187

| -TOLERANCES-<br>UNLESS OTHERWISE SPECIFIED<br>公差参数表 |       |        |  |                    | TITLE: 1.25mm Pitch<br>产品名称: 90° Wafer |       |      |             |
|-----------------------------------------------------|-------|--------|---------------------------------------------------------------------------------------|--------------------|----------------------------------------|-------|------|-------------|
| X.X                                                 | ±0.30 | X.X°   | ±3°                                                                                   | APPD:<br>核准: XIE   | PART NO:<br>产品编号: HDGC1251WRA-S-XP     |       |      |             |
| X.XX                                                | ±0.30 | X.XX°  | ±2°                                                                                   | CHECK:<br>校对: WANG | DATE                                   | SCALE | UNIT | CODE NUMBER |
| X.XXX                                               | ±0.10 | X.XXX° | ±1°                                                                                   | DRAW:<br>绘图: WANG  | 2010-11-07                             | 4:1   | mm   | A008        |