
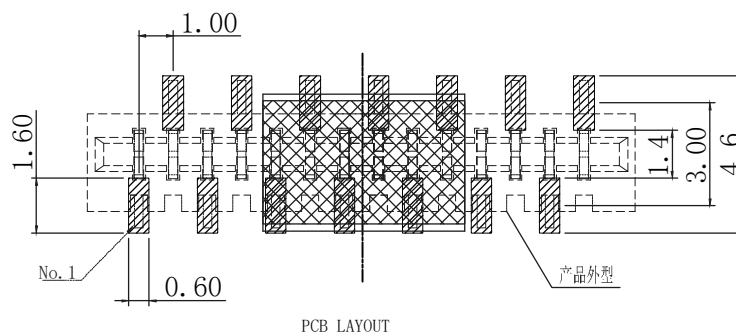
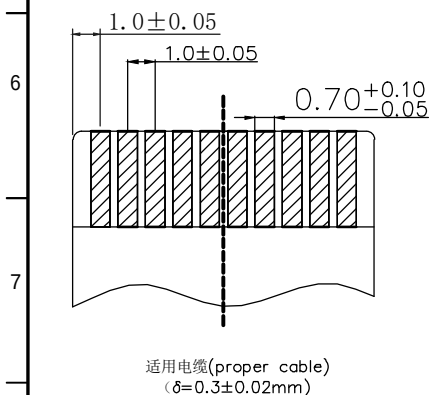
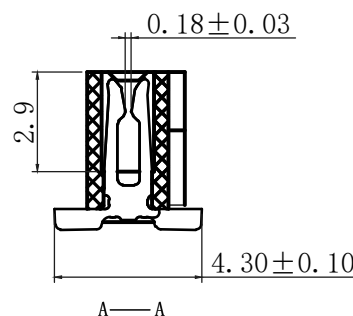
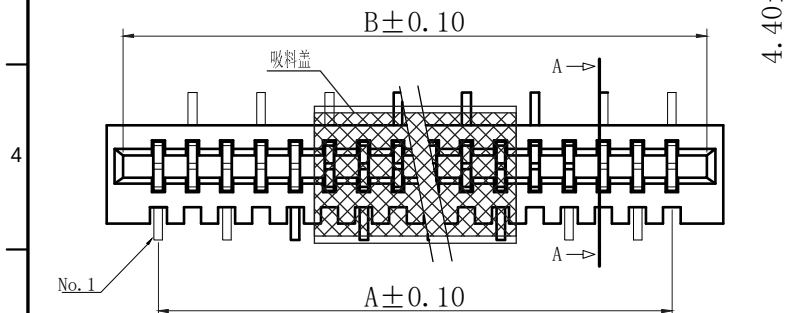

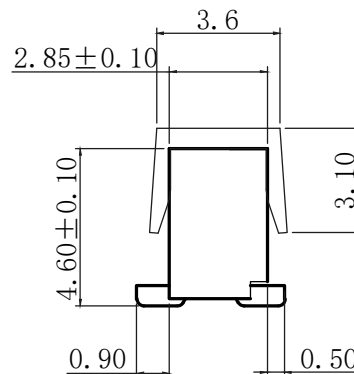


修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE
A0		NEW RELEASE	黄艳兰	2020-10-15

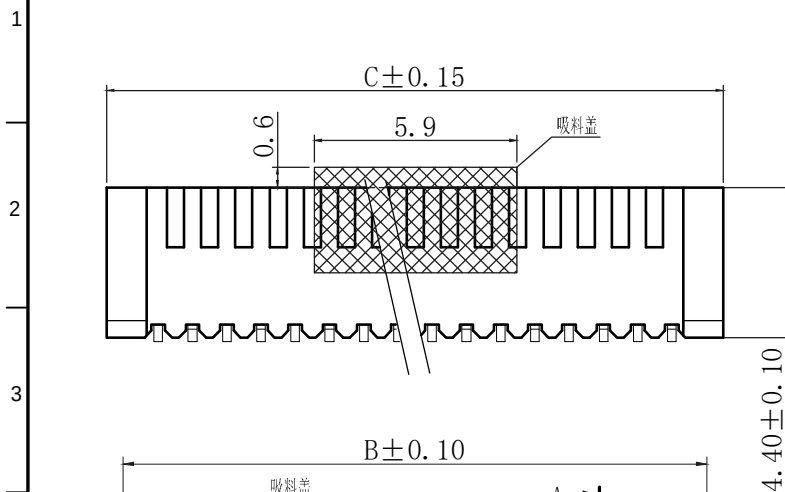

技术参数 SPECIFICATIONS

间距 (Pitch): 1.0
极数 (Poles): 3~40
额定电压 (Voltage rating): 50V DC/AC
额定电流 (Current rating): 0.5 A DC/AC
耐压值 (Withstand Voltage): 500VAC/m
工作温度 (Working Temperature): -25℃~+85℃
绝缘电阻 (Insulation Resistance): ≥500MΩ
接触电阻 (Contact resistance): ≤30mΩ
双面接触 (Double-sided contact)

材料 Material

接触件 (Contact): 磷青铜 t=0.25 镀亮锡
Phosphor Bronze Tin-plated
塑胶主体 (Housing): LCP BK 耐热树脂 (UL94V-0) Heat resistance plastic (UL94V-0)

孔位 Poles	A	B	C
3	2.00	4.10	5.00
4	3.00	5.10	6.00
5	4.00	6.10	7.00
6	5.00	7.10	8.00
7	6.00	8.10	9.00
8	7.00	9.10	10.00
9	8.00	10.10	11.00
10	9.00	11.10	12.00
11	10.00	12.10	13.00
12	11.00	13.10	14.00
13	12.00	14.10	15.00
14	13.00	15.10	16.00
15	14.00	16.10	17.00
16	15.00	17.10	18.00
17	16.00	18.10	19.00
18	17.00	19.10	20.00
19	18.00	20.10	21.00
20	19.00	21.10	22.00
21	20.00	22.10	23.00
22	21.00	23.10	24.00
23	22.00	24.10	25.00
24	23.00	25.10	26.00
25	24.00	26.10	27.00
26	25.00	27.10	28.00
27	26.00	28.10	29.00
28	27.00	29.10	30.00
29	28.00	30.10	31.00
30	29.00	31.10	32.00
31	30.00	32.10	33.00
32	31.00	33.10	34.00
33	32.00	34.10	35.00
34	33.00	35.10	36.00
35	34.00	36.10	37.00
36	35.00	37.10	38.00
37	36.00	38.10	39.00
38	37.00	39.10	40.00
39	38.00	40.10	41.00
40	39.00	41.10	42.00

				深圳市华德共创科技有限公司			
Shenzhen Huade co-create Technology Co.,LTD				TEL: 0755-27129737 FAX: 0755-29940187			
-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表				TITLE: 产品名称: 1.0 Pitch 无盖立式正脚位			
X.X	±0.30	X.X°	±3°	APPD: 核准: 谢亮	PART NO: 产品编号: 1.0-B-nPBG		
X.XX	±0.30	X.XX°	±2°	CHECK: 校对: 王建业	DATE	SCALE	UNIT
X.XXX	±0.10	X.XXX°	±1°	DRAW: 绘图: 黄艳兰	2020-10-15	1:1	mm
				CODE NUMBER A231			