


修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE
A0		NEW RELEASE	WANG	2016-11-25


Circuit 1




0.80±0.10

A±0.20

B±0.25



1.65±0.20

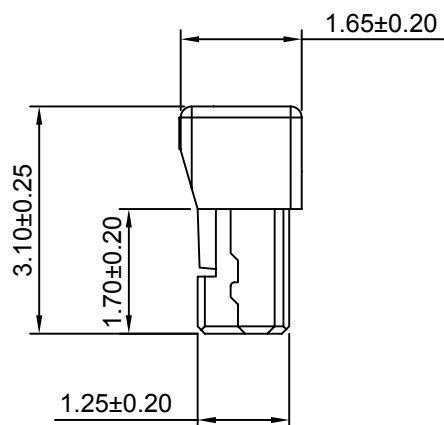

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	0.80	2.40	12P	8.80	10.40
3P	1.60	3.20	13P	9.60	11.20
4P	2.40	4.00	14P	10.40	12.00
5P	3.20	4.80	15P	11.20	12.80
6P	4.00	5.60	16P	12.00	13.60
7P	4.80	6.40	17P	12.80	14.40
8P	5.60	7.20	18P	13.60	15.20
9P	6.40	8.00	19P	14.40	16.00
10P	7.20	8.80	20P	15.20	16.80
11P	8.00	9.60			

SPECIFICATIONS:

Current Rating: 1A AC,DC

Voltage Rating: 30V AC,DC

Temperature Range: -25°C~+85°C

Contact Resistance: 30mΩ Max.

Insulation Resistance: 100MΩ Min.

Withstanding Voltage: 200V AC/minute

Material: PA66 , UL94V-0(Natural)



深圳市华德共创科技有限公司

Shenzhen Huade co-create Technology Co.,LTD

TEL : 0755-27129737 FAX : 0755-29940187

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表				TITLE: 产品名称: 0.80mm Pitch Housing	
X.X	±0.30	X.X°	±3°	APPD: 核准:	XIE
X.XX	±0.30	X.XX°	±2°	CHECK: 校对:	WANG
X.XXX	±0.10	X.XXX°	±1°	DRAW: 绘图:	WANG
				PART NO: 产品编号:	HDGC0801H-XP-2
				DATE	SCALE
				UNIT	CODE NUMBER
				2016-11-25	1:1
				mm	A001