
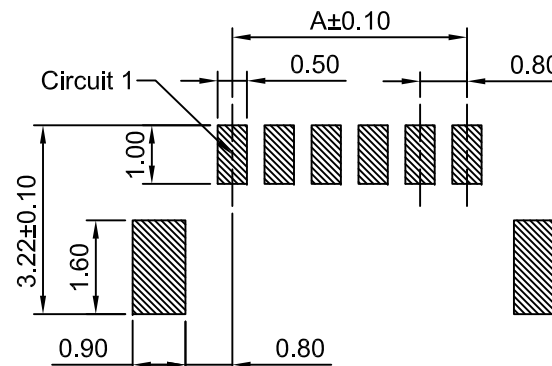




修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE
A0		NEW RELEASE	WANG	2012-12-10

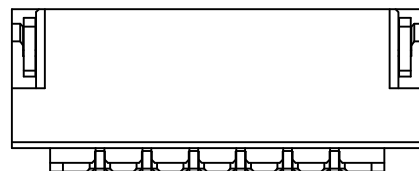

P.C.B LAYOUT
TOLERANCE:±0.05

Ordering Information & Dimensions

PART NO.	Dimensions(mm)		
	A	B	C
2P	0.80	3.80	3.20
3P	1.60	4.60	4.00
4P	2.40	5.40	4.80
5P	3.20	6.20	5.60
6P	4.00	7.00	6.40
7P	4.80	7.80	7.20
8P	5.60	8.60	8.00
9P	6.40	9.40	8.80
10P	7.20	10.20	9.60
11P	8.00	11.00	10.40
12P	8.80	11.80	11.20
13P	9.60	12.60	12.00
14P	10.40	13.40	12.80
15P	11.20	14.20	13.60
16P	12.00	15.00	14.40
17P	12.80	15.80	15.20
18P	13.60	16.60	16.00
19P	14.40	17.40	16.80
20P	15.20	18.20	17.60

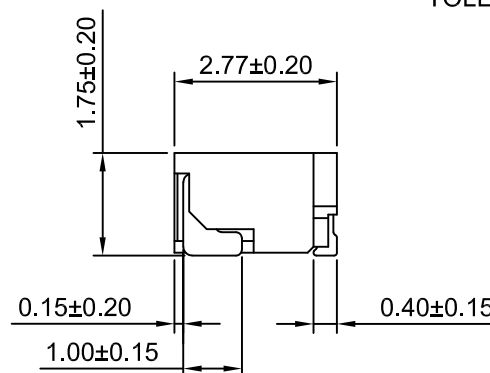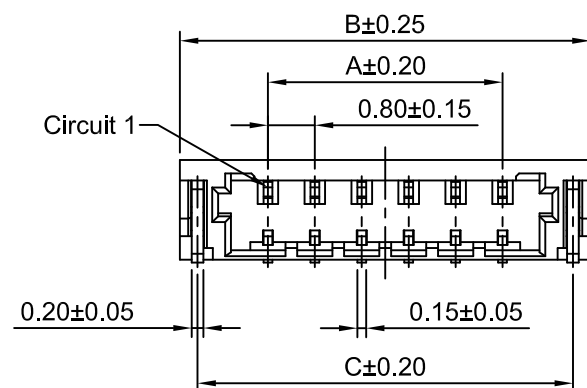

SPECIFICATIONS:

Current Rating:1A AC,DC
Voltage Rating: 100V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 20mΩ Max
Insulation Resistance: 100MΩ Min
Withstanding Voltage: 200V AC/minute
Pin Material: Phosphor Bronze
Solder tabs: Brass/Tin over Nickel
Material: LCP,UL94V-0(Beige)



深圳市华德共创科技有限公司

Shenzhen Huade co-create Technology Co.,LTD

TEL : 0755-27129737

FAX : 0755-29940187

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表				TITLE: 产品名称: 0.80mm Pitch 90° Wafer	
X.X	±0.30	X.X°	±3°	APPD: 核准:	XIE
X.XX	±0.30	X.XX°	±2°	CHECK: 校对:	WANG
X.XXX	±0.10	X.XXX°	±1°	DRAW: 绘图:	WANG
				PART NO: 产品编号:	HDGC0801WRA-S-XP
				DATE	SCALE
				UNIT	CODE NUMBER
				2012-12-10	10:1 mm A008