



修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNA TURE	日期 DATE
A0		NEW RELEEASE	WANG	2017-08-23

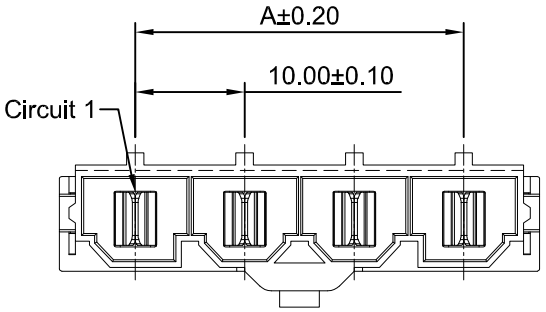


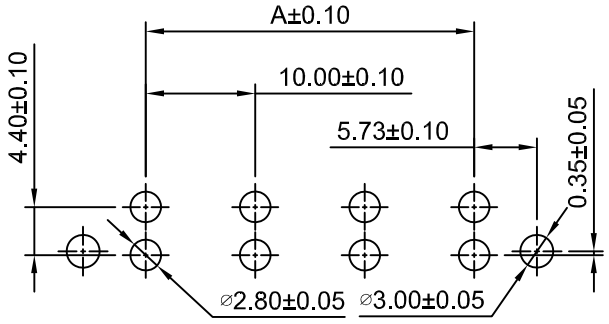


P.C.B LAYOUT

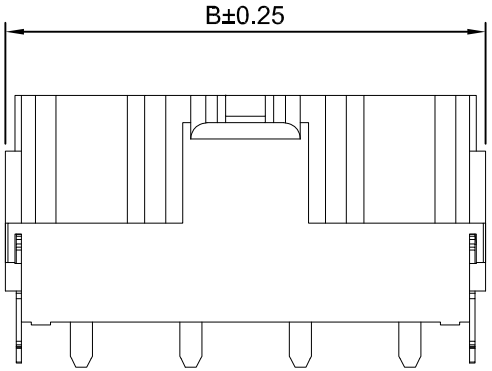

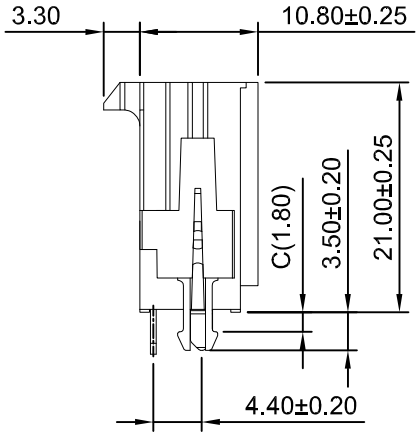





5P



2P



6P



3P

Ordering Information:

HDGC10001WVA-XP - * - ****

1 2 3

1.Part No.

2.Finish:

(Blank):Tin over Nickel (Ni:50u" /Tin:100u")

G:Gold over Nickel(Au:30u" /Ni:50u" /Tin:100u")


3.Size C:

(Blank):1.80mm(P.C.B Board thickness:1.57mm)

C260:2.60mm(P.C.B Board thickness:2.36mm)

C340:3.40mm(P.C.B Board thickness:3.18mm)

C658:6.58mm(P.C.B Board thickness:6.35mm)

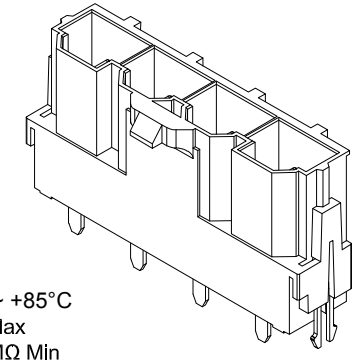

SPECIFICATIONS:

Current Rating: 50A AC,DC
Voltage Rating: 600V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Pin Material: Phosphor Bronze/Tin over Nickel
Material: Nylon 46+30%GF,UL94V-0(Black)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	10.00	23.82	5P	40.00	53.82
3P	20.00	33.82	6P	50.00	63.82
4P	30.00	43.82			

深圳市华德共创科技有限公司
SHENZHEN HUADE CO-CREATE TECHNOLOGY CO.,LTD
TEL：0755-27129737 FAX：0755-29940187

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表						TITLE: 产品名称：	10.00mm Pitch 180° Wafer		
X.X	±0.30	X.X°	±3°	APPD: 核准：	XIE	PART NO: 产品编号：	HDGC10001WVA-XP		
X.XX	±0.30	X.XX°	±2°	CHECK: 校对：	WANG	DATE	SCALE	UNIT	CODE NUMBER
X.XXX	±0.10	X.XXX°	±1°	DRAW: 绘图：	WANG	2017-08-23	1.5:1	mm	A008