
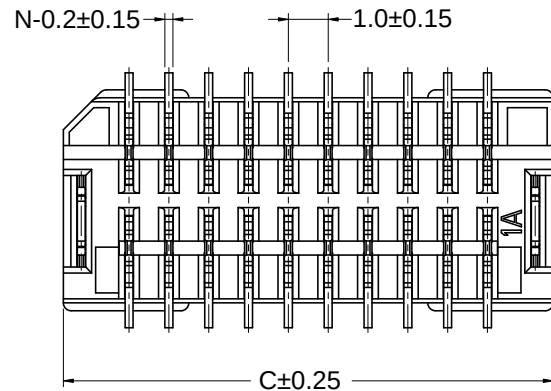
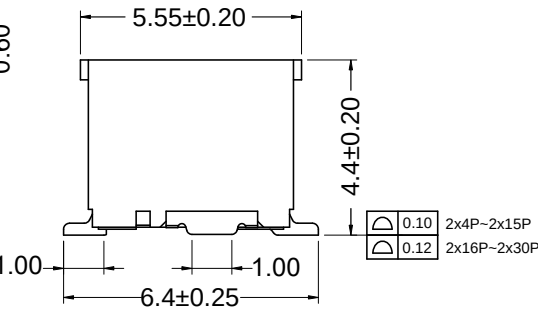
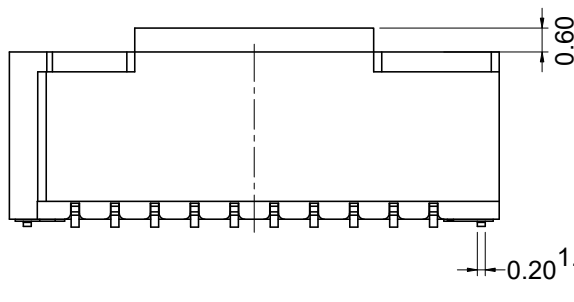
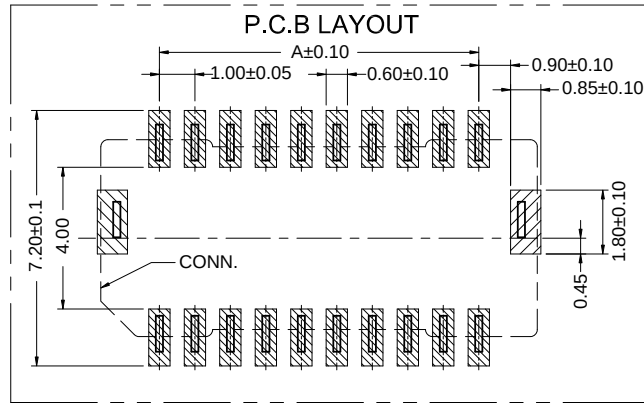
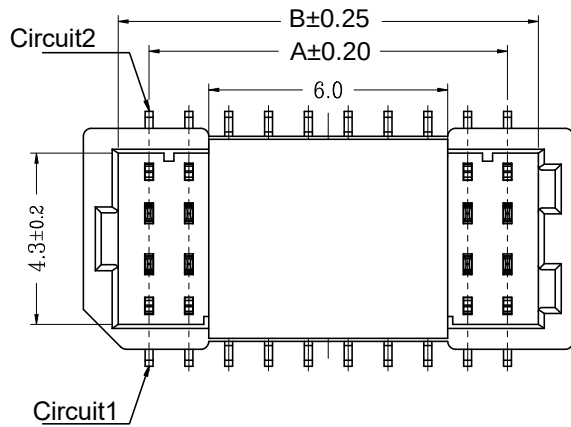


SPECIFICATIONS:

Current Rating: 1A AC,DC
Voltage Rating: 50V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 20MΩ Max.
Insulation Resistance: 100MΩ Min.
Withstanding Voltage: 500V AC/minute
Pin Material: PhosphorBronze/Gold over Nickel
Material: Nylon 10T,UL94V-0(Natural)

修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE
A0		NEW RELEASE	WANG	2019-09-03

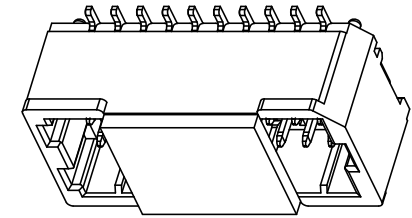

Ordering Information & Dimensions:

PART NO.	Dimensions (mm)		
	A	B	C
2x4P	3.00	4.55	6.30
2x5P	4.00	5.55	7.30
2x6P	5.00	6.55	8.30
2x7P	6.00	7.55	9.30
2x8P	7.00	8.55	10.30
2x9P	8.00	9.55	11.30
2x10P	9.00	10.55	12.30
2x11P	10.00	11.55	13.30
2x12P	11.00	12.55	14.30
2x15P	14.00	15.55	17.30
2x20P	19.00	20.55	22.30
2x25P	24.00	25.55	27.30
2x30P	29.00	30.55	32.30

HDGC 深圳市华德共创科技有限公司
Shenzhen Huade co-create Technology Co.,LTD
TEL : 0755-27129737 FAX : 0755-29940187

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表						TITLE: 1.00mm Pitch 产品名称: 180° Wafer			
X.X	±0.30	X.X°	±3°	APPD: 核准:	XIE	PART NO: HDGC1002WV-S-2xXP 产品编号:			
X.XX	±0.30	X.XX°	±2°	CHECK: 校对:	WANG	DATE	SCALE	UNIT	CODE NUMBER
X.XXX	±0.10	X.XXX°	±1°	DRAW: 绘图:	WANG	2019-09-03	1:1	mm	A003