










| 修订<br>REV | 标记<br>MARK | 修改摘要<br>REVISION DESCRIPTION | 签名<br>SIGNATURE | 日期<br>DATE |
|-----------|------------|------------------------------|-----------------|------------|
| A0        |            | NEW RELEASE                  | WANG            | 2015-07-06 |
|           |            |                              |                 |            |



SECTION B-B



SECTION A-A

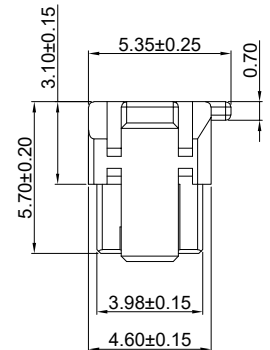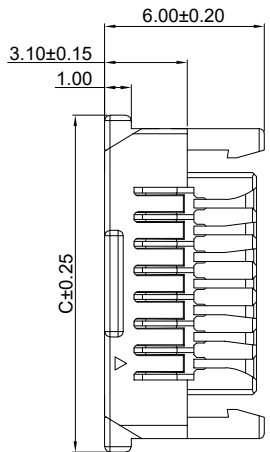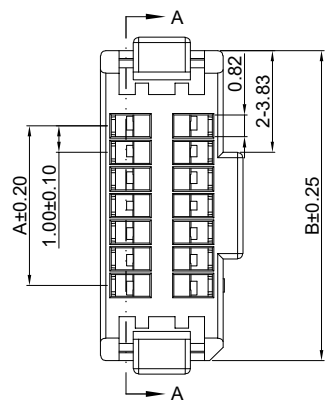

| POLES | DIM A | DIM B | DIM C | DIM D | DIM E |
|-------|-------|-------|-------|-------|-------|
| 2x2P  | 1.00  | 6.65  | 7.65  | 3.35  | 2.75  |
| 2x3P  | 2.00  | 7.65  | 8.65  | 4.35  | 3.75  |
| 2x4P  | 3.00  | 8.65  | 9.65  | 5.35  | 4.75  |
| 2x5P  | 4.00  | 9.65  | 10.65 | 6.35  | 5.75  |
| 2x6P  | 5.00  | 10.65 | 11.65 | 7.35  | 6.75  |
| 2x7P  | 6.00  | 11.65 | 12.65 | 8.35  | 7.75  |
| 2x8P  | 7.00  | 12.65 | 13.65 | 9.35  | 8.75  |
| 2x9P  | 8.00  | 13.65 | 14.65 | 10.35 | 9.75  |
| 2x10P | 9.00  | 14.65 | 15.65 | 11.35 | 10.75 |
| 2x11P | 10.00 | 15.65 | 16.65 | 12.35 | 11.75 |
| 2x12P | 11.00 | 16.65 | 17.65 | 13.35 | 12.75 |
| 2x15P | 14.00 | 19.65 | 20.65 | 16.35 | 15.75 |
| 2x20P | 19.00 | 24.65 | 25.65 | 21.35 | 20.75 |

# SPECIFICATIONS:


Current Rating: 1A AC,DC  
Voltage Rating: 50V AC,DC  
Temperature Range: -25°C ~ +85°C  
Contact Resistance: 40mΩ Max.  
Insulation Resistance: 100MΩ Min.  
Withstanding Voltage: 500V AC/minute  
Material: PA66 UL94V-0(Natural)



深圳市华德共创科技有限公司

Shenzhen Huade co-create Technology Co.,LTD

TEL : 0755-27129737 FAX : 0755-29940187

|                                                     |       |                                                                                       |     |                                      |                |      |             |
|-----------------------------------------------------|-------|---------------------------------------------------------------------------------------|-----|--------------------------------------|----------------|------|-------------|
| -TOLERANCES-<br>UNLESS OTHERWISE SPECIFIED<br>公差参数表 |       |  |     | TITLE:<br>产品名称: 1.00mm Pitch Housing |                |      |             |
| X.X                                                 | ±0.30 | X.X°                                                                                  | ±3° | APPD:<br>核准:                         | XIE            |      |             |
| X.XX                                                | ±0.30 | X.XX°                                                                                 | ±2° | CHECK:<br>校对:                        | WANG           |      |             |
| X.XXX                                               | ±0.10 | X.XXX°                                                                                | ±1° | DRAW:<br>绘图:                         | WANG           |      |             |
|                                                     |       |                                                                                       |     | PART NO:<br>产品编号:                    | HDGC1006H-2xXP |      |             |
|                                                     |       |                                                                                       |     | DATE                                 | SCALE          | UNIT | CODE NUMBER |
|                                                     |       |                                                                                       |     | 2015-07-06                           | 5:1            | mm   | A001        |