



修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE
A0		NEW RELEASE	WANG	2021-05-09

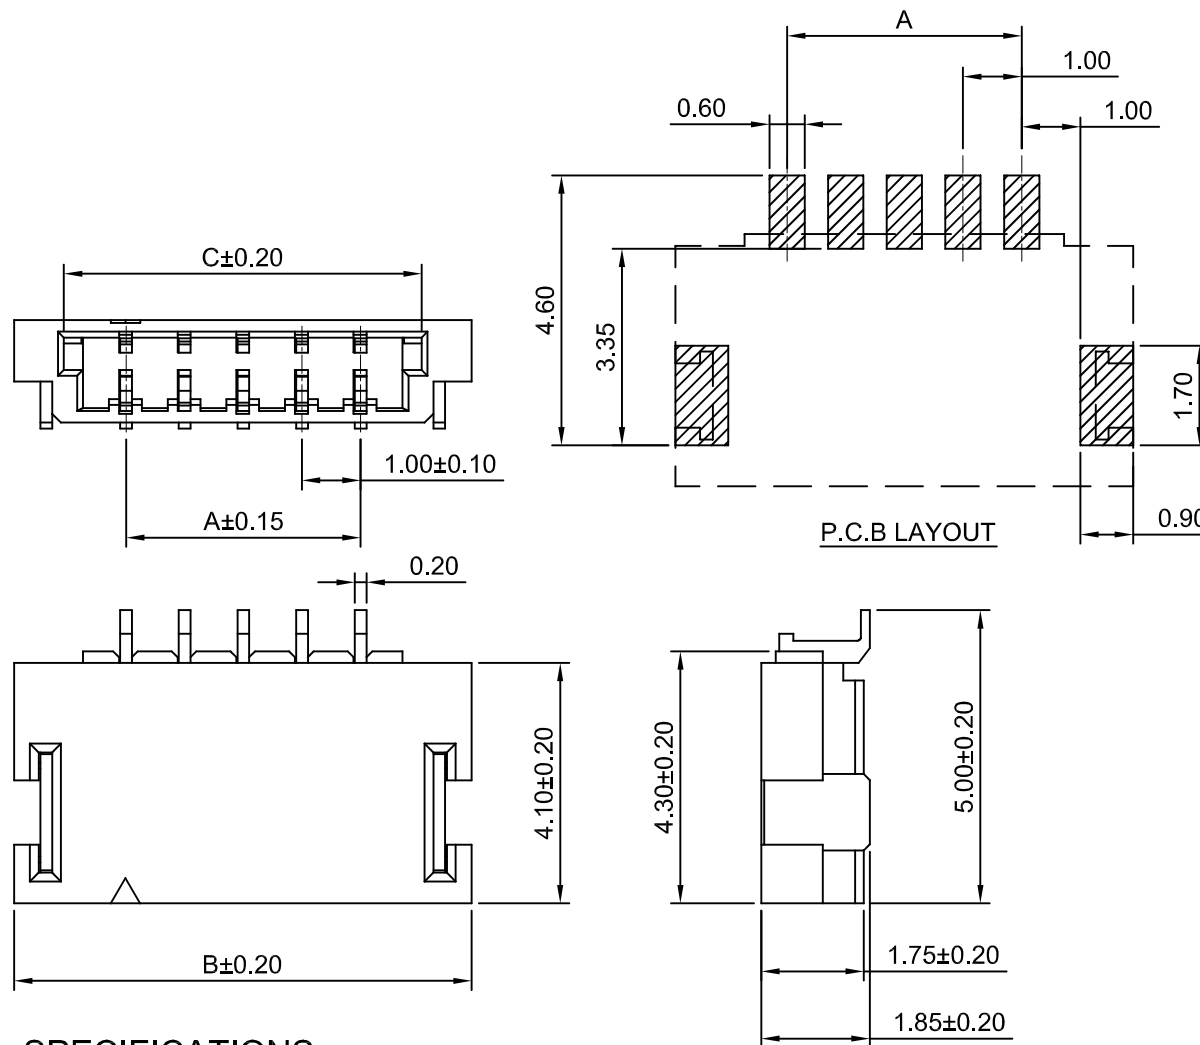

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2P	1.00	4.80	3.10	17P	16.00	19.80	18.10
3P	2.00	5.80	4.10	18P	17.00	20.80	19.10
4P	3.00	6.80	5.10	19P	18.00	21.80	20.10
5P	4.00	7.80	6.10	20P	19.00	22.80	21.10
6P	5.00	8.80	7.10	21P	20.00	23.80	22.10
7P	6.00	9.80	8.10	22P	21.00	24.80	23.10
8P	7.00	10.80	9.10	23P	22.00	25.80	24.10
9P	8.00	11.80	10.10	24P	23.00	26.80	25.10
10P	9.00	12.80	11.10	25P	24.00	27.80	26.10
11P	10.00	13.80	12.10	26P	25.00	28.80	27.10
12P	11.00	14.80	13.10	27P	26.00	29.80	28.10
13P	12.00	15.80	14.10	28P	27.00	30.80	29.10
14P	13.00	16.80	15.10	29P	28.00	31.80	30.10
15P	14.00	17.80	16.10	30P	29.00	32.80	31.10
16P	15.00	18.80	17.10				

SPECIFICATIONS:

Current Rating: 1A AC,DC
Voltage Rating: 50V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 20mΩ Max.
Insulation Resistance: 100MΩ Min.
Withstanding Voltage: 500V AC/minute
Pin Material: Phosphor Bronze/Tin over Nickel
Material: Nylon 6T,UL94V-0(Natural)



深圳市华德共创科技有限公司

Shenzhen Huade co-create Technology Co.,LTD
TEL : 0755-27129737 FAX : 0755-29940187

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表					TITLE: 1.00mm Pitch 产品名称: 90° Wafer			
X.X	±0.30	X.X°	±3°	APPD: 核准: XIE	PART NO: HDGC1006WR-S-XP 产品编号:			
X.XX	±0.30	X.XX°	±2°	CHECK: 校对: WANG	DATE	SCALE	UNIT	CODE NUMBER
X.XXX	±0.10	X.XXX°	±1°	DRAW: 绘图: WANG	2021-05-09	8:1	mm	A018