



修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNA TURE	日期 DATE
A0		NEW RELEEASE	WANG	2012-01-16

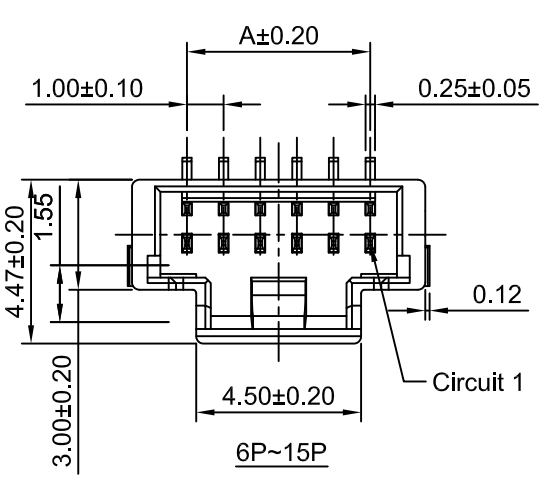

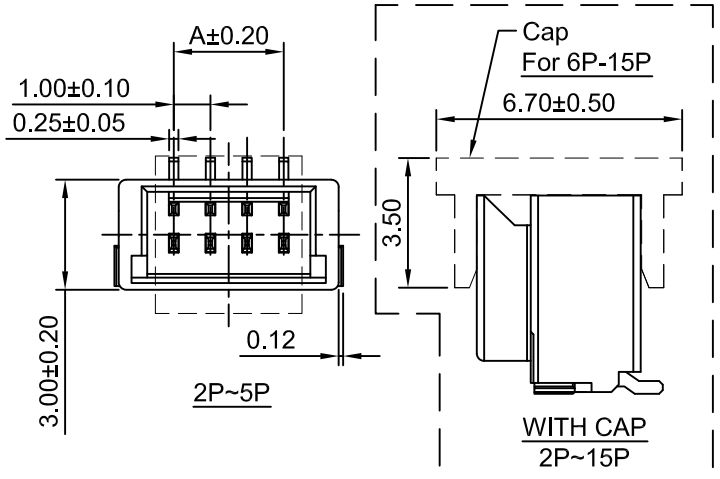

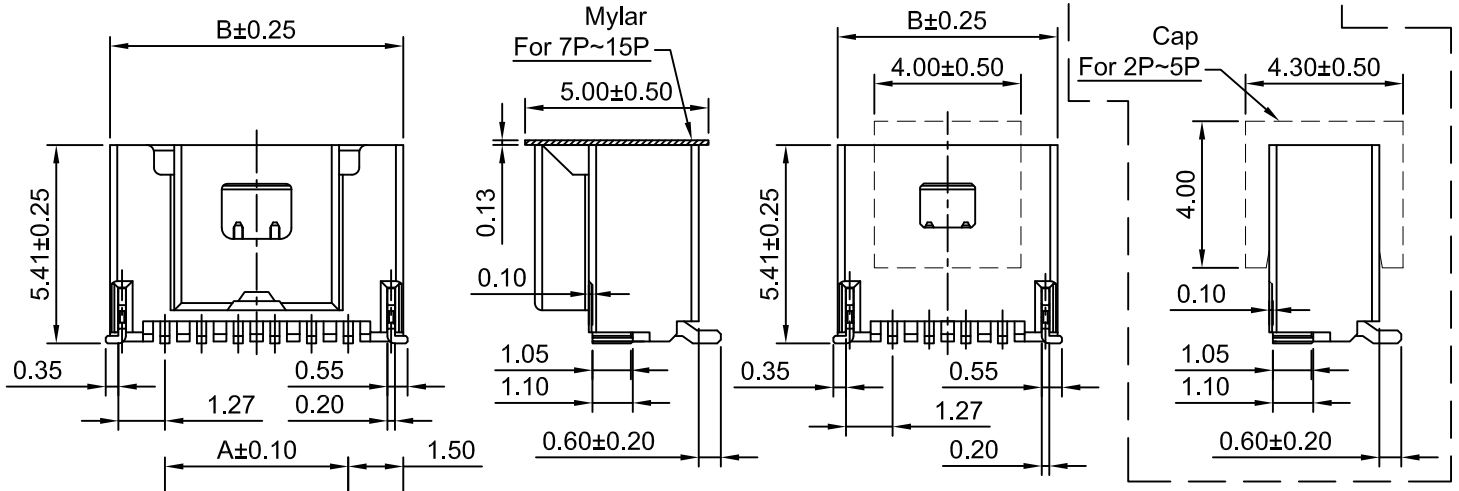

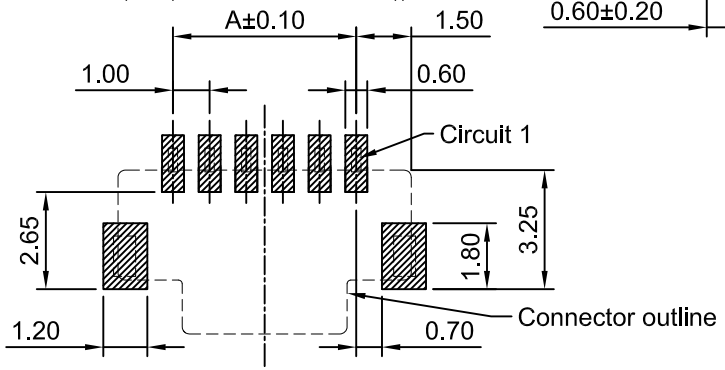

P.C.B LAYOUT (TOP VIEW)
TOLERANCE:±0.05

SPECIFICATIONS:

Current rating: 1A AC,DC
Voltage rating: 100V AC,DC
Temperature range: -40°C ~ +105°C
Contact resistance: 20mΩ Max.
Insulation resistance: 500MΩ Min.
Withstanding voltage: 500V AC/minute
Pin Material: Phosphor Bronze
Solder Tabs: Phosphor Bronze/Tin over Nickel
Material: Nylon 9T,UL94V-0(Beige)

Ordering Information & Dimensions

Circuits	Dimensions(mm)	
	A	B
2P	1.00	4.00
3P	2.00	5.00
4P	3.00	6.00
5P	4.00	7.00
6P	5.00	8.00
7P	6.00	9.00
8P	7.00	10.00
9P	8.00	11.00
10P	9.00	12.00
11P	10.00	13.00
12P	11.00	14.00
13P	12.00	15.00
14P	13.00	16.00
15P	14.00	17.00

深圳市华德共创科技有限公司
Shenzhen Huade co-create Technology Co.,LTD
TEL：0755-27129737 FAX：0755-29940187

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表							
X.X	±0.30	X.X°	±3°	APPD: 核准：	XIE	TITLE: 产品名称：	1.00mm Pitch 180 ° Wafer
X.XX	±0.30	X.XX°	±2°	CHECK: 校对：	WANG	PART NO: 产品编号：	HDGC1008WV-S-XP
X.XXX	±0.10	X.XXX°	±1°	DRAW: 绘图：	WANG	DATE: 2012-01-16	SCALE: 1:1 / UNIT: mm / CODE NUMBER: A008