


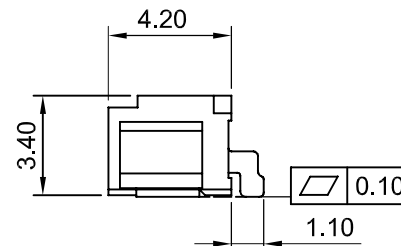
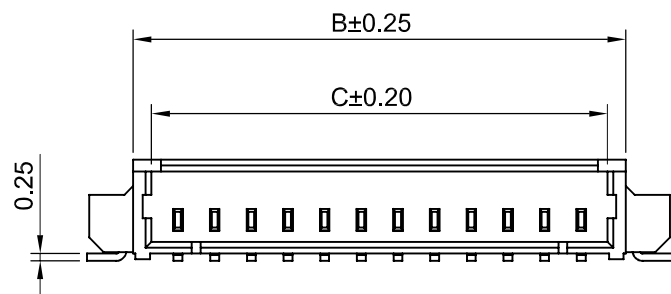
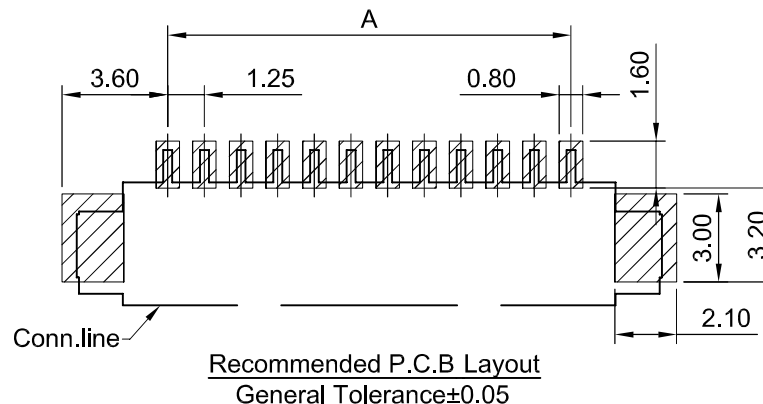


修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE
A0		NEW RELEASE	WANG	2010-11-07

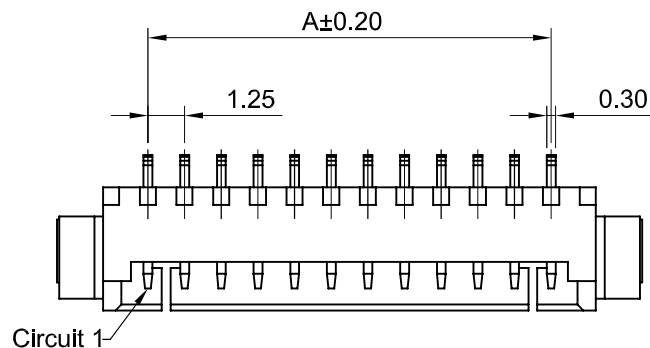

Ordering Information:
 HDGC1251WRA-S-XP - **
 1 2

- Part No.
- Finish:
 (blank): Tin over Nickel
 G: Gold over Nickel

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2P	1.25	4.25	3.05	12P	13.75	16.75	15.55
3P	2.50	5.50	4.30	13P	15.00	18.00	16.80
4P	3.75	6.75	5.55	14P	16.25	19.25	18.05
5P	5.00	8.00	6.80	15P	17.50	20.50	19.30
6P	6.25	9.25	8.05	16P	18.75	21.75	20.55
7P	7.50	10.50	9.30	17P	20.00	23.00	21.80
8P	8.75	11.75	10.55	18P	21.25	24.25	23.05
9P	10.00	13.00	11.80	19P	22.50	25.50	24.30
10P	11.25	14.25	13.05	20P	23.75	26.75	25.55
11P	12.50	15.50	14.30				

SPECIFICATIONS:

Current Rating: 1A AC,DC
 Voltage Rating: 125V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 20mΩ Max.
 Insulation Resistance: 100MΩ Min.
 Withstanding Voltage: 500V AC/minute
 Pin Material: Phosphor Bronze/Tin over Nickel
 Solder Tabs: Phosphor Bronze/Tin over Nickel
 Material: Nylon 9T,UL94V-0(Natural)

深圳市华德共创科技有限公司

Shenzhen Huade co-create Technology Co.,LTD

TEL : 0755-27129737 FAX : 0755-29940187

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表					TITLE: 1.25mm Pitch 产品名称: 90° Wafer		
X.X	±0.30	X.X°	±3°	APPD: 核准: XIE	PART NO: 产品编号: HDGC1251WRA-S-XP		
X.XX	±0.30	X.XX°	±2°	CHECK: 校对: WANG	DATE	SCALE	UNIT
X.XXX	±0.10	X.XXX°	±1°	DRAW: 绘图: WANG	2010-11-07	4:1	mm
					CODE	NUMBER	
					A008		