
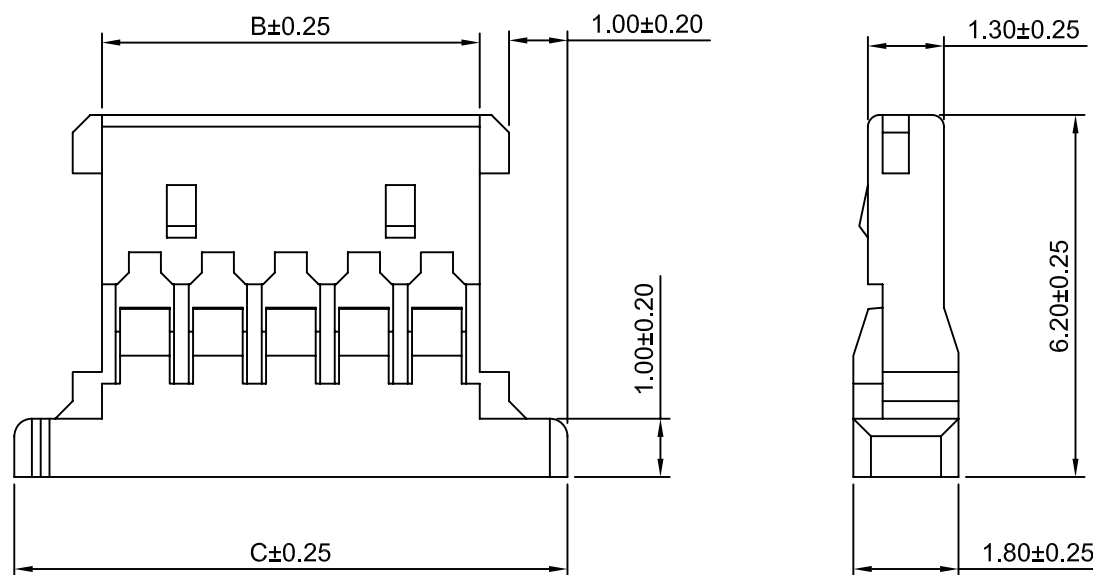


修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE
A0		NEW RELEASE	WANG	2010-05-20

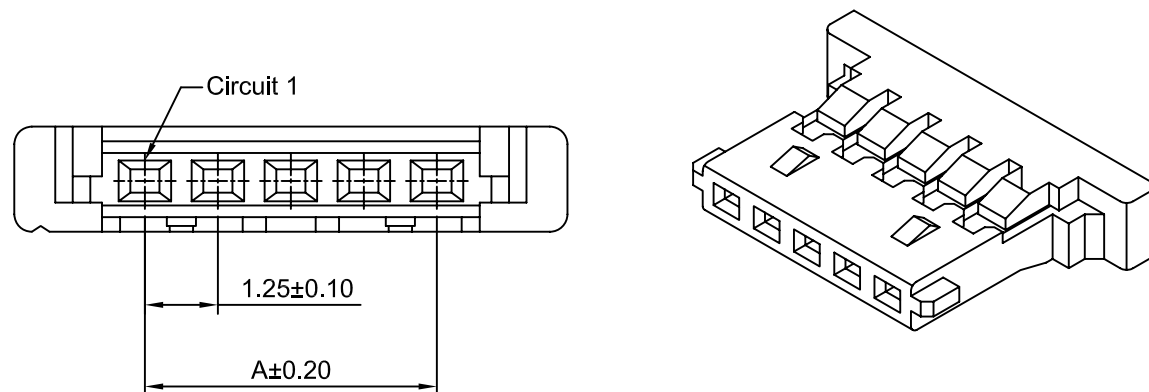

SPECIFICATIONS:

Current Rating: 1A AC,DC
Voltage Rating: 125V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 20mΩ Max.
Insulation Resistance: 100MΩ Min.
Withstanding Voltage: 500V AC/minute
Material: Nylon 66,UL94V-0(Beige)

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2P	1.25	2.72	5.72	20P	23.75	25.22	28.22
3P	2.50	3.97	6.97	30P	36.25	37.72	40.72
4P	3.75	5.22	8.22				
5P	5.00	6.47	9.47				
6P	6.25	7.72	10.72				
7P	7.50	8.97	11.97				
8P	8.75	10.22	13.22				
9P	10.00	11.47	14.47				
10P	11.25	12.72	15.72				
11P	12.50	13.97	16.97				
12P	13.75	15.22	18.22				
13P	15.00	16.47	19.47				
14P	16.25	17.72	20.72				
15P	17.50	18.97	21.97				
16P	18.75	20.22	23.22				



深圳市华德共创科技有限公司

Shenzhen Huade co-create Technology Co.,LTD

TEL : 0755-27129737 FAX : 0755-29940187

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表				TITLE: 产品名称: 1.25mm Pitch Housing	
X.X	±0.30	X.X°	±3°	APPD: 核准:	XIE
X.XX	±0.30	X.XX°	±2°	CHECK: 校对:	WANG
X.XXX	±0.10	X.XXX°	±1°	DRAW: 绘图:	WANG
				PART NO: 产品编号:	HDGC1254H-XP
				DATE	SCALE
				UNIT	CODE NUMBER
				2010-05-20	3:1 mm A001