


修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE
A0		NEW RELEASE	WANG	2015-06-07

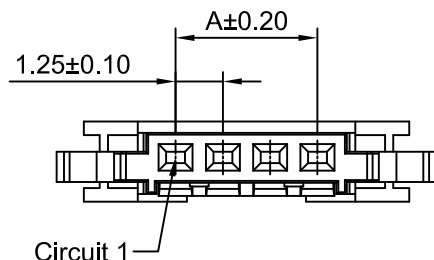

Ordering Information:

HDGC1254HA-XP - ***


1 2

1.Part No.

2.Material:

(blank): Nylon 66,UL94V-0

LCP: LCP,UL94V-0



Ordering Information & Dimensions

Circuits	Dimensions(mm)		
	A	B	C
2P	1.25	6.10	4.10
3P	2.50	7.35	5.35
4P	3.75	8.60	6.60
5P	5.00	9.85	7.85
6P	6.25	11.10	9.10
7P	7.50	12.35	10.35
8P	8.75	13.60	11.60
9P	10.00	14.85	12.85
10P	11.25	16.10	14.10
11P	12.50	17.35	15.35
12P	13.75	18.60	16.60
13P	15.00	19.85	17.85
14P	16.25	21.10	19.10
15P	17.50	22.35	20.35
16P	18.75	23.60	21.60
17P	20.00	24.85	22.85
18P	21.25	26.10	24.10
19P	22.50	27.35	25.35
20P	23.75	28.60	26.60
21P	25.00	29.85	27.85
22P	26.25	31.10	29.10
23P	27.50	32.35	30.35
24P	28.75	33.60	31.60
25P	30.00	34.85	32.85
26P	31.25	36.10	34.10
27P	32.50	37.35	35.35
28P	33.75	38.60	36.60
29P	35.00	39.85	37.85
30P	36.25	41.10	39.10

SPECIFICATIONS:

Current Rating: 1A AC,DC

Voltage Rating: 125V AC,DC

Temperature Range: -25°C ~ +85°C

Contact Resistance: 20mΩ Max.

Insulation Resistance: 100MΩ Min.

Withstanding Voltage: 500V AC/minute

Material: Nylon 66,UL94V-0(White)



深圳市华德共创科技有限公司

Shenzhen Huade co-create Technology Co.,LTD

TEL : 0755-27129737

FAX : 0755-29940187

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表						TITLE: 产品名称：1.25mm Pitch Housing			
X.X	±0.30	X.X°	±3°	APPD: 核准：	XIE	PART NO: 产品编号：HDGC1254HA-XP			
X.XX	±0.30	X.XX°	±2°	CHECK: 校对：	WANG	DATE	SCALE	UNIT	CODE NUMBE
X.XXX	±0.10	X.XXX°	±1°	DRAW: 绘图：	WANG	2015-06-07	5:1	mm	A008