

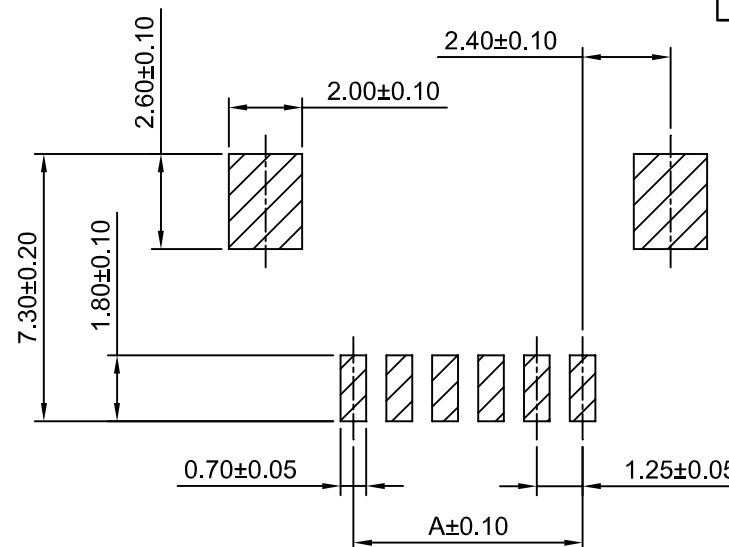

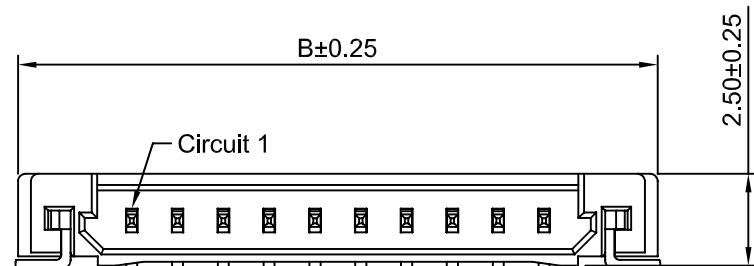


修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE
A0		NEW RELEASE	WANG	2017-02-10

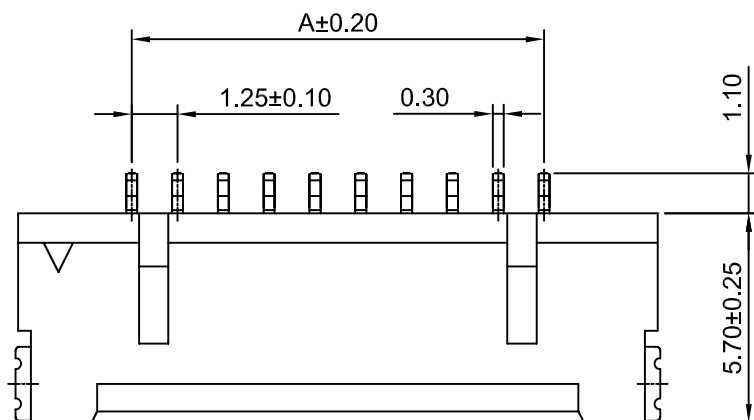

P.C.B. LAYOUT

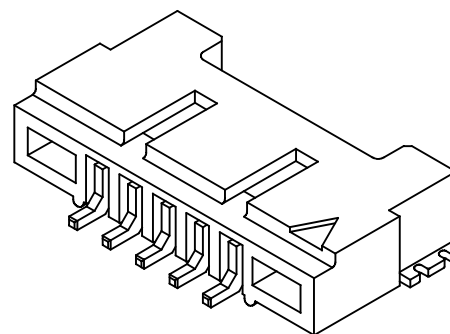

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	1.25	7.45	11P	12.50	18.70
3P	2.50	8.70	12P	13.75	19.95
4P	3.75	9.95	13P	15.00	21.20
5P	5.00	11.20	14P	16.25	22.45
6P	6.25	12.45	15P	17.50	23.70
7P	7.50	13.70	20P	23.75	29.95
8P	8.75	14.95	25P	30.00	36.20
9P	10.00	16.20	30P	36.25	42.45
10P	11.25	17.45			

SPECIFICATIONS:

Current Rating: 1A AC,DC
Voltage Rating: 150V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 30mΩ Max.
Insulation Resistance: 500MΩ Min.
Withstanding Voltage: 500V AC/minute
Pin Material: Brass/Tin over Nickel
Solder Tabs: Brass/Tin over Nickel
Material: LCP,UL94V-0(Ivory)

				深圳市华德共创科技有限公司 Shenzhen Huade co-create Technology Co.,LTD TEL : 0755-27129737 FAX : 0755-29940187			
-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表				TITLE: 1.25mm Pitch 产品名称: 90° Wafer			
X.X	±0.30	X.X°	±3°	PART NO: 产品编号: HDGC1255WR-S-XP			
X.XX	±0.30	X.XX°	±2°	CHECK:	DATE	SCALE	UNIT
X.XXX	±0.10	X.XXX°	±1°	DRAW:	2017-02-10	5:1	mm
				核准:	WANG		CODE NUMBER
				校对:			A008
				绘图:	WANG		