
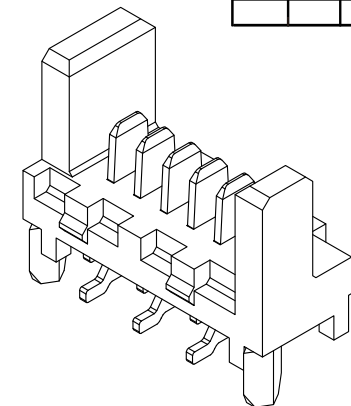


修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE
A0		NEW RELEASE	WANG	2017-01-10


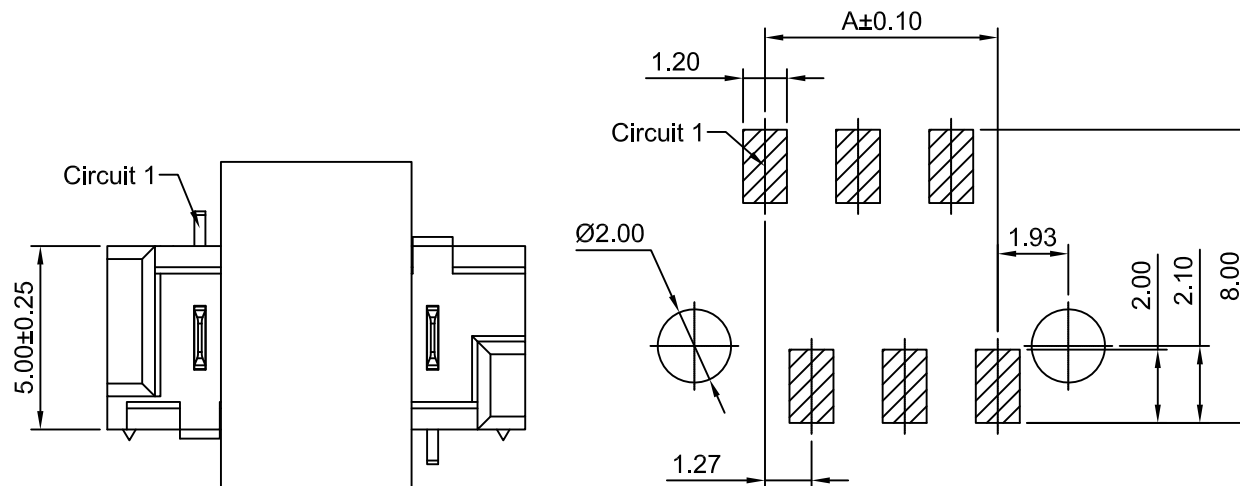


SPECIFICATIONS:

Current Rating: 1.2A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 500V AC/minute
Terminal Material: Copper Alloy/Tin over Nickel
Housing Material: LCP, UL94V-0

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
4P	3.81	8.86	16P	19.05	24.10
6P	6.35	11.40	18P	21.59	26.64
8P	8.89	13.94	20P	24.13	29.18
10P	11.43	16.48	22P	26.67	31.72
12P	13.97	19.02	24P	29.21	34.26
14P	16.51	21.56	26P	31.75	36.80

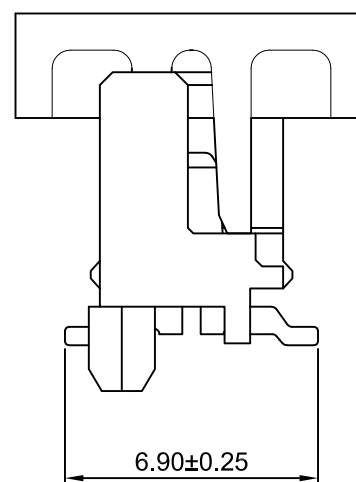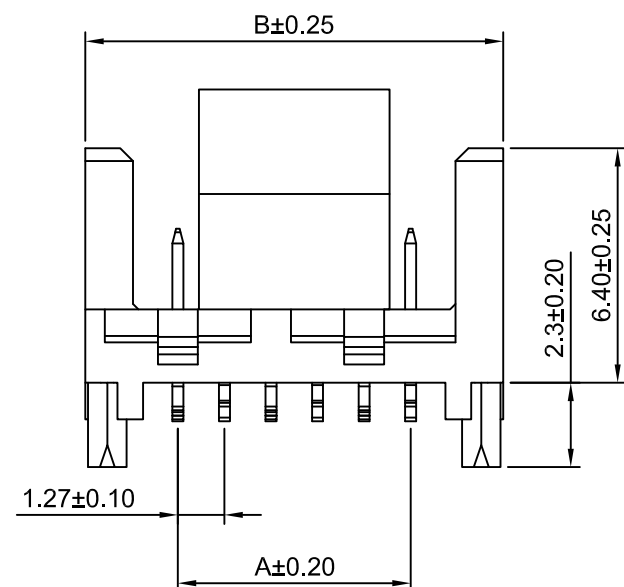

HDGC 深圳市华德共创科技有限公司
Shenzhen Huade co-create Technology Co., LTD
TEL : 0755-27129737 FAX : 0755-29940187

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表					TITLE: 1.27mm Pitch 产品名称: 180° Wafer			
X.X	±0.30	X.X° ±3°	APPD: 核准:	XIE	PART NO: HDGC1272WV-S-F-XP-2 产品编号:			
X.XX	±0.30	X.XX° ±2°	CHECK: 校对:	WANG	DATE	SCALE	UNIT	CODE NUMBER
X.XXX	±0.10	X.XXX° ±1°	DRAW: 绘图:	WANG	2017-01-10	1:1	mm	A008