
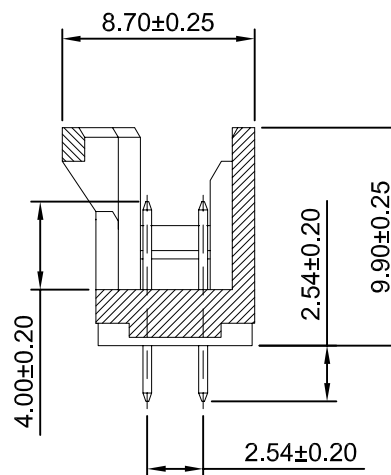
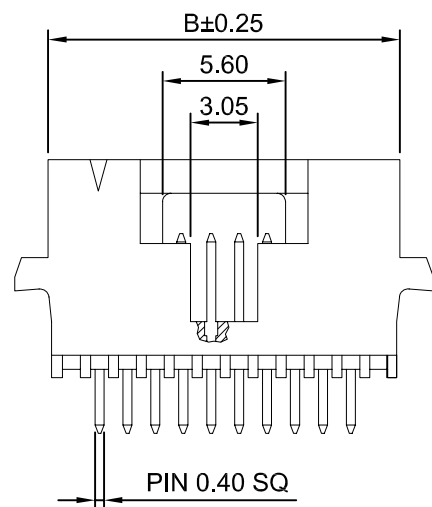
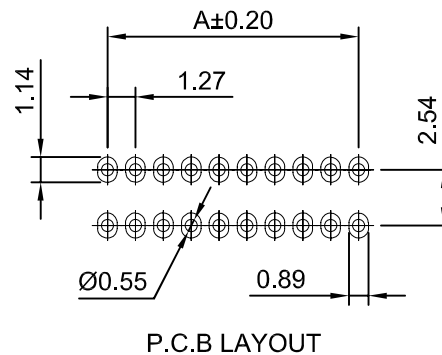


| 修订<br>REV | 标记<br>MARK | 修改摘要<br>REVISION DESCRIPTION | 签名<br>SIGNATURE | 日期<br>DATE |
|-----------|------------|------------------------------|-----------------|------------|
| A0        |            | NEW RELEASE                  | WANG            | 2017-03-25 |

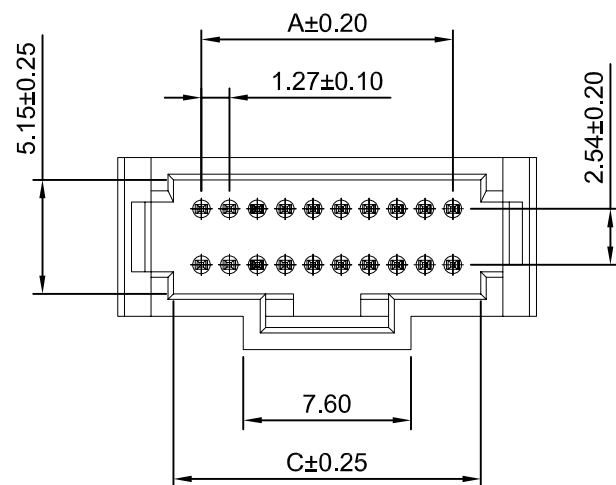

#### SPECIFICATIONS:

Current Rating:1.5A AC,DC  
Voltage Rating: 30V AC,DC  
Temperature Range: -25°C ~ +85°C  
Contact Resistance: 20mΩ Max  
Insulation Resistance: 1000MΩ Min  
Withstanding Voltage: 500V AC/minute  
Pin Material:Phosphor Bronze/Glod over Nickel  
Material: Nylon 9T,UL94V-0(Black)  
Soldering Temperature: 260°C±5°C  
Immersion Period: 3~5 seconds

#### Ordering Information & Dimensions

| Circuits | Dimensions(mm) |       |       | Circuits | Dimensions(mm) |       |       |
|----------|----------------|-------|-------|----------|----------------|-------|-------|
|          | A              | B     | C     |          | A              | B     | C     |
| 2x5P     | 5.08           | 9.65  | 7.65  | 2x21P    | 25.40          | 29.97 | 27.97 |
| 2x6P     | 6.35           | 10.92 | 8.92  | 2x22P    | 26.67          | 31.24 | 29.24 |
| 2x7P     | 7.62           | 12.19 | 10.19 | 2x23P    | 27.94          | 32.51 | 30.51 |
| 2x8P     | 8.89           | 13.46 | 11.46 | 2x24P    | 29.21          | 33.78 | 31.78 |
| 2x9P     | 10.16          | 14.73 | 12.73 | 2x25P    | 30.48          | 35.05 | 33.05 |
| 2x10P    | 11.43          | 16.00 | 14.00 | 2x26P    | 31.75          | 36.32 | 34.32 |
| 2x11P    | 12.70          | 17.27 | 15.27 | 2x27P    | 33.02          | 37.59 | 35.59 |
| 2x12P    | 13.97          | 18.54 | 16.54 | 2x28P    | 34.29          | 38.86 | 36.86 |
| 2x13P    | 15.24          | 19.81 | 17.81 | 2x29P    | 35.56          | 40.13 | 38.13 |
| 2x14P    | 16.51          | 21.08 | 19.08 | 2x30P    | 36.83          | 41.40 | 39.40 |
| 2x15P    | 17.78          | 22.35 | 20.35 | 2x31P    | 38.10          | 42.67 | 40.67 |
| 2x16P    | 19.05          | 23.62 | 21.62 | 2x32P    | 39.37          | 43.94 | 41.94 |
| 2x17P    | 20.32          | 24.89 | 22.89 | 2x33P    | 40.64          | 45.21 | 43.21 |
| 2x18P    | 21.59          | 26.16 | 24.16 | 2x34P    | 41.91          | 46.48 | 44.48 |
| 2x19P    | 22.86          | 27.43 | 25.43 | 2x35P    | 43.18          | 47.75 | 45.75 |
| 2x20P    | 24.13          | 28.70 | 26.70 | 2x36P    | 44.45          | 49.02 | 47.02 |



深圳市华德共创科技有限公司

Shenzhen Huade co-create Technology Co.,LTD

TEL : 0755-27129737 FAX : 0755-29940187

|                                                     |       |        |     |                                                                                       |      |                                         |       |      |             |
|-----------------------------------------------------|-------|--------|-----|---------------------------------------------------------------------------------------|------|-----------------------------------------|-------|------|-------------|
| -TOLERANCES-<br>UNLESS OTHERWISE SPECIFIED<br>公差参数表 |       |        |     |  |      | TITLE: 1.27mm Pitch<br>产品名称: 180° Wafer |       |      |             |
| X.X                                                 | ±0.30 | X.X°   | ±3° | APPD:<br>核准:                                                                          | XIE  | PART NO:<br>产品编号: HDGC1275WV-2xXP       |       |      |             |
| X.XX                                                | ±0.30 | X.XX°  | ±2° | CHECK:<br>校对:                                                                         | WANG | DATE                                    | SCALE | UNIT | CODE NUMBER |
| X.XXX                                               | ±0.10 | X.XXX° | ±1° | DRAW:<br>绘图:                                                                          | WANG | 2017-03-25                              | 3:1   | mm   | A008        |