
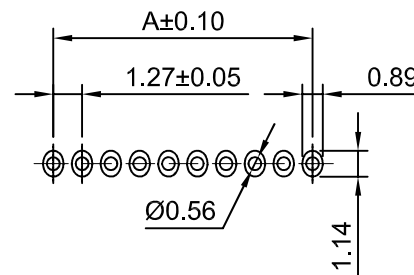




修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE
A0		NEW RELEASE	WANG	2017-03-25

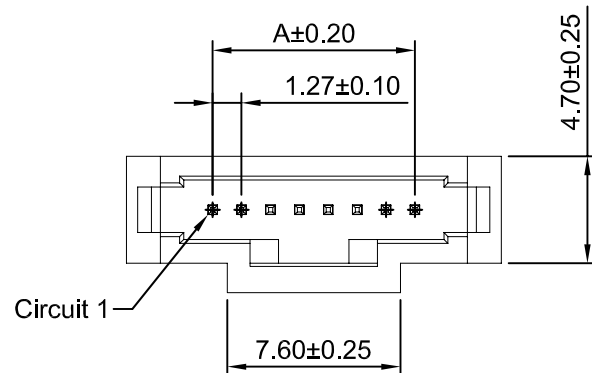

P.C.B LAYOUT

Ordering Information:
HDGC1275WV-XP - **
1 2

1.Part No.
2.Finish:
(Blank):Tin over Nickel
G:Gold over Nickel

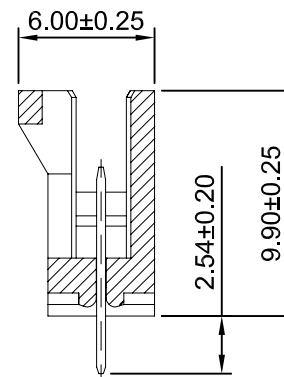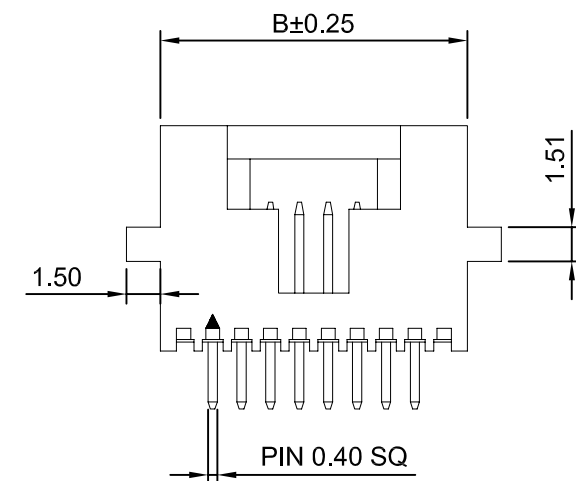

Ordering Information & Dimensions

Circuits	Dim(mm)		Circuits	Dim(mm)		Circuits	Dim(mm)	
	A	B		A	B		A	B
4P	3.81	8.41	20P	24.13	28.73	36P	44.45	49.05
5P	5.08	9.68	21P	25.40	30.00	37P	45.72	50.32
6P	6.35	10.95	22P	26.67	31.27	38P	46.99	51.59
7P	7.62	12.22	23P	27.94	32.54	39P	48.26	52.86
8P	8.89	13.49	24P	29.21	33.81	40P	49.53	54.13
9P	10.16	14.76	25P	30.48	35.08	41P	50.80	55.40
10P	11.43	16.03	26P	31.75	36.35	42P	52.07	56.67
11P	12.70	17.30	27P	33.02	37.62	43P	53.34	57.94
12P	13.97	18.57	28P	34.29	38.89	44P	54.61	59.21
13P	15.24	19.84	29P	35.56	40.16	45P	55.88	60.48
14P	16.51	21.11	30P	36.83	41.43	46P	57.15	61.75
15P	17.78	22.38	31P	38.10	42.70	47P	58.42	63.02
16P	19.05	23.65	32P	39.37	43.97	48P	59.69	64.29
17P	20.32	24.92	33P	40.64	45.24	49P	60.96	65.56
18P	21.59	26.19	34P	41.91	46.51	50P	62.23	66.83
19P	22.86	27.46	35P	43.18	47.78			

SPECIFICATIONS:

Current Rating:1.5A AC,DC
Voltage Rating: 30V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 500V AC/minute
Pin Material:Phosphor Bronze/Tin over Nickel
Material: PA9T+30%GF,UL94V-0(Black)



深圳市华德共创科技有限公司

Shenzhen Huade co-create Technology Co.,LTD

TEL : 0755-27129737 FAX : 0755-29940187

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表						TITLE: 1.27mm Pitch 产品名称: 180° Wafer			
X.X	±0.30	X.X°	±3°	APPD: 核准:	XIE	PART NO: HDGC1275WV-XP 产品编号:			
X.XX	±0.30	X.XX°	±2°	CHECK: 校对:	WANG	DATE	SCALE	UNIT	CODE NUMBER
X.XXX	±0.10	X.XXX°	±1°	DRAW: 绘图:	WANG	2017-03-25	3:1	mm	A008