

修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNA TURE	日期 DATE
A0		NEW RELEEASE	WANG	2017-11-20

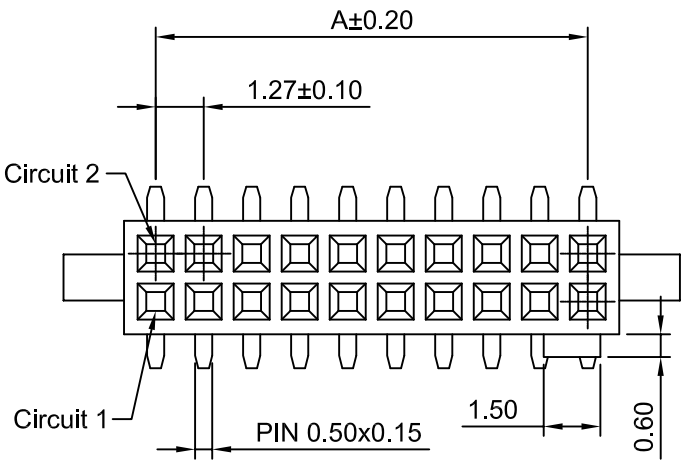

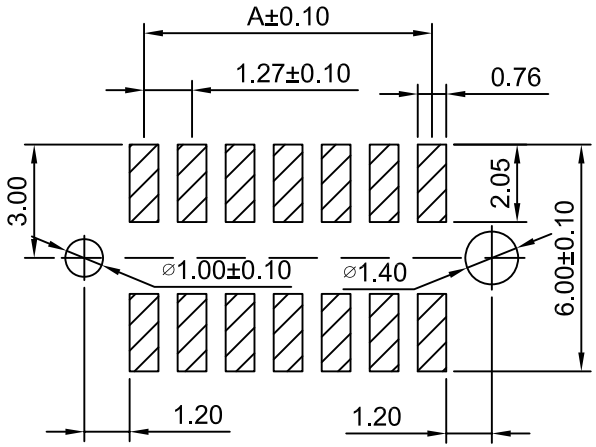

P.C.B LAYOUT

Ordering Information:

HDGC1276HWV-S-F1-2xXP - *** (1 / 2)

1.Part No.

2.Material:

(Blank):Nylon 6T,UL94V-0

GWT :Nylon 6T,UL94V-0 GWT 750℃

SPECIFICATIONS:

Current Rating: 1A AC,DC

Voltage Rating: 30V AC,DC

Temperature Range:-25°C ~ +85°C

Contact Resistance: 20mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 500V AC/minute

Pin Material:Phosphor Bronze/Gold over Nickel


Material: Nylon 6T ,UL94V-0(Black)


Ordering Information & Dimensions

Circuits	Dim(mm)	
	A	B
2x2P	1.27	2.94
2x3P	2.54	4.21
2x4P	3.81	5.48
2x5P	5.08	6.75
2x6P	6.35	8.02
2x7P	7.62	9.29
2x8P	8.89	10.56
2x9P	10.16	11.83
2x10P	11.43	13.10
2x11P	12.70	14.37
2x12P	13.97	15.64
2x13P	15.24	16.91
2x14P	16.51	18.18

Circuits	Dim(mm)	
	A	B
2x15P	17.78	19.45
2x16P	19.05	20.72
2x17P	20.32	21.99
2x18P	21.59	23.26
2x19P	22.86	24.53
2x20P	24.13	25.90
2x21P	25.40	27.07
2x22P	26.67	28.34
2x23P	27.94	29.61
2x24P	29.21	30.88
2x25P	30.48	32.15
2x26P	31.75	33.42
2x27P	33.02	34.69

Circuits	Dim(mm)	
	A	B
2x28P	34.29	35.96
2x29P	35.56	37.23
2x30P	36.83	38.50
2x31P	38.10	39.77
2x32P	39.37	41.04
2x33P	40.64	42.31
2x34P	41.91	43.58
2x35P	43.18	44.85
2x36P	44.45	46.12
2x37P	45.72	47.39
2x38P	46.99	48.66
2x39P	48.26	49.93
2x40P	49.53	51.20

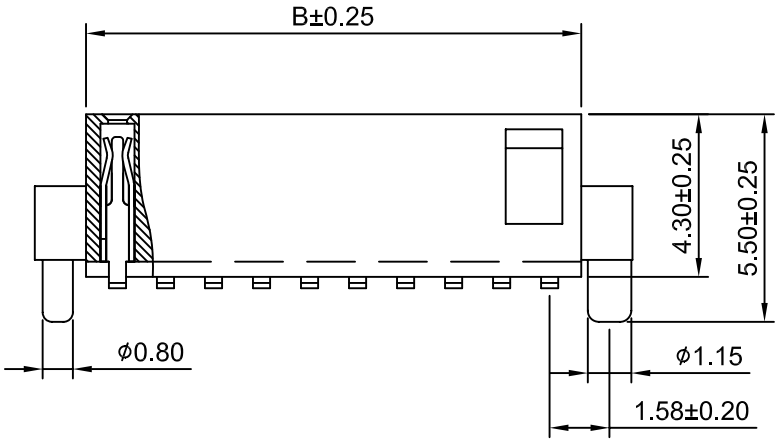

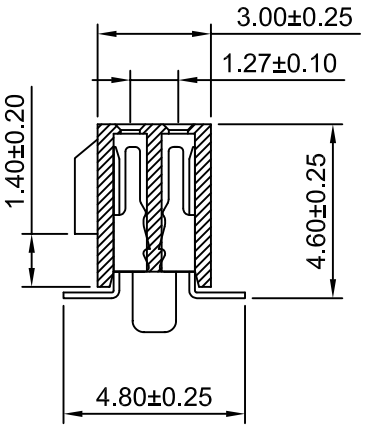

深圳市华德共创科技有限公司

Shenzhen Huade co-create Technology Co.,LTD

TEL：0755-27129737 FAX：0755-29940187

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表						TITLE: 产品名称：	1.27mm Pitch 180 ° Box Header		
X.X	±0.30	X.X°	±3°	APPD: 核准：	XIE	PART NO: 产品编号：	HDGC1276HWV-S-F1-2xXP		
X.XX	±0.30	X.XX°	±2°	CHECK: 校对：	WANG	DATE	SCALE	UNIT	CODE NUMBER
X.XXX	±0.10	X.XXX°	±1°	DRAW: 绘图：	WANG	2017-11-20	5:1	mm	A008