



修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNA TURE	日期 DATE
A0		NEW RELEEASE	WANG	2014-07-25

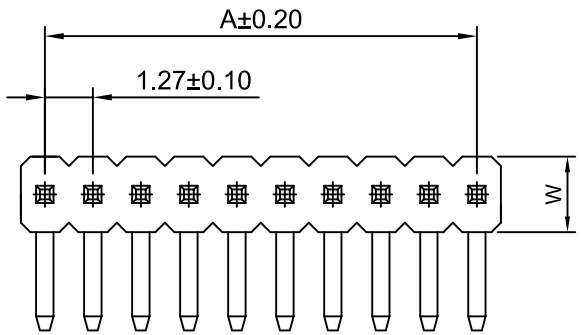

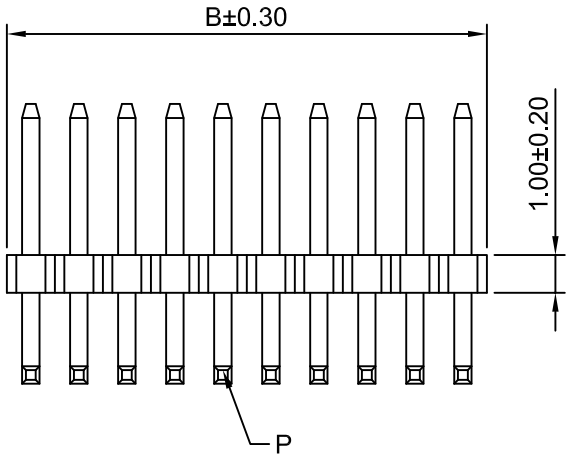

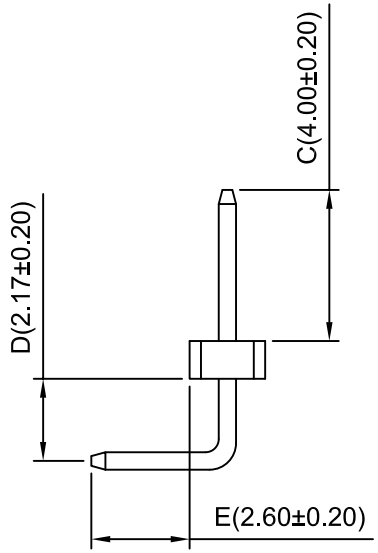

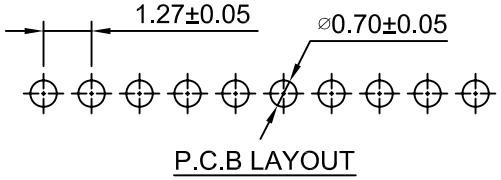

Ordering Information:

HDGC1276WR-XP - *** - ***
1 2 3

1.Part No.
2.Size(H):
(Blank):1.00mm(W:2.00mm,P:Pin 0.40SQ)
H15:1.50mm(W:2.40mm,P:Pin 0.40SQ)
H17:1.70mm(W:2.40mm,P:Pin 0.46SQ)
H20:2.00mm(W:2.50mm,P:Pin 0.40SQ)
H25:2.50mm(W:2.50mm,P:Pin 0.40SQ)
3.Material:
(Blank):Nylon 6T,UL94V-0
GWT :Nylon 6T,UL94V-0 GWT 750℃

SPECIFICATIONS:

Current Rating:1A AC,DC
Voltage Rating: 30V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 500V AC/minute
Pin Material:Brass/Gold over Nickel
Material: Nylon 6T,UL94V-0(Black)

Ordering Information & Dimensions

Circuits	Dim(mm)		Circuits	Dim(mm)		Circuits	Dim(mm)	
	A	B		A	B		A	B
1P	----	1.27	18P	21.59	22.86	35P	43.18	44.46
2P	1.27	2.54	19P	22.86	24.13	36P	44.45	45.72
3P	2.54	3.81	20P	24.13	25.40	37P	45.72	46.99
4P	3.81	5.08	21P	25.40	26.67	38P	46.99	48.26
5P	5.08	6.35	22P	26.67	27.94	39P	48.26	49.53
6P	6.35	7.62	23P	27.94	29.21	40P	49.53	50.80
7P	7.62	8.89	24P	29.21	30.48	41P	50.80	52.07
8P	8.89	10.16	25P	30.48	31.75	42P	52.07	53.34
9P	10.16	11.43	26P	31.75	33.02	43P	53.34	54.61
10P	11.43	12.70	27P	33.02	34.29	44P	54.61	55.88
11P	12.70	13.97	28P	34.29	35.56	45P	55.88	57.15
12P	13.97	15.24	29P	35.56	36.83	46P	57.15	58.42
13P	15.24	16.51	30P	36.83	38.10	47P	58.42	59.69
14P	16.51	17.78	31P	38.10	39.37	48P	59.69	60.96
15P	17.78	19.05	32P	39.37	40.64	49P	60.96	62.23
16P	19.05	20.32	33P	40.64	41.91	50P	62.23	63.50
17P	20.32	21.59	34P	41.91	43.18			

深圳市华德共创科技有限公司
Shenzhen Huade co-create Technology Co.,LTD
TEL：0755-27129737 FAX：0755-29940187

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表						TITLE: 产品名称：	1.27mm Pitch 90° Wafer		
X.X	±0.30	X.X°	±3°	APPD: 核准：	XIE	PART NO: 产品编号：	HDGC1276WR-XP		
X.XX	±0.30	X.XX°	±2°	CHECK: 校对：	WANG	DATE	SCALE	UNIT	CODE NUMBER
X.XXX	±0.10	X.XXX°	±1°	DRAW: 绘图：	WANG	2014-07-25	5:1	mm	A008