
| 修订 REV | 标记 MARK | 修改摘要 REVISION DESCRIPTION | 签名 SIGNA TURE | 日期 DATE |
|---|---|---|---|---|
| A0 | | NEW RELEEASE | WANG | 2017-10-25 |
| | | | | |

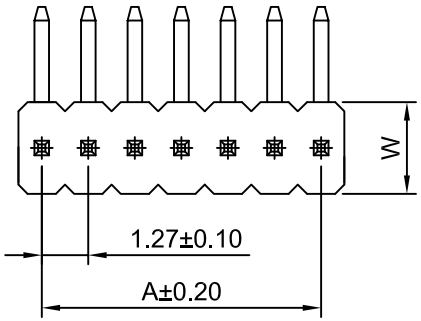


Ordering Information:

HDGC1276WRA-XP - *** - ***
1 2 3


1.Part No.
2.Size(H):
(Blank):1.00mm(W:2.10mm,P:Pin 0.40 SQ )
H15:1.50mm(W:2.40mm,P:Pin 0.40 SQ )
H17:1.70mm(W:2.50mm,P:Pin 0.46 SQ )
H20:2.00mm(W:2.50mm,P:Pin 0.40 SQ )
H25:2.50mm(W:2.50mm,P:Pin 0.40 SQ )
3.Material:
(Blank):Nylon 6T,UL94V-0
GWT :Nylon 6T,UL94V-0 GWT 750℃


## SPECIFICATIONS:


Current Rating:1A AC,DC
Voltage Rating: 30V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 500V AC/minute
Pin Material:Brass/Gold over Nickel
Material: Nylon 6T,UL94V-0(Black)

Ordering Information & Dimensions

| Circuits | Dim(mm) | | Circuits | Dim(mm) | | Circuits | Dim(mm) | |
|---|---|---|---|---|---|---|---|---|
| | A | B | | A | B | | A | B |
| 1P | ---- | 1.27 | 18P | 21.59 | 22.86 | 35P | 43.18 | 44.46 |
| 2P | 1.27 | 2.54 | 19P | 22.86 | 24.13 | 36P | 44.45 | 45.72 |
| 3P | 2.54 | 3.81 | 20P | 24.13 | 25.40 | 37P | 45.72 | 46.99 |
| 4P | 3.81 | 5.08 | 21P | 25.40 | 26.67 | 38P | 46.99 | 48.26 |
| 5P | 5.08 | 6.35 | 22P | 26.67 | 27.94 | 39P | 48.26 | 49.53 |
| 6P | 6.35 | 7.62 | 23P | 27.94 | 29.21 | 40P | 49.53 | 50.80 |
| 7P | 7.62 | 8.89 | 24P | 29.21 | 30.48 | 41P | 50.80 | 52.07 |
| 8P | 8.89 | 10.16 | 25P | 30.48 | 31.75 | 42P | 52.07 | 53.34 |
| 9P | 10.16 | 11.43 | 26P | 31.75 | 33.02 | 43P | 53.34 | 54.61 |
| 10P | 11.43 | 12.70 | 27P | 33.02 | 34.29 | 44P | 54.61 | 55.88 |
| 11P | 12.70 | 13.97 | 28P | 34.29 | 35.56 | 45P | 55.88 | 57.15 |
| 12P | 13.97 | 15.24 | 29P | 35.56 | 36.83 | 46P | 57.15 | 58.42 |
| 13P | 15.24 | 16.51 | 30P | 36.83 | 38.10 | 47P | 58.42 | 59.69 |
| 14P | 16.51 | 17.78 | 31P | 38.10 | 39.37 | 48P | 59.69 | 60.96 |
| 15P | 17.78 | 19.05 | 32P | 39.37 | 40.64 | 49P | 60.96 | 62.23 |
| 16P | 19.05 | 20.32 | 33P | 40.64 | 41.91 | 50P | 62.23 | 63.50 |
| 17P | 20.32 | 21.59 | 34P | 41.91 | 43.18 | | | |

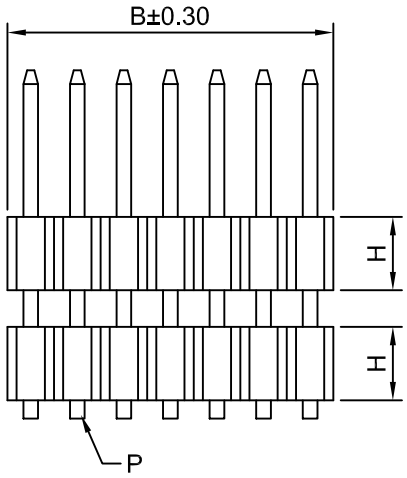

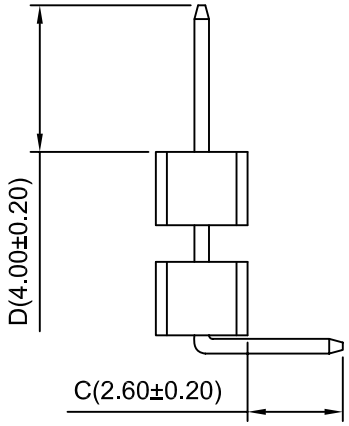
P.C.B LAYOUT


深圳市华德共创科技有限公司
Shenzhen Huade co-create Technology Co.,LTD
TEL：0755-27129737 FAX：0755-29940187


| -TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表 | | | | | | TITLE: 产品名称： | 1.27mm Pitch 90 ° Wafer | | |
|---|---|---|---|---|---|---|---|---|---|
| X.X | ±0.30 | X.X° | ±3° | APPD: 核准： | XIE | PART NO: 产品编号： | HDGC1276WRA-XP | | |
| X.XX | ±0.30 | X.XX° | ±2° | CHECK: 校对： | WANG | DATE | SCALE | UNIT | CODE NUMBER |
| X.XXX | ±0.10 | X.XXX° | ±1° | DRAW: 绘图： | WANG | 2017-10-25 | 5:1 | mm | A008 |