


修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE
A0		NEW RELEASE	WANG	2014-09-17

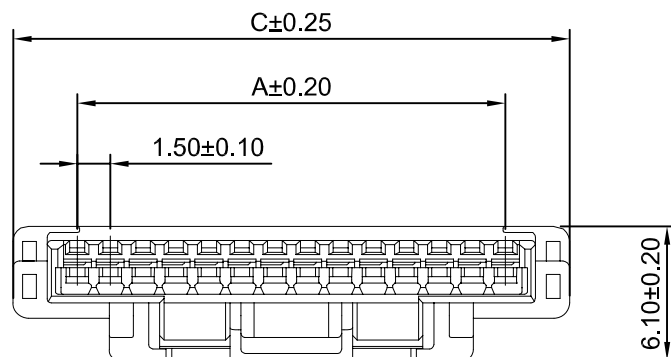

Ordering Information:




HDGC1501HA-XP - ***
1 2

1.Part No.

2.Material:


(blank):PBT,UL94V-0

GWT:Nylon 66,UL94V-0,GWT 750°C

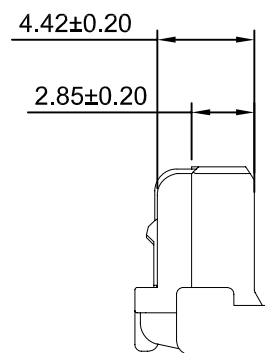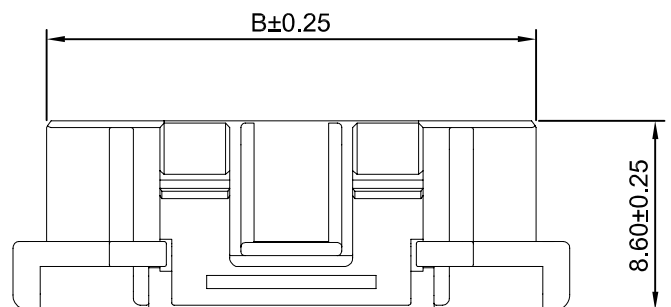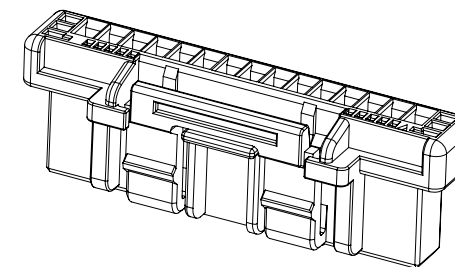


Ordering Information & Dimensions


Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2P	1.50	4.25	7.30	9P	12.00	14.75	17.80
3P	3.00	5.75	8.80	10P	13.50	16.25	19.30
4P	4.50	7.25	10.30	11P	15.00	17.75	20.80
5P	6.00	8.75	11.80	12P	16.50	19.25	22.30
6P	7.50	10.25	13.30	13P	18.00	20.75	23.80
7P	9.00	11.75	14.80	14P	19.50	22.25	25.30
8P	10.50	13.25	16.30	15P	21.00	23.75	26.80



2P,3P



4P,5P



6P~15P

SPECIFICATIONS:

Current Rating: 2A AC,DC

Voltage Rating: 100V AC,DC

Temperature Range: -25°C ~ +85°C

Contact Resistance: 20mΩ Max.

Insulation Resistance: 500MΩ Min.

Withstanding Voltage: 500V AC/minute

Material: PBT,UL94V-0(Beige)



深圳市华德共创科技有限公司

Shenzhen Huade co-create Technology Co.,LTD

TEL : 0755-27129737

FAX : 0755-29940187

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表				TITLE: 产品名称: 1.50mm Pitch Housing	
X.X	±0.30	X.X°	±3°	APPD: 核准:	XIE
X.XX	±0.30	X.XX°	±2°	CHECK: 校对:	WANG
X.XXX	±0.10	X.XXX°	±1°	DRAW: 绘图:	WANG
				PART NO: 产品编号:	HDGC1501HA-XP
				DATE	SCALE
				UNIT	CODE NUMBER
				2014-09-17	3:1 mm A008