
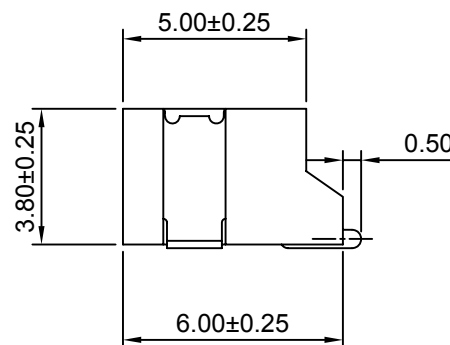
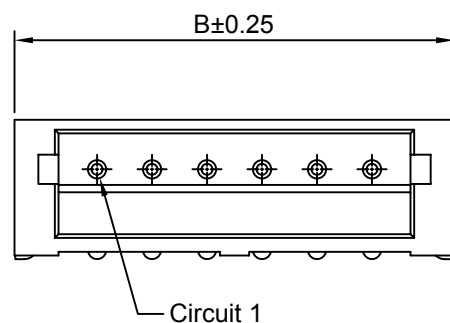
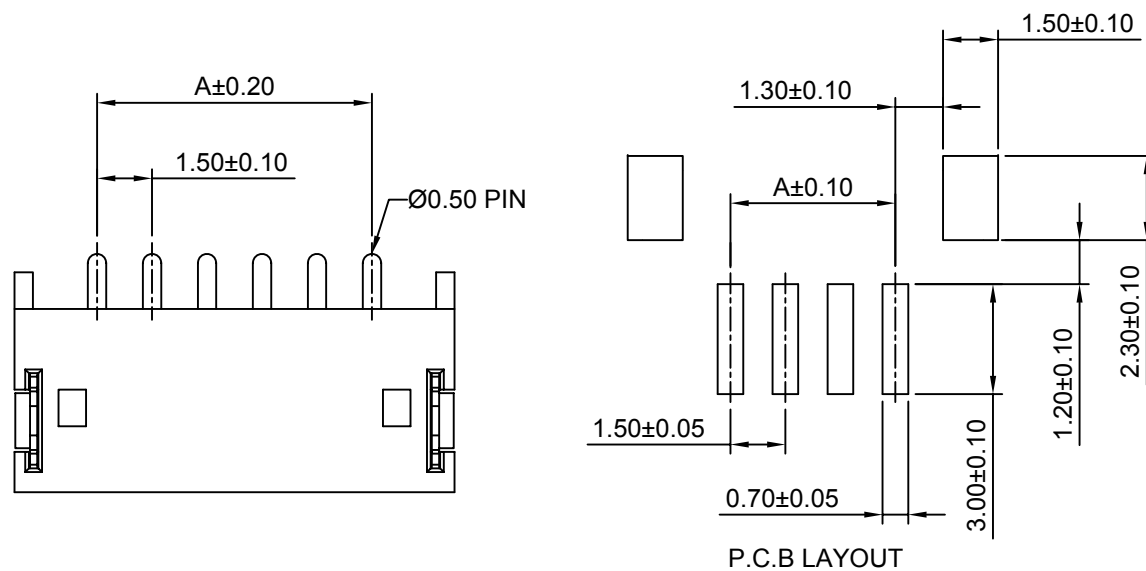


修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE
A0		NEW RELEASE	WANG	2014-09-17

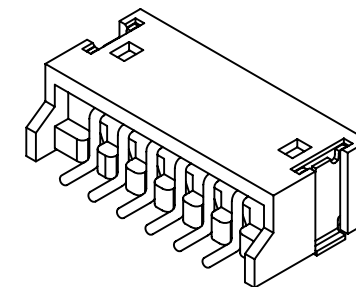


Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	1.50	6.00	8P	10.50	15.00
3P	3.00	7.50	9P	12.00	16.50
4P	4.50	9.00	10P	13.50	18.00
5P	6.00	10.50	11P	15.00	19.50
6P	7.50	12.00	12P	16.50	21.00
7P	9.00	13.50	13P	18.00	22.50

SPECIFICATIONS:

Current Rating: 1A AC,DC
 Voltage Rating: 100V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 20mΩ Max.
 Insulation Resistance: 500MΩ Min.
 Withstanding Voltage: 500V AC/minute
 Pin Material: Brass/Gold over Nickel
 Solder Tabs: Brass/Gold over Nickel
 Material: Nylon 6T,UL94V-0(Ivory)

		深圳市华德共创科技有限公司 Shenzhen Huade co-create Technology Co.,LTD TEL : 0755-27129737 FAX : 0755-29940187								
-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表					TITLE: 1.50mm Pitch 产品名称: 90° Wafer					
X.X	±0.30	X.X°	±3°	APPD: 核准:	XIE		PART NO: 产品编号:		HDGC1501WR-S-XP	
X.XX	±0.30	X.XX°	±2°	CHECK: 校对:	WANG		DATE	SCALE	UNIT	CODE NUMBER
X.XXX	±0.10	X.XXX°	±1°	DRAW: 绘图:	WANG		2014-09-17	5:1	mm	A008