




修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE
A0		NEW RELEASE	WANG	2014-09-17

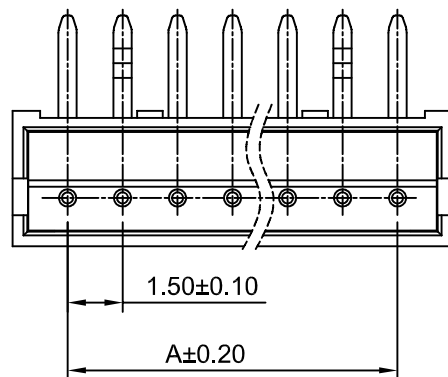


7~13P

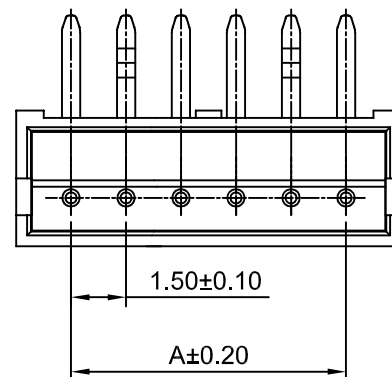




3~6P

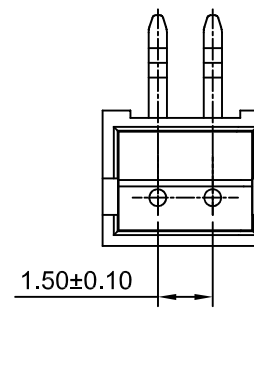

2P



P.C.B LAYOUT

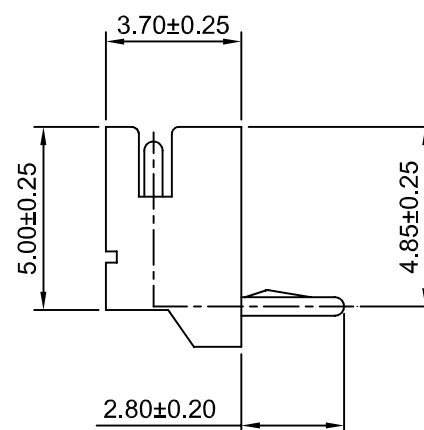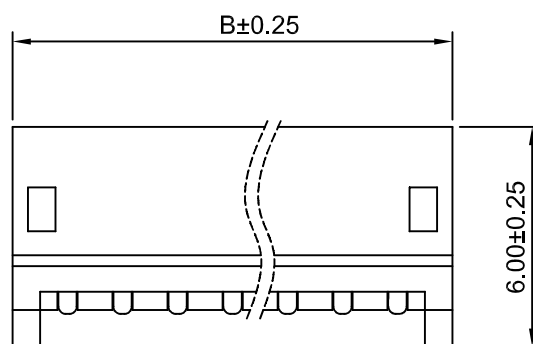

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	1.50	4.50	8P	10.50	13.50
3P	3.00	6.00	9P	12.00	15.00
4P	4.50	7.50	10P	13.50	16.50
5P	6.00	9.00	11P	15.00	18.00
6P	7.50	10.50	12P	16.50	19.50
7P	9.00	12.00	13P	18.00	21.00

SPECIFICATIONS:

Current Rating: 1A AC,DC
Voltage Rating: 100V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 20mΩ Max.
Insulation Resistance: 500MΩ Min.
Withstanding Voltage: 500V AC/minute
Pin Material: Brass/Tin over Nickel
Material: Nylon 66,UL94V-0(Ivory)

深圳市华德共创科技有限公司

Shenzhen Huade co-create Technology Co.,LTD

TEL : 0755-27129737 FAX : 0755-29940187

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表					TITLE: 1.50mm Pitch 90° Wafer		
X.X	±0.30	X.X°	±3°	APPD: 核准: XIE	PART NO: HDGC1501WR-XP		
X.XX	±0.30	X.XX°	±2°	CHECK: 校对: WANG	DATE	SCALE	UNIT
X.XXX	±0.10	X.XXX°	±1°	DRAW: 绘图: WANG	2014-09-17	5:1	mm
						CODE NUMBER	A008