

A

B

C



D

E


F

修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE
A0		NEW RELEASE	WANG	2014-09-17



Circuit 1
PIN Ø0.50

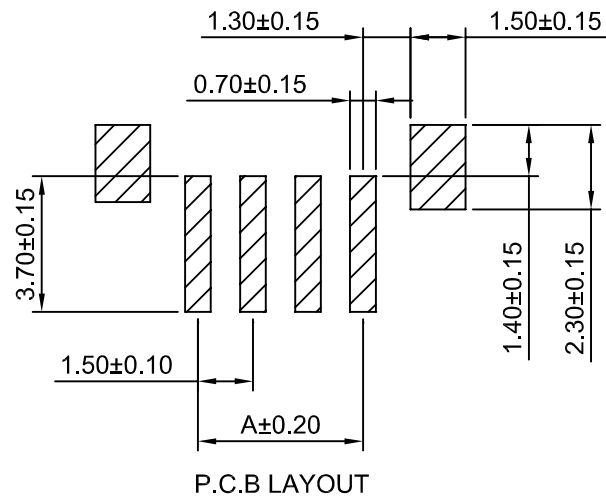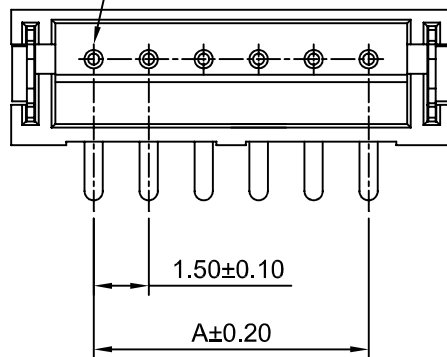

P.C.B LAYOUT



B±0.25

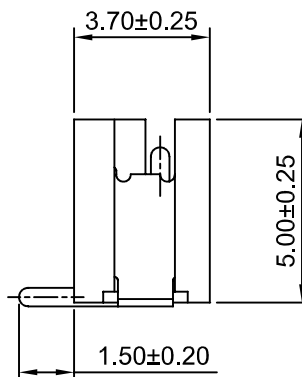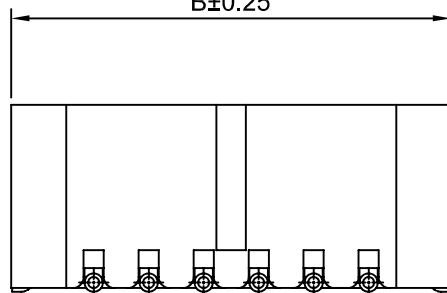

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	1.50	6.00	10P	13.50	18.00
3P	3.00	7.50	11P	15.00	19.50
4P	4.50	9.00	12P	16.50	21.00
5P	6.00	10.50	13P	18.00	22.50
6P	7.50	12.00	14P	19.50	24.00
7P	9.00	13.50	15P	21.00	25.50
8P	10.50	15.00	16P	22.50	27.00
9P	12.00	16.50			

SPECIFICATIONS:

Current Rating: 1A AC,DC

Voltage Rating: 100V AC,DC

Temperature Range: -25°C ~ +85°C

Contact Resistance: 20mΩ Max.

Insulation Resistance: 500MΩ Min.

Withstanding Voltage: 500V AC/minute

Pin Material: Brass/Tin over Nickel

Solder Tabs: Phosphor Bronze/Tin over Nickel

Wafer: Nylon 6T,UL94V-0(Ivory)



深圳市华德共创科技有限公司

Shenzhen Huade co-create Technology Co.,LTD

TEL : 0755-27129737 FAX : 0755-29940187

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表						TITLE: 1.50mm Pitch 产品名称: 180° Wafer			
X.X	±0.30	X.X°	±3°	APPD: 核准: XIE	PART NO: HDGC1501WV-S-XP 产品编号:				
X.XX	±0.30	X.XX°	±2°	CHECK: 校对: WANG	DATE	SCALE	UNIT	CODE NUMBER	
X.XXX	±0.10	X.XXX°	±1°	DRAW: 绘图: WANG	2014-09-17	5:1	mm	A008	