




修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE
A0		NEW RELEASE	WANG	2014-09-17

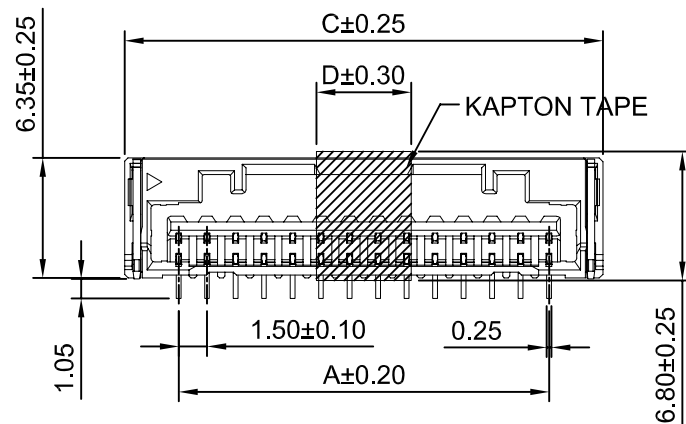


8P~15P
KAPTON TAPE FIGURE

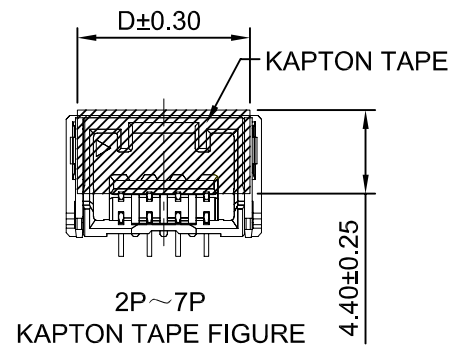


2P~7P
KAPTON TAPE FIGURE

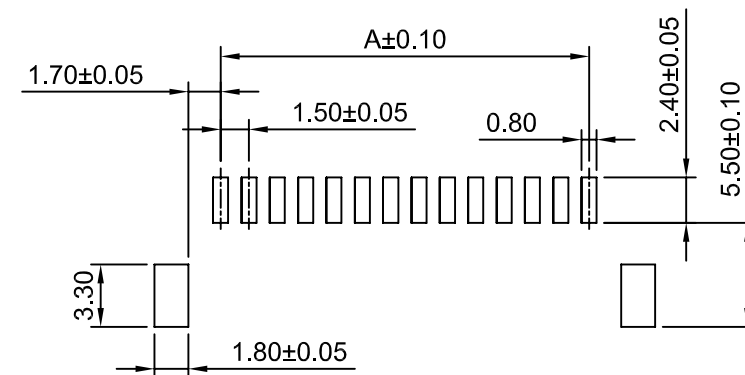

P.C.B LAYOUT

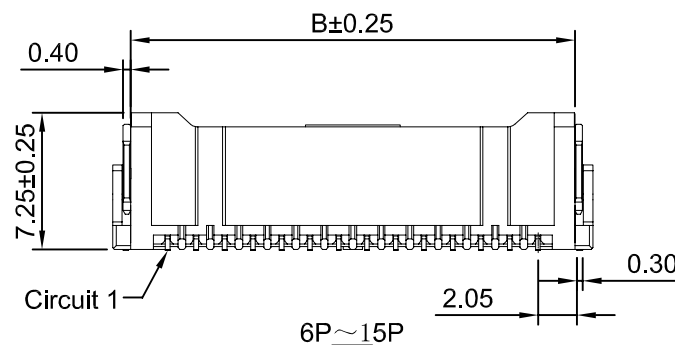

6P~15P

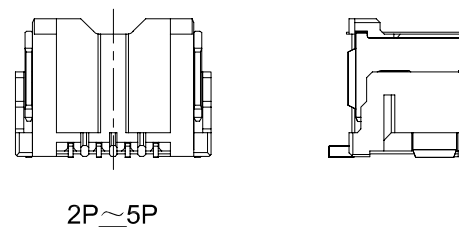

2P~5P

Ordering Information & Dimensions

Circuits	Dimensions(mm)				Circuits	Dimensions(mm)			
	A	B	C	D		A	B	C	D
2P	1.50	5.50	7.30	6.10	9P	12.00	16.00	17.80	5.00
3P	3.00	7.00	8.80	7.60	10P	13.50	17.50	19.30	5.00
4P	4.50	8.50	10.30	9.10	11P	15.00	19.00	20.80	5.00
5P	6.00	10.00	11.80	10.60	12P	16.50	20.50	22.30	5.00
6P	7.50	11.50	13.30	12.10	13P	18.00	22.00	23.80	5.00
7P	9.00	13.00	14.80	13.60	14P	19.50	23.50	25.30	5.00
8P	10.50	14.50	16.30	5.00	15P	21.00	25.00	26.80	5.00

SPECIFICATIONS:

Current Rating: 1A AC,DC
Voltage Rating: 100V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 20mΩ Max.
Insulation Resistance: 500MΩ Min.
Withstanding Voltage: 500V AC/minute
Pin Material: Phosphor Bronze/Tin over Nickel
Solder Tabs Material: Brass/Tin over Nickel
Wafer Material: LCP,UL94V-0(Ivory)



深圳市华德共创科技有限公司

Shenzhen Huade co-create Technology Co.,LTD

TEL : 0755-27129737 FAX : 0755-29940187

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表					TITLE: 1.50mm Pitch 产品名称: 180 ° Wafer			
X.X	±0.30	X.X° ±3°	APPD: 核准:	XIE	PART NO: 产品编号: HDGC1501WVA-S-XP			
X.XX	±0.30	X.XX° ±2°	CHECK: 校对:	WANG	DATE	SCALE	UNIT	CODE NUMBER
X.XXX	±0.10	X.XXX° ±1°	DRAW: 绘图:	WANG	2014-09-17	2.5:1	mm	A008