

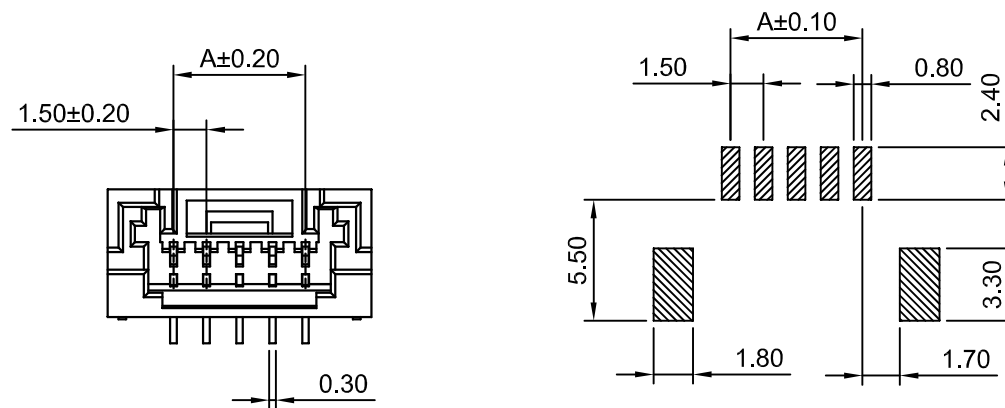
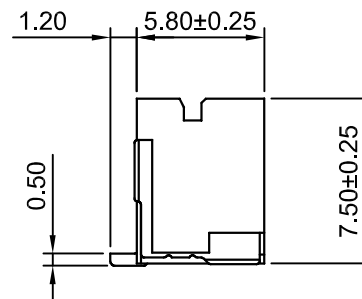


修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE
A0		NEW RELEASE	WANG	2014-09-17



P.C.B LAYOUT



Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	1.50	7.50	10P	13.50	19.50
3P	3.00	9.00	11P	15.00	21.00
4P	4.50	10.50	12P	16.50	22.50
5P	6.00	12.00	13P	18.00	24.00
6P	7.50	13.50	14P	19.50	25.50
7P	9.00	15.00	15P	21.00	27.00
8P	10.50	16.50	16P	22.50	28.50
9P	12.00	18.00			

SPECIFICATIONS:

Current Rating: 2A AC,DC (AWG #24)
Voltage Rating: 100V AC,DC
Temperature Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
Contact Resistance: $20\text{m}\Omega$ Max.
Insulation Resistance: $500\text{M}\Omega$ Min.
Withstanding Voltage: 500V AC/minute
Pin Material: Phosphor Bronze/Tin over Nickel
Wafer Material: LCP,UL94V-0(Beige)

		深圳市华德共创科技有限公司			
		Shenzhen Huade co-create Technology Co.,LTD			
		TEL : 0755-27129737 FAX : 0755-29940187			
-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表			TITLE: 1.50mm Pitch 产品名称: 180° Wafer		
X.X	± 0.30	X.X°	$\pm 3^{\circ}$	APPD: 核准:	XIE
X.XX	± 0.30	X.XX°	$\pm 2^{\circ}$	CHECK: 校对:	WANG
X.XXX	± 0.10	X.XXX°	$\pm 1^{\circ}$	DRAW: 绘图:	WANG
		DATE	SCALE	UNIT	CODE NUMBER
		2014-09-17	3:1	mm	A008