
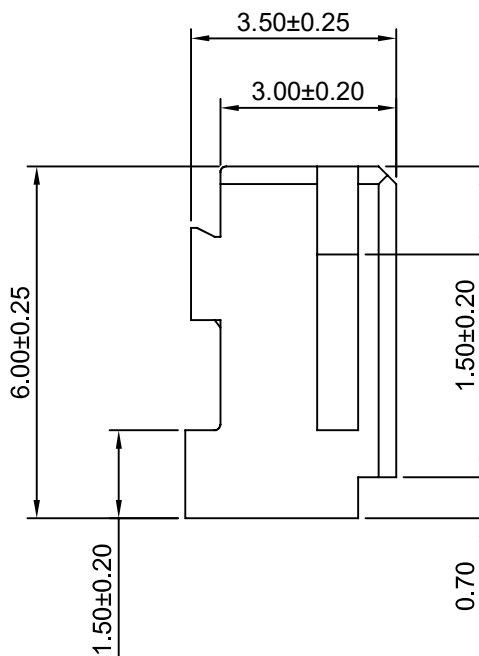
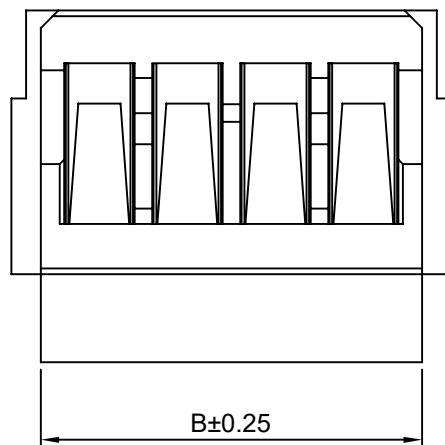


修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE
A0		NEW RELEASE	WANG	2012-10-23

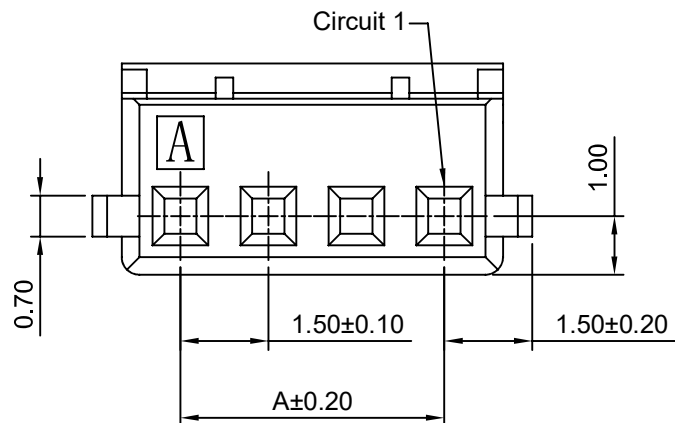

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	1.50	3.50	12P	16.50	18.50
3P	3.00	5.00	13P	18.00	20.00
4P	4.50	6.50	14P	19.50	21.50
5P	6.00	8.00	15P	21.00	23.00
6P	7.50	9.50	16P	22.50	24.50
7P	9.00	11.00	17P	24.00	26.00
8P	10.50	12.50	18P	25.50	27.50
9P	12.00	14.00	19P	27.00	29.00
10P	13.50	15.50	20P	28.50	30.50
11P	15.00	17.00			

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 350V AC,DC

Temperature Range: -25°C ~ +85°C

Contact Resistance: 20mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 500V AC/minute

Material: Nylon 66,UL94V-0(White)



深圳市华德共创科技有限公司

Shenzhen Huade co-create Technology Co.,LTD

TEL : 0755-27129737

FAX : 0755-29940187

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表					TITLE: 产品名称：1.50mm Pitch Housing				
X.X	±0.30	X.X°	±3°	APPD: 核准:	XIE	PART NO: 产品编号：HDGC1502HA-XP			
X.XX	±0.30	X.XX°	±2°	CHECK: 校对:	WANG	DATE	SCALE	UNIT	CODE NUMBER
X.XXX	±0.10	X.XXX°	±1°	DRAW: 绘图:	WANG	2012-10-23	8:1	mm	A008