
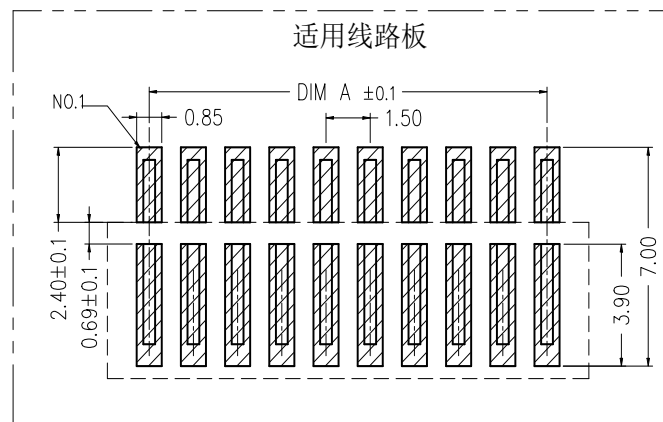





修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE
A0		NEW RELEASE	WANG	2012-10-23

序号	品名	材质
①	胶芯带扣	PA6T UL94V-0 米白色 LCP UL94V-0 本色
②	端子	黄铜/表面镀雾锡

CKT	DIM A	DIM B	DIM C
2	1.50	3.35	4.46
3	3.00	4.85	5.96
4	4.50	6.35	7.46
5	6.00	7.85	8.96
6	7.50	9.35	10.46
7	9.00	10.85	11.96
8	10.50	12.35	13.46
9	12.00	13.85	14.96
10	13.50	15.35	16.46
11	15.00	16.85	17.96
12	16.50	18.35	19.46
13	18.00	19.85	20.96
14	19.50	21.35	22.46
15	21.00	22.85	23.96
16	22.50	24.35	25.46

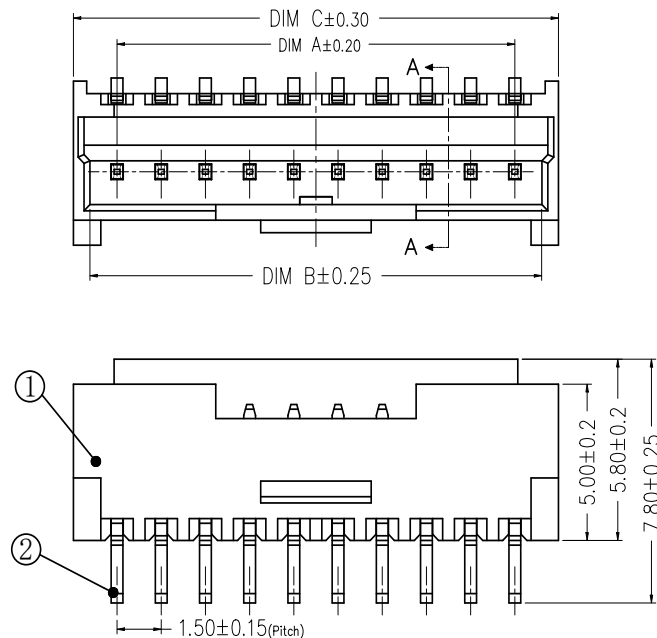

技术指标:

- 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象.
- 温度范围: $-25^{\circ}\text{C} \sim 85^{\circ}\text{C}$.
- 额定电压: 350V, AC/DC.
- 接触电阻: $\leq 0.02\Omega$.
- 绝缘电阻: $\geq 1000M\Omega$.
- 额定电流: 3A, AC/DC.



深圳市华德共创科技有限公司

Shenzhen Huade co-create Technology Co.,LTD

TEL : 0755-27129737

FAX : 0755-29940187

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表				TITLE: 产品名称:		1.50mm Pitch 90° Wafer			
X.X	±0.30	X.X°	±3°	APPD: 核准:	XIE	PART NO: 产品编号:			
X.XX	±0.30	X.XX°	±2°	CHECK: 校对:	WANG	DATE	SCALE	UNIT	CODE NUMBER
X.XXX	±0.10	X.XXX°	±1°	DRAW: 绘图:	WANG	2012-10-23	6:1	mm	A003