
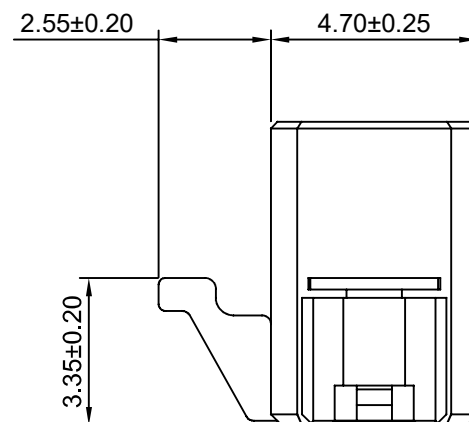
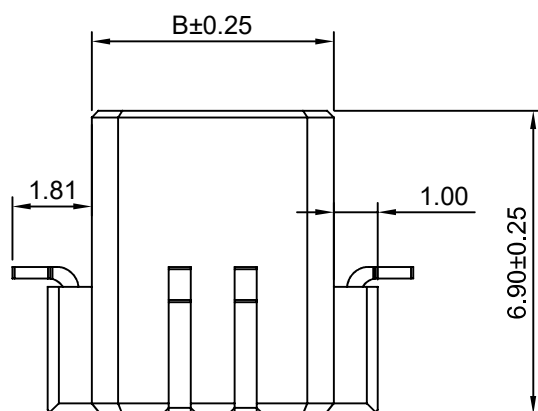
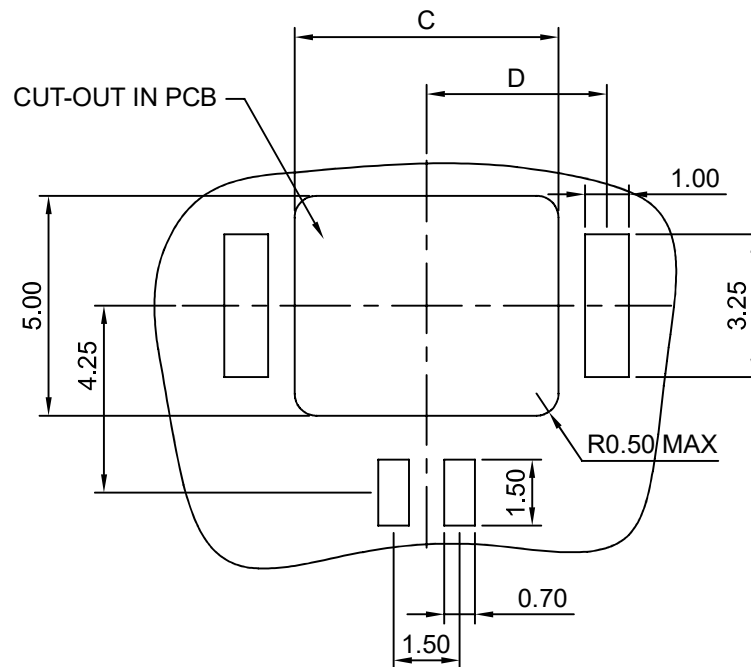


| 修订<br>REV | 标记<br>MARK | 修改摘要<br>REVISION DESCRIPTION | 签名<br>SIGNATURE | 日期<br>DATE |
|-----------|------------|------------------------------|-----------------|------------|
| A0        |            | NEW RELEASE                  | WANG            | 2013-10-20 |
|           |            |                              |                 |            |

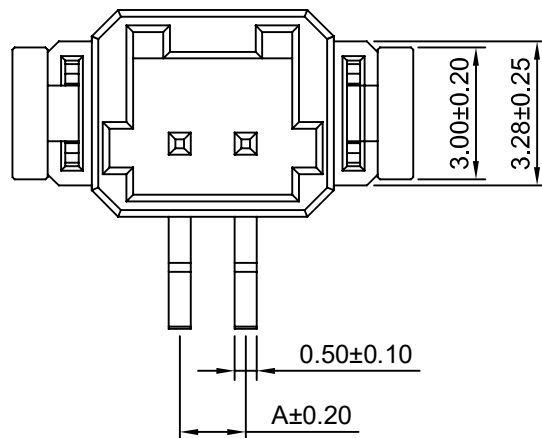

Ordering Information & Dimensions

| Circuits | Dimensions(mm) |      |      |      | Circuits | Dimensions(mm) |       |       |      |
|----------|----------------|------|------|------|----------|----------------|-------|-------|------|
|          | A              | B    | C    | D    |          | A              | B     | C     | D    |
| 2P       | 1.50           | 5.50 | 6.00 | 4.10 | 5P       | 6.00           | 10.00 | 10.50 | 6.35 |
| 3P       | 3.00           | 7.00 | 7.50 | 4.85 | 6P       | 7.50           | 11.50 | 12.00 | 7.10 |
| 4P       | 4.50           | 8.50 | 9.00 | 5.60 |          |                |       |       |      |

# SPECIFICATIONS:

Current Rating: 3A AC,DC  
Voltage Rating: 70V AC,DC  
Temperature Range: -25°C ~ +85°C  
Contact Resistance: 20mΩ Max.  
Insulation Resistance: 500MΩ Min.  
Withstanding Voltage: 500V AC/minute  
Pin Material: Brass/Tin-plated  
Solder Tabs: Brass/Tin-plated  
Material: LCP,UL94V-0(Natural)

深圳市华德共创科技有限公司

Shenzhen Huade co-create Technology Co.,LTD

TEL : 0755-27129737 FAX : 0755-29940187

|                                                     |       |        |     |                                                 |                                               |                                      |                                |      |             |
|-----------------------------------------------------|-------|--------|-----|-------------------------------------------------|-----------------------------------------------|--------------------------------------|--------------------------------|------|-------------|
| -TOLERANCES-<br>UNLESS OTHERWISE SPECIFIED<br>公差参数表 |       |        |     | <div> <div>TITLE:</div> <div>产品名称:</div> </div> | <div>1.50mm Pitch</div> <div>180° Wafer</div> |                                      |                                |      |             |
| X.X                                                 | ±0.30 | X.X°   | ±3° | <div>APPD:</div> <div>核准:</div>                 | XIE                                           | <div>PART NO:</div> <div>产品编号:</div> | <div>HDGC1502WVA-IT-S-XP</div> |      |             |
| X.XX                                                | ±0.30 | X.XX°  | ±2° | <div>CHECK:</div> <div>校对:</div>                | WANG                                          | DATE                                 | SCALE                          | UNIT | CODE NUMBER |
| X.XXX                                               | ±0.10 | X.XXX° | ±1° | <div>DRAW:</div> <div>绘图:</div>                 | WANG                                          | 2013-10-20                           | 6:1                            | mm   | A008        |