


A B C D E F

修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE
A0		NEW RELEASE	WANG	2023-10-25

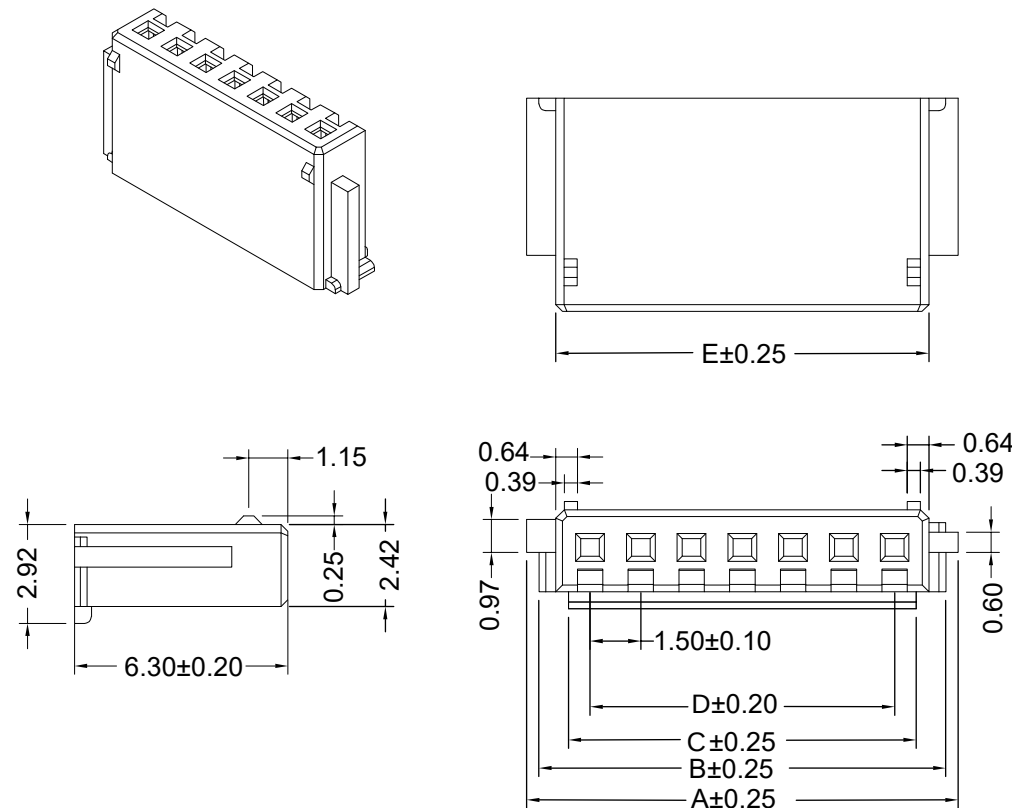

Ordering Information & Dimensions

Circuits	Dimensions(mm)				
	A	B	C	D	E
2P	5.25	4.52	3.00	1.50	3.52
3P	6.75	6.02	4.50	3.00	5.02
4P	8.25	7.52	6.00	4.50	6.52
5P	9.75	9.02	7.50	6.00	8.02
6P	11.25	10.52	9.00	7.50	9.52
7P	12.75	12.02	10.50	9.00	11.02
8P	14.25	13.52	12.00	10.50	12.52
9P	15.75	15.02	13.50	12.00	14.02
10P	17.25	16.52	15.00	13.50	15.52
11P	18.75	18.02	16.50	15.00	17.02
12P	20.25	19.52	18.00	16.50	18.52
13P	21.75	21.02	19.50	18.00	20.02
14P	23.25	22.52	21.00	19.50	21.52
15P	24.75	24.02	22.50	21.00	23.02

SPECIFICATIONS:

Current Rating: 2A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -25°C~+85°C

Contact Resistance: 20mΩ Max.

Insulation Resistance: 500MΩ Min.

Withstanding Voltage: 500V AC/minute

Material: PA66 , UL94V-0(Natural)



深圳市华德共创科技有限公司

Shenzhen Huade co-create Technology Co.,LTD

TEL : 0755-27129737 FAX : 0755-29940187

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表						TITLE: 产品名称： 1.50mm Pitch Housing			
X.X	±0.30	X.X°	±3°	APPD: 核准：	XIE	PART NO: 产品编号： HDGC1508H-XP			
X.XX	±0.30	X.XX°	±2°	CHECK: 校对：	WANG	DATE	SCALE	UNIT	CODE NUMBER
X.XXX	±0.10	X.XXX°	±1°	DRAW: 绘图：	WANG	2023-10-25	1:1	mm	A001