
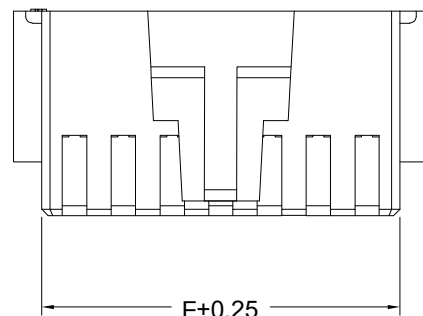
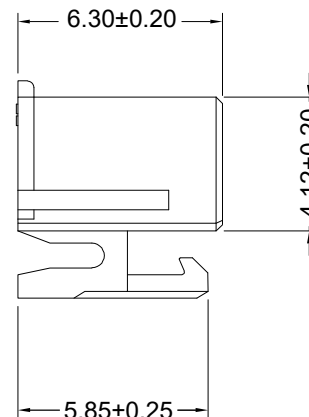


修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE
A0		NEW RELEASE	WANG	2023-10-25

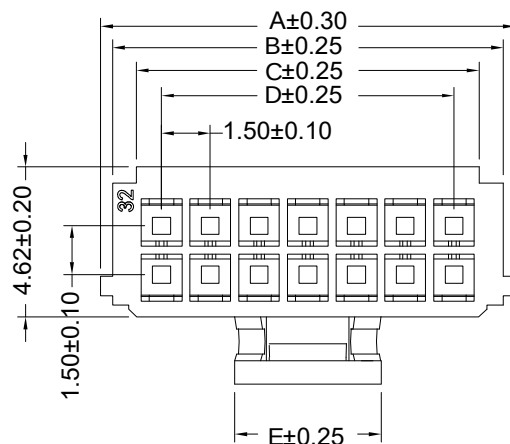

Ordering Information & Dimensions

Circuits	Dimensions(mm)					
	A	B	C	D	E	F
2x2P	5.25	4.52	3.00	1.50	2.50	3.52
2x3P	6.75	6.02	4.50	3.00	3.00	5.02
2x4P	8.25	7.52	6.00	4.50	4.50	6.52
2x5P	9.75	9.02	7.50	6.00	4.50	8.02
2x6P	11.25	10.52	9.00	7.50	4.50	9.52
2x7P	12.75	12.02	10.50	9.00	4.50	11.02
2x8P	14.25	13.52	12.00	10.50	4.50	12.52
2x9P	15.75	15.02	13.50	12.00	10.50	14.02
2x10P	17.25	16.52	15.00	13.50	10.50	15.52
2x11P	18.75	18.02	16.50	15.00	10.50	17.02
2x12P	20.25	19.52	18.00	16.50	10.50	18.52
2x13P	21.75	21.02	19.50	18.00	10.50	20.02
2x14P	23.25	22.52	21.00	19.50	10.50	21.52
2x15P	24.75	24.02	22.50	21.00	10.50	23.02
2x16P	26.25	25.52	24.00	22.50	10.50	24.52
2x17P	27.75	27.02	25.50	24.00	10.50	26.02
2x18P	29.25	28.52	27.00	25.50	10.50	27.52
2x19P	30.75	30.02	28.50	27.00	10.50	29.02
2x20P	32.25	31.52	30.00	28.50	10.50	30.52

SPECIFICATIONS:

Current Rating: 2A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -25°C~+85°C

Contact Resistance: 20mΩ Max.

Insulation Resistance: 500MΩ Min.

Withstanding Voltage: 500V AC/minute

Material: PA66 , UL94V-0(Natural)



深圳市华德共创科技有限公司

Shenzhen Huade co-create Technology Co.,LTD

TEL : 0755-27129737 FAX : 0755-29940187

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表						TITLE: 产品名称： 1.50mm Pitch Housing			
X.X	±0.30	X.X°	±3°	APPD: 核准：	XIE	PART NO: 产品编号： HDGC1508HA-2xXP			
X.XX	±0.30	X.XX°	±2°	CHECK: 校对：	WANG	DATE	SCALE	UNIT	CODE NUMBER
X.XXX	±0.10	X.XXX°	±1°	DRAW: 绘图：	WANG	2023-10-25	1:1	mm	A001