

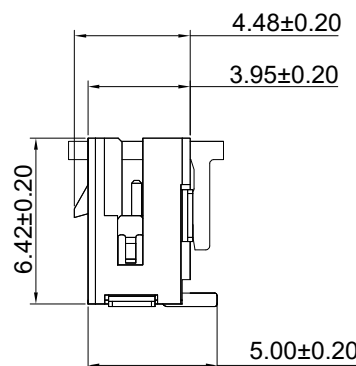
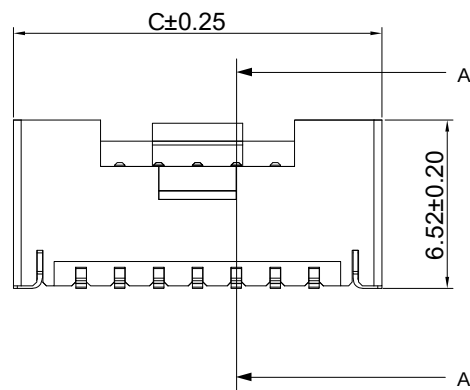
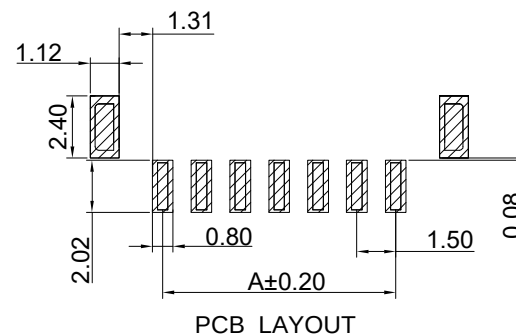


修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE
A0		NEW RELEASE	WANG	2023-09-25

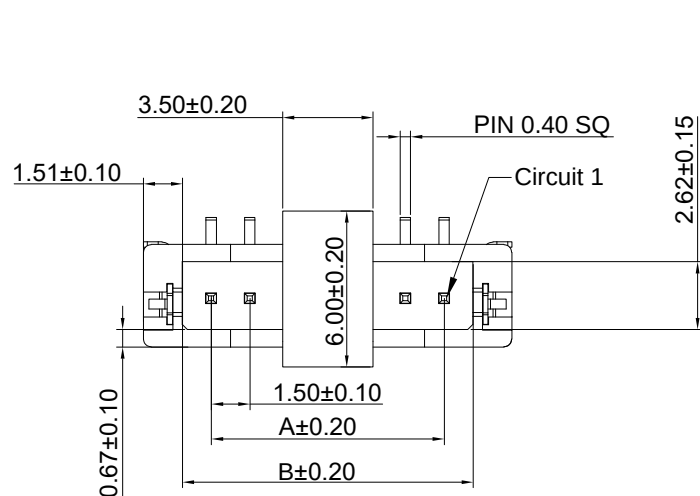

Ordering Information & Dimensions

Circuits	Dimensions(mm)		
	A	B	C
2P	1.50	3.72	6.74
3P	3.00	5.22	8.24
4P	4.50	6.72	9.74
5P	6.00	8.22	11.24
6P	7.50	9.72	12.74
7P	9.00	11.22	14.24
8P	10.50	12.72	15.74
9P	12.00	14.22	17.24
10P	13.50	15.72	18.74
11P	15.00	17.22	20.24
12P	16.50	18.72	21.74
13P	18.00	20.22	23.24
14P	19.50	21.72	24.74
15P	21.00	23.22	26.24

SPECIFICATIONS:

Current Rating: 2A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 20mΩ Max.
Insulation Resistance: 500MΩ Min.
Withstanding Voltage: 500V AC/minute
Pin Material: Brass/Tin over Nickel
Solder Tabs: Brass/Tin over Nickel
Material: LCP,UL94V-0(Beige)

		深圳市华德共创科技有限公司			
		Shenzhen Huade co-create Technology Co.,LTD			
		TEL : 0755-27129737 FAX : 0755-29940187			
-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表				TITLE: 1.50mm Pitch	
X.X ±0.30 X.X° ±3°		APPD: 核准: XIE		PART NO: 产品名称: 180° Wafer	
X.XX ±0.30 X.XX° ±2°		CHECK: 校对: WANG		PART NO: 产品编号: HDGC1508WVA-S-XP	
X.XXX ±0.10 X.XXX° ±1°		DRAW: 绘图: WANG		DATE	SCALE
		2023-09-25		UNIT	CODE NUMBER
		1:1		mm	A001