
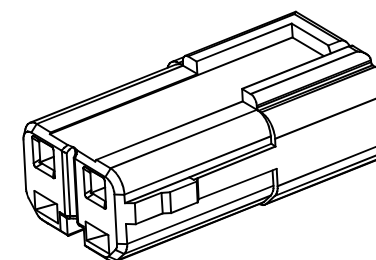
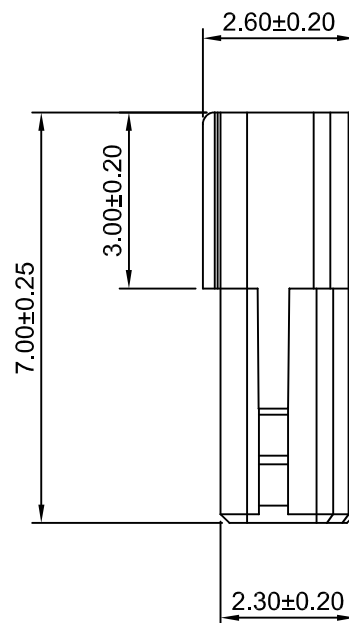
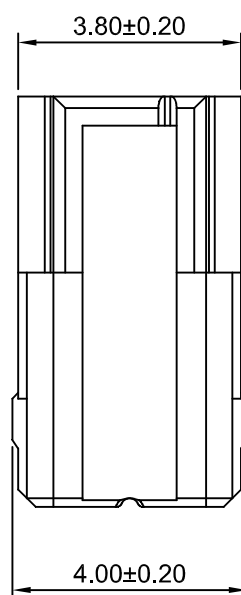



修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE
A0		NEW RELEASE	WANG	2015-05-10



SPECIFICATIONS:

Current Rating: 3.2A AC,DC

Voltage Rating:350V AC,DC


Temperature Range: -25°C ~ +85°C

Contact Resistance: 10mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 1700V AC/minute

Material: Nylon 66,UL94V-0 (White)

				深圳市华德共创科技有限公司 Shenzhen Huade co-create Technology Co.,LTD TEL : 0755-27129737 FAX : 0755-29940187							
-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表						TITLE: 产品名称：1.80mm Pitch Housing					
X.X	±0.30	X.X°	±3°	APPD: 核准： XIE		PART NO:		产品编号： HDGC1801H-2P			
X.XX	±0.30	X.XX°	±2°	CHECK: 校对： WANG		DATE	SCALE	UNIT	CODE NUMBER		
X.XXX	±0.10	X.XXX°	±1°	DRAW: 绘图： WANG		2015-05-10	8:1	mm	A008		