
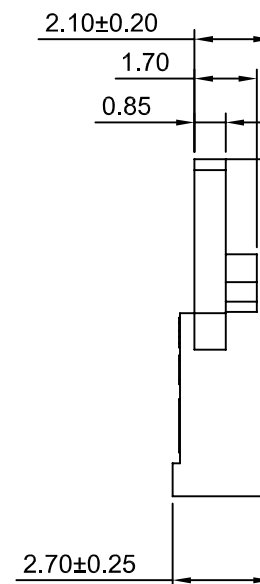
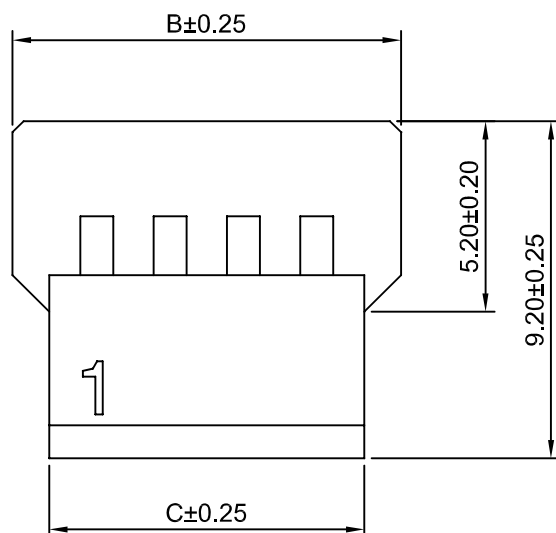
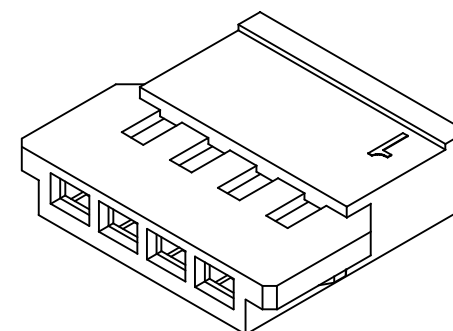


修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE
A0		NEW RELEASE	WANG	2012-12-10

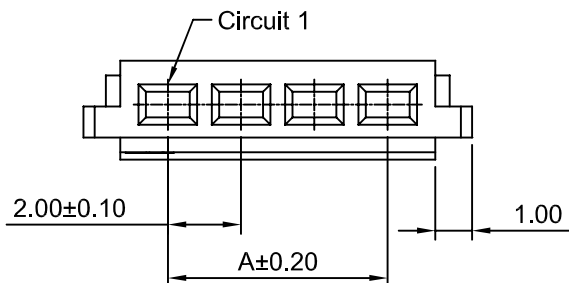

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2P	2.00	6.60	4.60	8P	14.00	18.60	16.60
3P	4.00	8.60	6.60	9P	16.00	20.60	18.60
4P	6.00	10.60	8.60	10P	18.00	22.60	20.60
5P	8.00	12.60	10.60	11P	20.00	24.60	22.60
6P	10.00	14.60	12.60	12P	22.00	26.60	24.60
7P	12.00	16.60	14.60	13P	24.00	28.60	26.60

SPECIFICATIONS:

Current Rating: 2A AC,DC

Voltage Rating: 125V AC,DC

Temperature Range: -25°C~+85°C

Contact Resistance: 20mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 500V AC/minute

Material: Nylon 66,UL94V-0(White)



深圳市华德共创科技有限公司

Shenzhen Huade co-create Technology Co.,LTD

TEL : 0755-27129737 FAX : 0755-29940187

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表				TITLE: 产品名称: 2.00mm Pitch Housing	
X.X	±0.30	X.X°	±3°	APPD: 核准:	XIE
X.XX	±0.30	X.XX°	±2°	CHECK: 校对:	WANG
X.XXX	±0.10	X.XXX°	±1°	DRAW: 绘图:	WANG
				PART NO: 产品编号:	HDGC2003HF-XP
				DATE	SCALE
				UNIT	CODE NUMBER
				2012-12-10	5:1 mm A008