

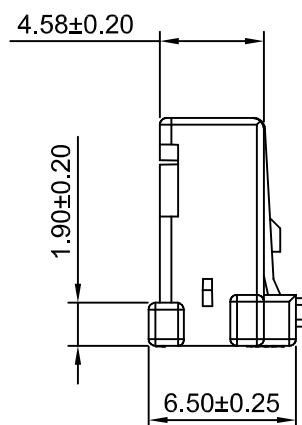
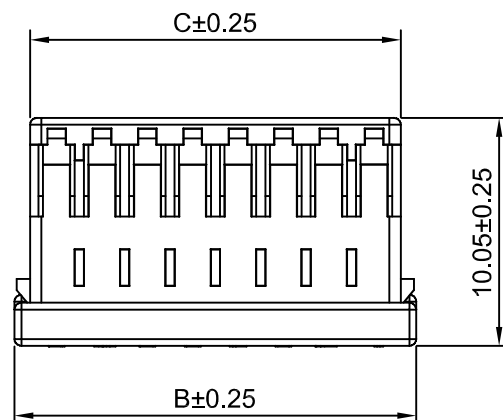
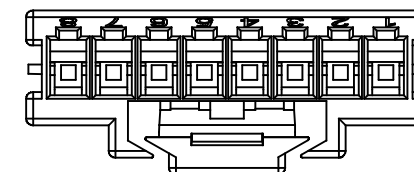





修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE
A0		NEW RELEASE	WANG	2012-12-10

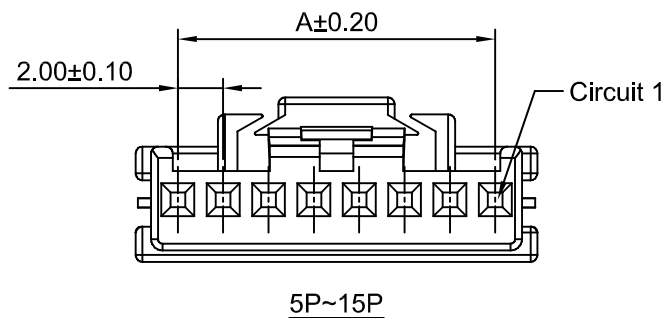

Ordering Information & Dimensions

Circuits	Dimensions(mm)		
	A	B	C
2P	2.00	5.71	4.35
3P	4.00	7.71	6.35
4P	6.00	9.71	8.35
5P	8.00	11.71	10.35
6P	10.00	13.71	12.35
8P	14.00	17.71	16.35
10P	18.00	21.71	20.35
12P	22.00	25.71	24.35
14P	26.00	29.71	28.35
15P	28.00	31.71	30.35

SPECIFICATIONS:

Current Rating: 3A AC,DC (AWG #22)

Voltage Rating: 100V AC,DC

Temperature Range: -25°C~+85°C

Contact Resistance: 15mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 800V AC/minute

Material: PBT, UL94V-0 (White)

深圳市华德共创科技有限公司

Shenzhen Huade co-create Technology Co.,LTD

TEL : 0755-27129737 FAX : 0755-29940187

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表						TITLE: 产品名称: 2.00mm Pitch Housing			
X.X	±0.30	X.X°	±3°	APPD: 核准:	XIE	PART NO: 产品编号: HDGC2003HFB-XP			
X.XX	±0.30	X.XX°	±2°	CHECK: 校对:	WANG	DATE	SCALE	UNIT	CODE NUMBER
X.XXX	±0.10	X.XXX°	±1°	DRAW: 绘图:	WANG	2012-12-10	3:1	mm	A008