
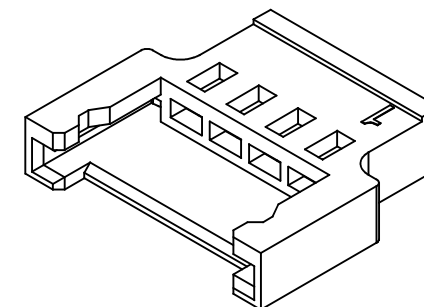
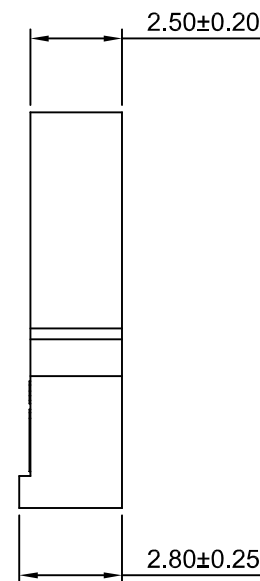
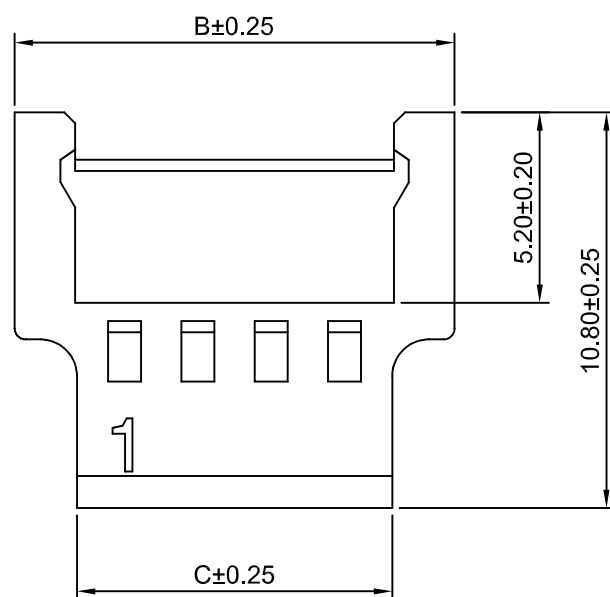



修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE
A0		NEW RELEASE	WANG	2012-12-10

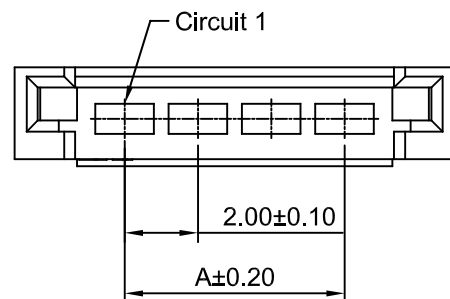

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2P	2.00	8.00	4.60	8P	14.00	20.00	16.60
3P	4.00	10.00	6.60	9P	16.00	22.00	18.60
4P	6.00	12.00	8.60	10P	18.00	24.00	20.60
5P	8.00	14.00	10.60	11P	20.00	26.00	22.60
6P	10.00	16.00	12.60	12P	22.00	28.00	24.60
7P	12.00	18.00	14.60	13P	24.00	30.00	26.60

SPECIFICATIONS:
Current Rating: 2A AC,DC
Voltage Rating: 125V AC,DC
Temperature Range: -25°C~+85°C
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 500V AC/minute
Material: Nylon 66,UL94V-0(White)

		深圳市华德共创科技有限公司							
Shenzhen Huade co-create Technology Co.,LTD						TEL : 0755-27129737		FAX : 0755-29940187	
-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表					TITLE: 产品名称：2.00mm Pitch Housing				
X.X	±0.30	X.X°	±3°	APPD: 核准：	XIE				
X.XX	±0.30	X.XX°	±2°	CHECK: 校对：	DATE		SCALE	UNIT	CODE NUMBER
X.XXX	±0.10	X.XXX°	±1°	DRAW: 绘图：	2012-12-10		5:1	mm	A008