

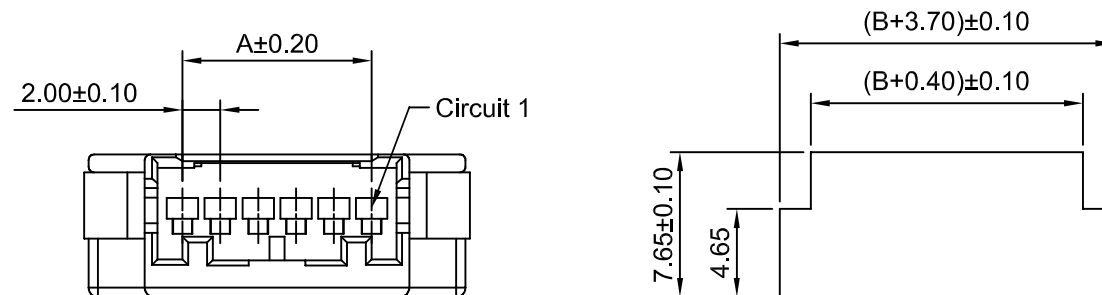
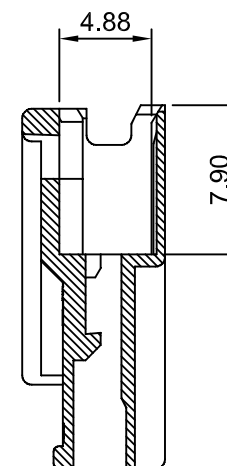


修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE
A0		NEW RELEASE	WANG	2012-12-10

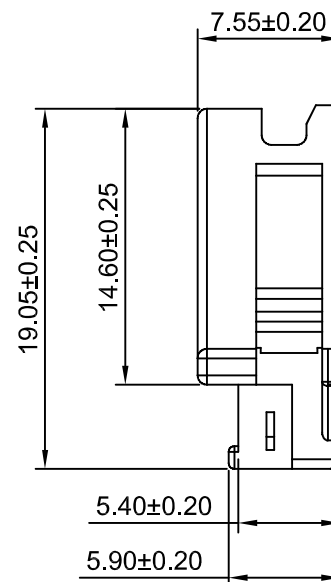

PANEL HOLE LAYOUT
TOLERANCE:±0.05

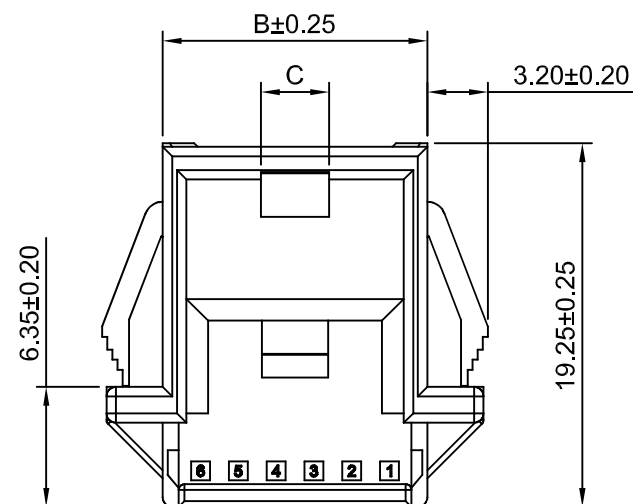

Ordering Information & Dimensions

Circuits	Dimensions(mm)		
	A	B	C
2P	2.00	6.00	1.50
3P	4.00	8.00	2.06
4P	6.00	10.00	3.06
5P	8.00	12.00	3.06
6P	10.00	14.00	3.06
8P	14.00	18.00	3.06
10P	18.00	22.00	3.06
12P	22.00	26.00	3.06
14P	26.00	30.00	3.06
15P	28.00	32.00	3.06

SPECIFICATIONS:

Current Rating: 3A AC,DC (AWG #22)

Voltage Rating: 100V AC,DC

Temperature Range: -25°C~+85°C

Contact Resistance: 15mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 800V AC/minute

Material: Nylon66, UL94V-0 (White)



深圳市华德共创科技有限公司

Shenzhen Huade co-create Technology Co.,LTD

TEL : 0755-27129737 FAX : 0755-29940187

-TOLERANCES- OTHERWISE SPECIFIED 公差参数表						TITLE: 产品名称: 2.00mm Pitch Housing			
X.X	±0.30	X.X°	±3°	APPD: 核准:	XIE	PART NO: 产品编号: HDGC2003HMB-XP			
X.XX	±0.30	X.XX°	±2°	CHECK: 校对:	WANG	DATE	SCALE	UNIT	CODE NUMBER
X.XXX	±0.10	X.XXX°	±1°	DRAW: 绘图:	WANG	2012-12-10	2.5:1	mm	A008