
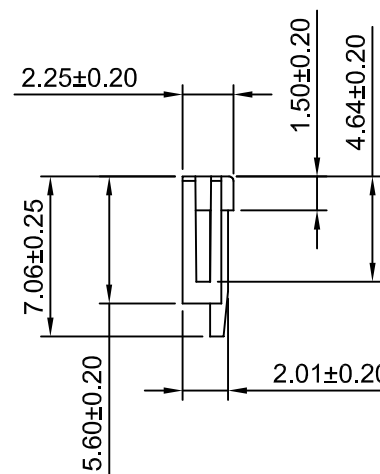
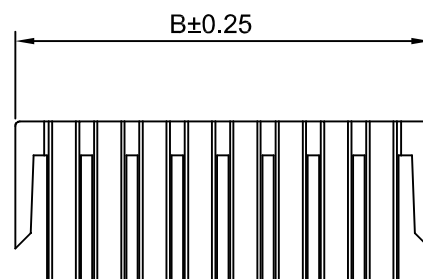



修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE
A0		NEW RELEASE	WANG	2012-12-10

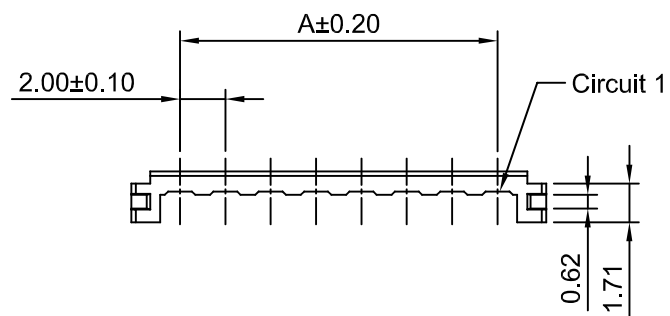

Ordering Information & Dimensions

Circuits	Dimensions(mm)	
	A	B
2P	2.00	6.30
3P	4.00	8.30
4P	6.00	10.30
5P	8.00	12.30
6P	10.00	14.30
8P	14.00	18.30
10P	18.00	22.30
12P	22.00	26.30
14P	26.00	30.30
15P	28.00	32.30

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 100V AC,DC

Temperature Range: -25°C~+85°C

Contact Resistance: 15mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 800V AC/minute

Material: Nylon66, UL94V-0 (Ivory)



深圳市华德共创科技有限公司

Shenzhen Huade co-create Technology Co.,LTD

TEL : 0755-27129737

FAX : 0755-29940187

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表				TITLE: 产品名称: 2.00mm Pitch Seal	
X.X	±0.30	X.X°	±3°	APPD: 核准:	XIE
X.XX	±0.30	X.XX°	±2°	CHECK: 校对:	WANG
X.XXX	±0.10	X.XXX°	±1°	DRAW: 绘图:	WANG
				PART NO: 产品编号:	HDGC2003SB-XP
				DATE	SCALE
				UNIT	CODE NUMBER
				2012-12-10	3:1 mm A008