

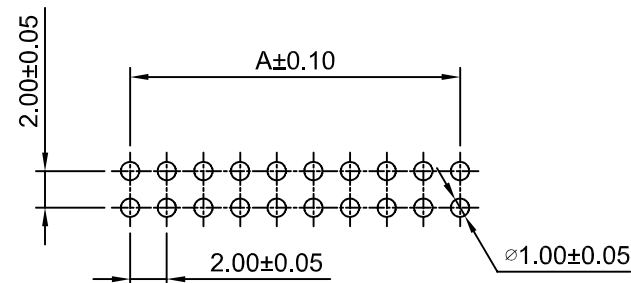
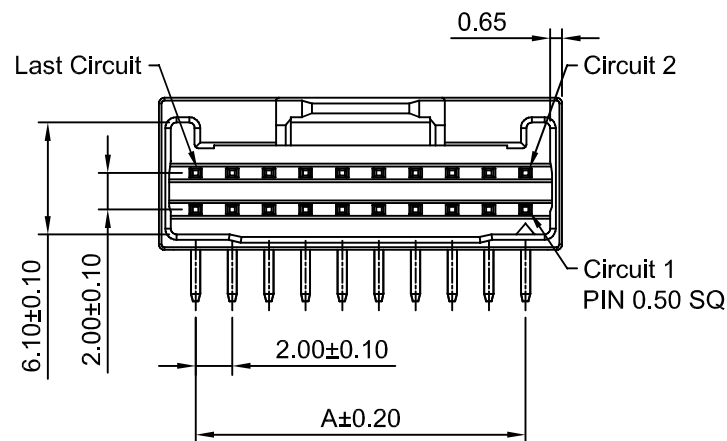
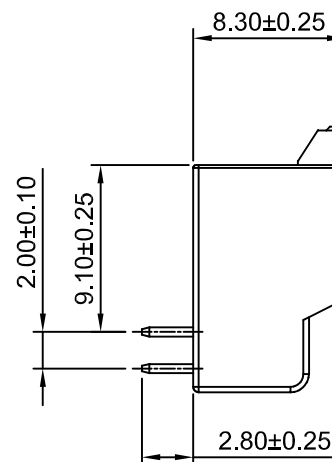


修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE
A0		NEW RELEASE	WANG	2012-03-10

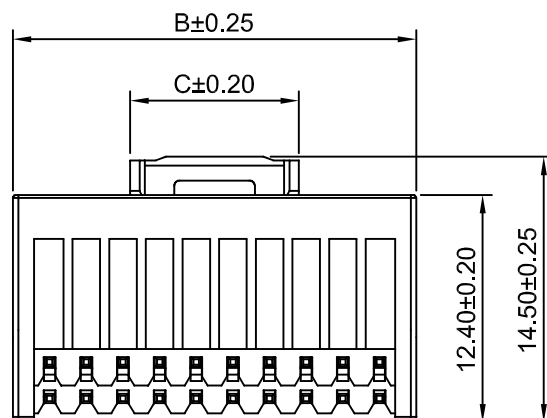

P.C.B LAYOUT



Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2x5P	8.00	12.00	7.30	2x13P	24.00	28.00	9.20
2x6P	10.00	14.00	9.20	2x14P	26.00	30.00	9.20
2x7P	12.00	16.00	9.20	2x15P	28.00	32.00	9.20
2x8P	14.00	18.00	9.20	2x16P	30.00	34.00	9.20
2x9P	16.00	20.00	9.20	2x17P	32.00	36.00	9.20
2x10P	18.00	22.00	9.20	2x18P	34.00	38.00	9.20
2x11P	20.00	24.00	9.20	2x19P	36.00	40.00	9.20
2x12P	22.00	26.00	9.20	2x20P	38.00	42.00	9.20

SPECIFICATIONS:

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 10mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage: 800V AC/minute
Pin Material: Brass/Tin over Nickel
Material: Nylon 66,UL94V-0(Beige)

				深圳市华德共创科技有限公司 Shenzhen Huade co-create Technology Co.,LTD TEL : 0755-27129737 FAX : 0755-29940187			
-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表					TITLE: 2.00mm Pitch 产品名称: 90° Wafer		
X.X	±0.30	X.X°	±3°	APPD: 核准: XIE	PART NO: HDGC2006WRD-2xXP 产品编号:		
X.XX	±0.30	X.XX°	±2°	CHECK: 校对: WANG	DATE	SCALE	UNIT
X.XXX	±0.10	X.XXX°	±1°	DRAW: 绘图: WANG	2012-03-10	2.5:1	mm
							CODE NUMBER
							A008