






修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE
A0		NEW RELEASE	WANG	2014-06-18




2P

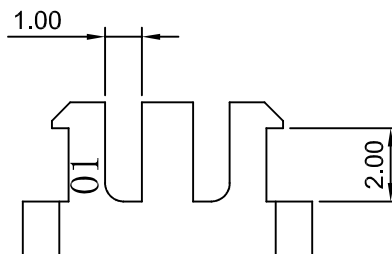

3P

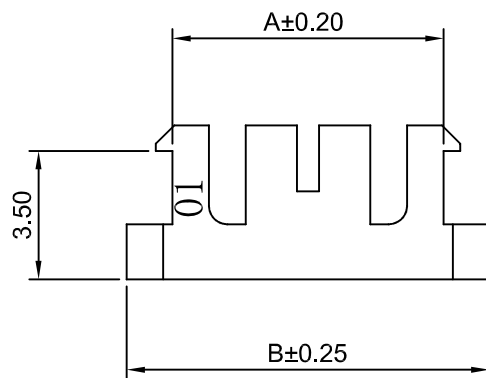

4P~16P

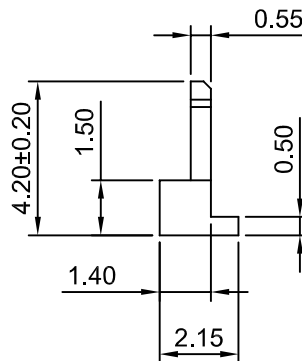

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	3.40	5.90	10P	19.40	21.90
3P	5.40	7.90	11P	21.40	23.90
4P	7.40	9.90	12P	23.40	25.90
5P	9.40	11.90	13P	25.40	27.90
6P	11.40	13.90	14P	27.40	29.90
7P	13.40	15.90	15P	29.40	31.90
8P	15.40	17.90	16P	31.40	33.90
9P	17.40	19.90			

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range:-25°C ~ +85°C

Contact Resistance: 30mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 1000V AC/minute

Material: Nylon 66, UL94V-0(Brick red)



深圳市华德共创科技有限公司

Shenzhen Huade co-create Technology Co.,LTD

TEL : 0755-27129737 FAX : 0755-29940187

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表					TITLE: 产品名称：2.00mm Pitch Seal			
X.X	±0.30	X.X°	±3°	APPD: 核准：XIE	PART NO: 产品编号：HDGC2008S-XP			
X.XX	±0.30	X.XX°	±2°	CHECK: 校对：WANG	DATE	SCALE	UNIT	CODE NUMBER
X.XXX	±0.10	X.XXX°	±1°	DRAW: 绘图：WANG	2014-06-18	5:1	mm	A008