




| 修订 REV | 标记 MARK | 修改摘要 REVISION DESCRIPTION | 签名 SIGNA TURE | 日期 DATE |
|---|---|---|---|---|
| A0 | | NEW RELEEASE | WANG | 2018-12-10 |
| | | | | |

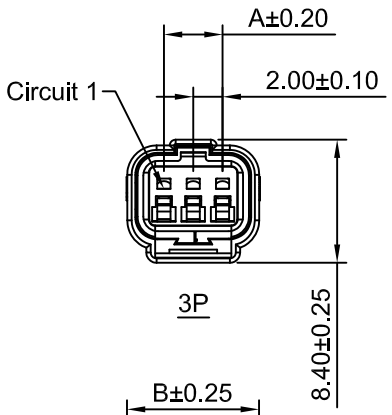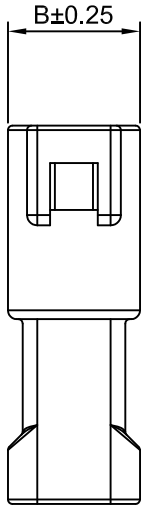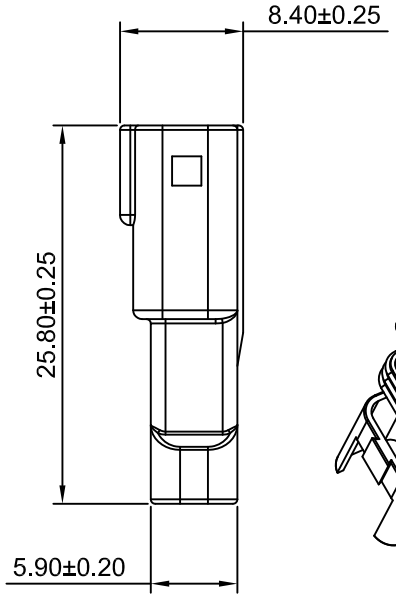


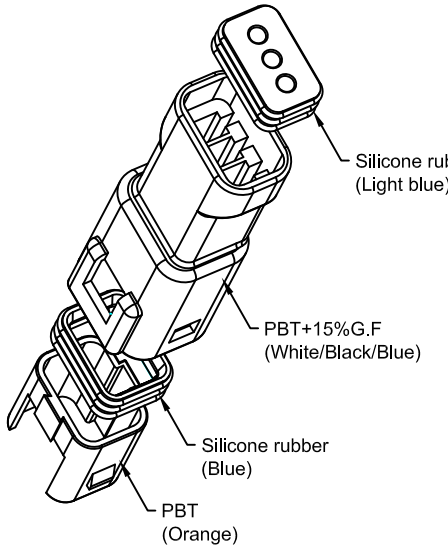




Ordering Information:

HDGC2009HMA-XP - *** (1 - 2)

1.Part No.
2.Color:
(blank):White
BK:Black
BL:Blue

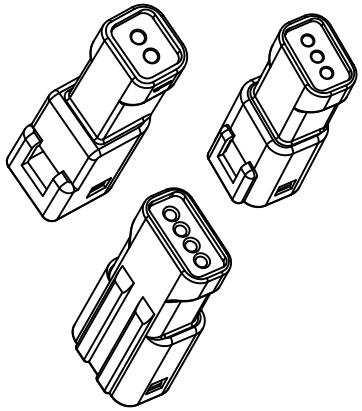

## SPECIFICATIONS:

Current Rating: 2A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 30mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage: 800V AC/minute
Material: PBT+15%G.F,UL94V-0(White)

Ordering Information & Dimensions

| Circuits | Dimensions(mm) | | Circuits | Dimensions(mm) | |
|---|---|---|---|---|---|
| | A | B | | A | B |
| 2P | 2.00 | 7.00 | 4P | 6.00 | 11.00 |
| 3P | 4.00 | 9.00 | | | |

深圳市华德共创科技有限公司
Shenzhen Huade co-create Technology Co.,LTD
TEL：0755-27129737 FAX：0755-29940187

| -TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表 | | | | | | TITLE: 产品名称： | 2.00mm Pitch Housing | | |
|---|---|---|---|---|---|---|---|---|---|
| X.X | ±0.30 | X.X° | ±3° | APPD: 核准： | XIE | PART NO: 产品编号： | HDGC2009HMA-XP | | |
| X.XX | ±0.30 | X.XX° | ±2° | CHECK: 校对： | WANG | DATE | SCALE | UNIT | CODE NUMBER |
| X.XXX | ±0.10 | X.XXX° | ±1° | DRAW: 绘图： | WANG | 2018-12-10 | 2:1 | mm | A008 |