


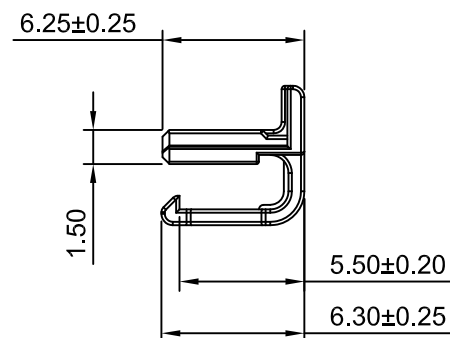
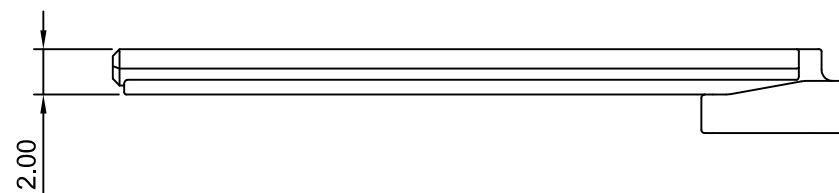



修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE
A0		NEW RELEASE	WANG	2020-09-18

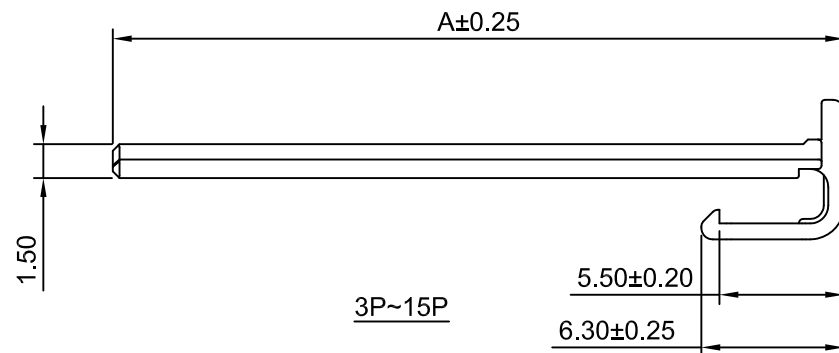

Ordering Information & Dimensions

Circuits	Dimensions(mm)
	A
2P	6.25
3P	8.25
4P	10.25
5P	12.25
6P	14.25
7P	16.25
8P	18.25
9P	20.25
10P	22.25
11P	24.25
12P	26.25
13P	28.25
14P	30.25
15P	32.25

SPECIFICATIONS:

Current Rating: 6A AC,DC (MAX)
Voltage Rating: 125V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 10mΩ Max.
Insulation Resistance: 100MΩ Min.
Withstanding Voltage: 500V AC/minute
Material: PBT+30%G.F,UL94V-0

深圳市华德共创科技有限公司
Shenzhen Huade co-create Technology Co.,LTD
TEL : 0755-27129737 FAX : 0755-29940187

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表						TITLE: 产品名称 :2.00mm Pitch locking plate			
X.X	±0.30	X.X°	±3°	APPD: 核准:	XIE	PART NO: 产品编号: HDGC2010DS-XP			
X.XX	±0.30	X.XX°	±2°	CHECK: 校对:	WANG	DATE	SCALE	UNIT	CODE NUMBER
X.XXX	±0.10	X.XXX°	±1°	DRAW: 绘图:	WANG	2020-09-18	3:1	mm	A008