

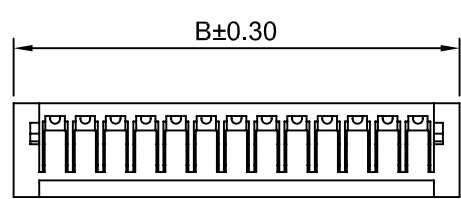
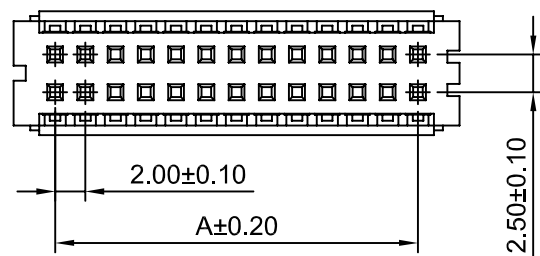
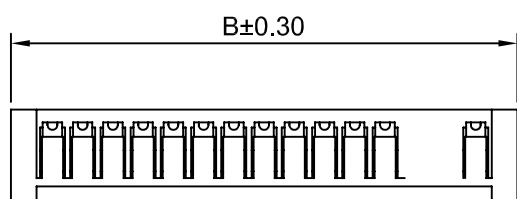
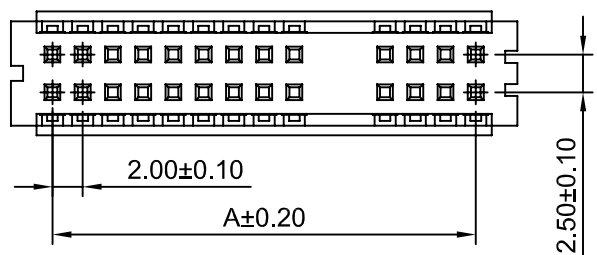



修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE
A0		NEW RELEASE	WANG	2020-10-20

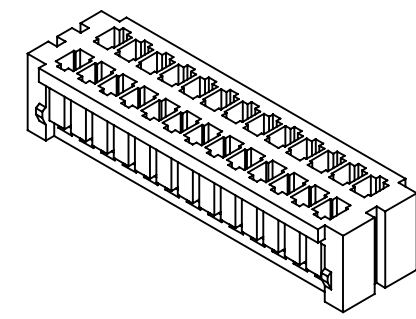

2x5P~2x14P

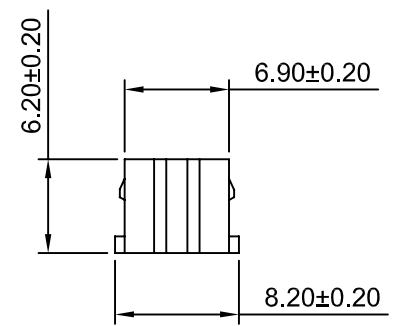

2x15P~2x30P

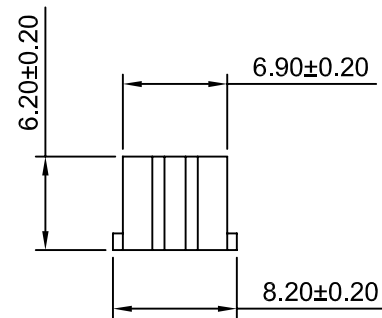

SPECIFICATIONS:
 Current Rating: 3A AC,DC
 Voltage Rating: 125V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 1500V AC/minute
 Material: Nylon 66,UL94V-0,(Gray)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2x5P	8.00	13.50	2x13P	24.00	29.50
2x6P	10.00	15.50	2x14P	26.00	31.50
2x7P	12.00	17.50	2x15P	28.00	33.50
2x8P	14.00	19.50	2x16P	30.00	35.50
2x9P	16.00	21.50	2x17P	32.00	37.50
2x10P	18.00	23.50	2x20P	38.00	43.50
2x11P	20.00	25.50	2x25P	48.00	53.50
2x12P	22.00	27.50	2x30P	58.00	63.50



深圳市华德共创科技有限公司

Shenzhen Huade co-create Technology Co.,LTD

TEL : 0755-27129737 FAX : 0755-29940187

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表					TITLE: 产品名称: 2.00mm Pitch Housing				
X.X	±0.30	X.X°	±3°	APPD: 核准:	XIE	PART NO: 产品编号: HDGC2010HA-2xXP			
X.XX	±0.30	X.XX°	±2°	CHECK: 校对:	WANG	DATE	SCALE	UNIT	CODE NUMBER
X.XXX	±0.10	X.XXX°	±1°	DRAW: 绘图:	WANG	2020-10-20	2:1	mm	A008