




修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE
A0		NEW RELEASE	WANG	2018-12-18

Ordering Information:
 HDGC2010WRC-S-XP - *** - ***
 1 2 3


- 1.Part NO.
 2.Color:
 (blank): Natural(Beige)
 BK: Black
 RD: Red
 BL: Blue
 3.Pin Finish:
 (blank): Tin over Nickel
 G: Gold over Nickel




2P



3P




4P






5P

Ordering Information & Dimensions


Circuits	Dimensions(mm)		
	A	B	C
2P	2.00	8.00	4.80
3P	4.00	10.00	6.80
4P	6.00	12.00	8.80
5P	8.00	14.00	10.80
6P	10.00	16.00	12.80
7P	12.00	18.00	14.80
8P	14.00	20.00	16.80
9P	16.00	22.00	18.80
10P	18.00	24.00	20.80
11P	20.00	26.00	22.80
12P	22.00	28.00	24.80
13P	24.00	30.00	26.80
14P	26.00	32.00	28.80
15P	28.00	34.00	30.80

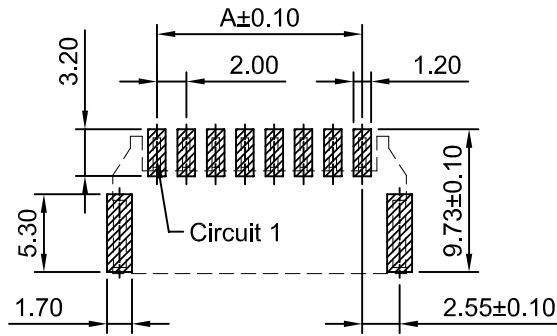

P.C.B LAYOUT
 TOLERANCE:±0.05

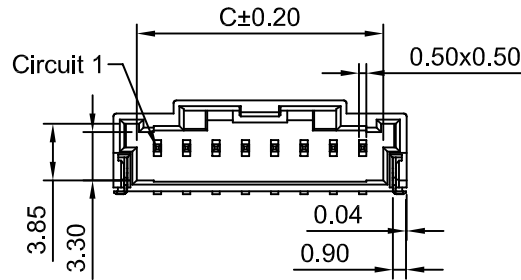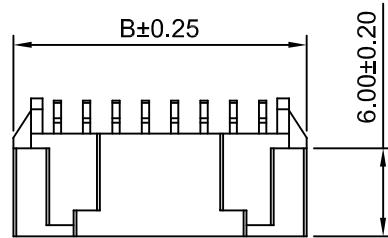


6P~15P

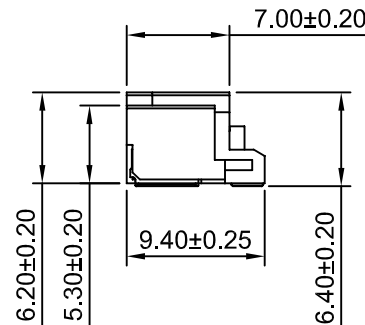

SPECIFICATIONS:

Current Rating: 3A AC,DC
 Voltage Rating: 125V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 10mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage: 500V AC/minute
 Pin Material: Phorphos Bronze
 Solder tabs: Phorphos Bronze/Matte Tin over Nickel
 Housing Material: Nylon 9T,UL94V-0

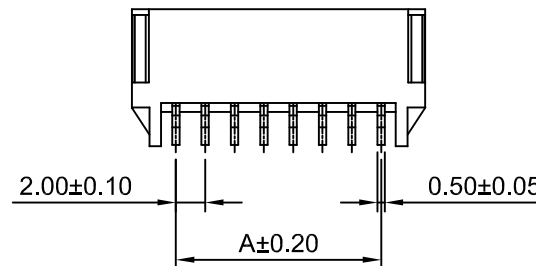

深圳市华德共创科技有限公司

Shenzhen Huade co-create Technology Co.,LTD

TEL : 0755-27129737 FAX : 0755-29940187

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表						TITLE: 产品名称: 2.00mm Pitch 90° Wafer	
X.X	±0.30	X.X°	±3°	APPD: 核准:	XIE	PART NO: 产品编号: HDGC2010WRC-S-XP	
X.XX	±0.30	X.XX°	±2°	CHECK: 校对:	WANG	DATE	SCALE
X.XXX	±0.10	X.XXX°	±1°	DRAW: 绘图:	WANG	2018-12-18	2:1
						UNIT	CODE NUMBER
						mm	A008