

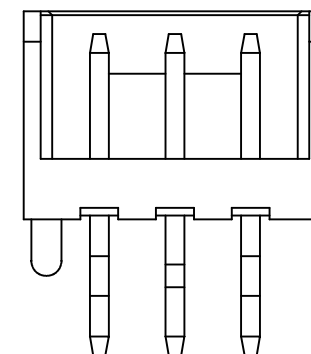
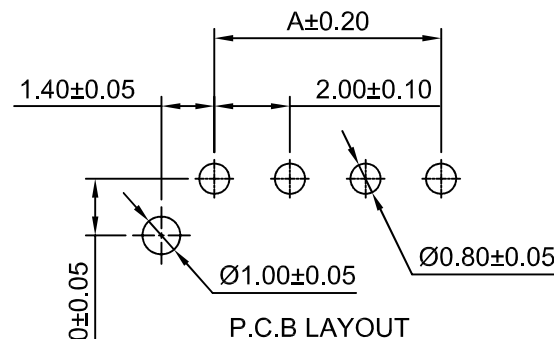




修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE
A0		NEW RELEASE	WANG	2017-10-14

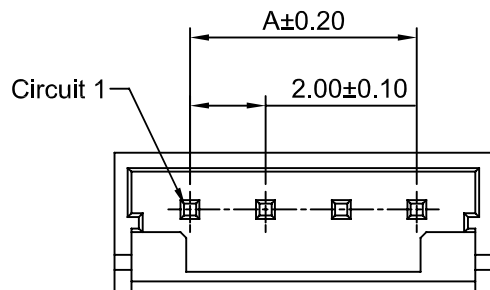

3P

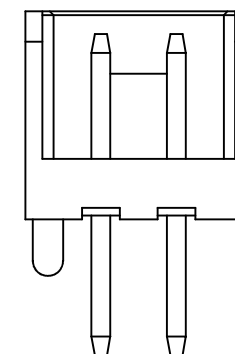

2P

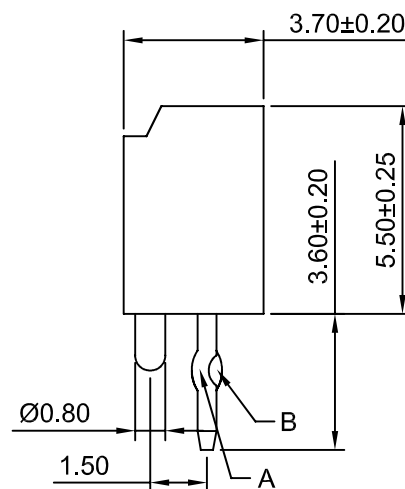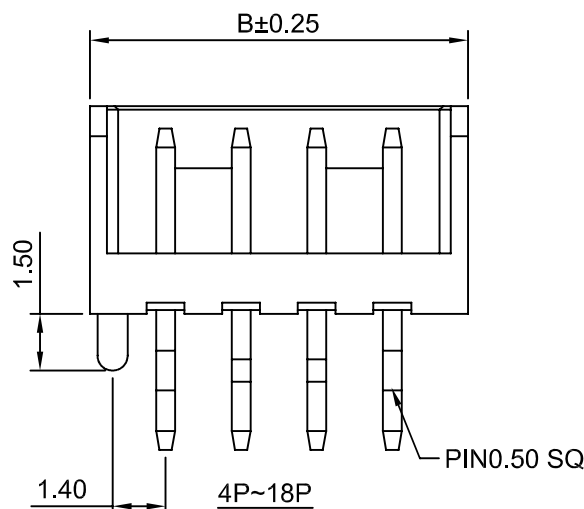

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	2.00	6.00	11P	20.00	24.00
3P	4.00	8.00	12P	22.00	26.00
4P	6.00	10.00	13P	24.00	28.00
5P	8.00	12.00	14P	26.00	30.00
6P	10.00	14.00	15P	28.00	32.00
7P	12.00	16.00	16P	30.00	34.00
8P	14.00	18.00	17P	32.00	36.00
9P	16.00	20.00	18P	34.00	38.00
10P	18.00	22.00			

King To Be Applied As Follows

Circuits NO.	1	2	3	4	5	N-2	N-1	N
3P	A	B	A					
4P	A	B	B	A				
5P	A	B	-	B	A			
6P~18P	-	A	B	-	-	B	A	-

SPECIFICATIONS:

Current Rating: 2A AC,DC
Voltage Rating: 100V AC,DC
Temperature Range:-25°C ~ +85°C
Contact Resistance: 10mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage: 800V AC/minute
Pin Material: Brass/Tin over Nickel
Material: Nylon 66,UL94V-0(White)

HDGC 深圳市华德共创科技有限公司
Shenzhen Huade co-create Technology Co.,LTD
TEL : 0755-27129737 FAX : 0755-29940187

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表			TITLE: 产品名称: 2.00mm Pitch 180° Wafer	
X.X	±0.30	X.X°	±3°	APPD: 核准: XIE
X.XX	±0.30	X.XX°	±2°	CHECK: 校对: WANG
X.XXX	±0.10	X.XXX°	±1°	DRAW: 绘图: WANG
PART NO: 产品编号: HDGC2010WV-F-XP			DATE	SCALE
2017-10-14			5:1	UNIT
A008			mm	CODE NUMBER