
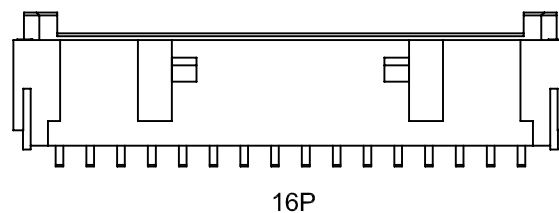
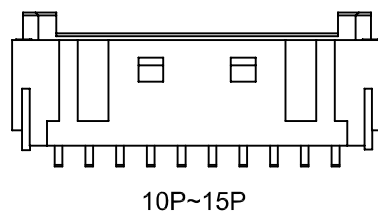



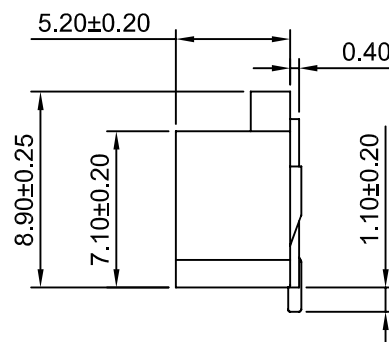
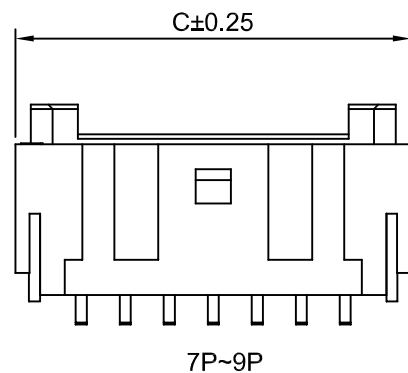
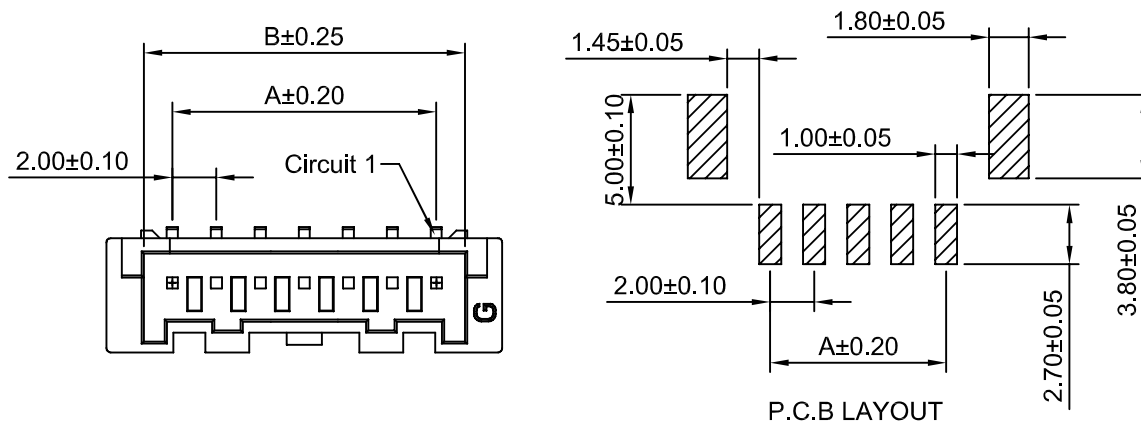


修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE
A0		NEW RELEASE	WANG	2014-06-30



SPECIFICATIONS:

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 10mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage: 800V AC/minute
Pin Material: Brass/Tin over Nickel
Material: Nylon 6T, UL94V-0(Ivory)

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2P	2.00	4.60	8.00	10P	18.00	20.60	24.00
3P	4.00	6.60	10.00	11P	20.00	22.60	26.00
4P	6.00	8.60	12.00	12P	22.00	24.60	28.00
5P	8.00	10.60	14.00	13P	24.00	26.60	30.00
6P	10.00	12.60	16.00	14P	26.00	28.60	32.00
7P	12.00	14.60	18.00	15P	28.00	30.60	34.00
8P	14.00	16.60	20.00	16P	30.00	32.60	36.00
9P	16.00	18.60	22.00				



深圳市华德共创科技有限公司

Shenzhen Huade co-create Technology Co.,LTD

TEL : 0755-27129737

FAX : 0755-29940187

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表						TITLE: 2.00mm Pitch 产品名称: 90° Wafer			
X.X	±0.30	X.X°	±3°	APPD: 核准:	XIE	PART NO: HDGC2012WR-S-XP 产品编号:			
X.XX	±0.30	X.XX°	±2°	CHECK: 校对:	WANG	DATE	SCALE	UNIT	CODE NUMBE
X.XXX	±0.10	X.XXX°	±1°	DRAW: 绘图:	WANG	2014-06-30	3:1	mm	A008