
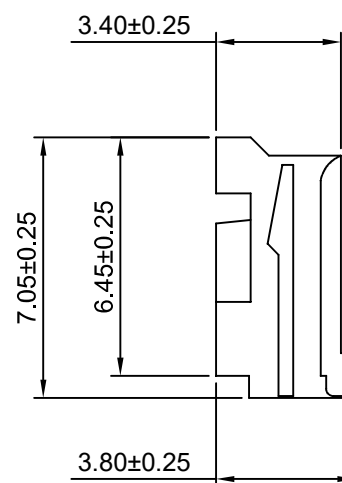
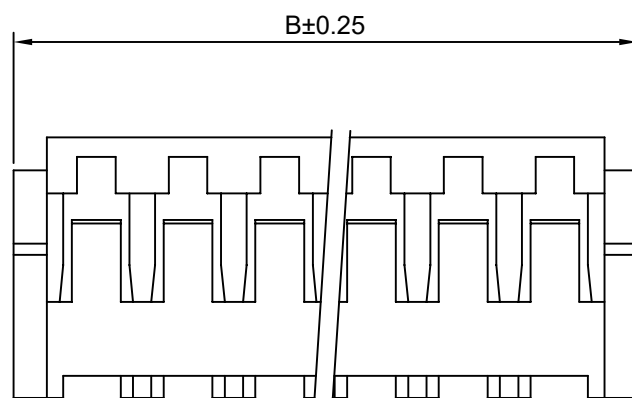
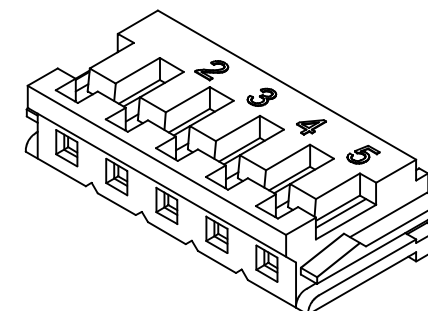


修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE
A0		NEW RELEASE	WANG	2016-05-10

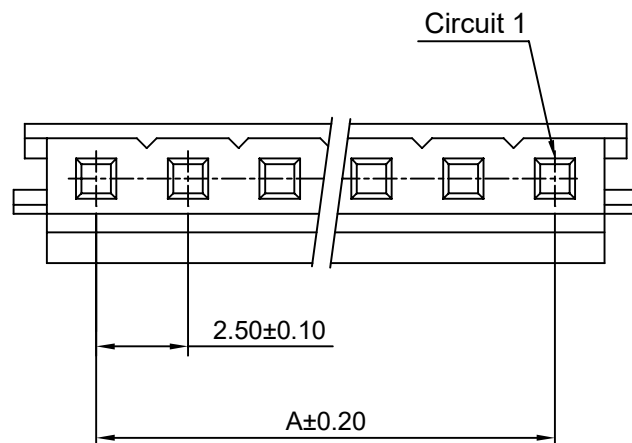

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	2.50	7.00	9P	20.00	24.50
3P	5.00	9.50	10P	22.50	27.00
4P	7.50	12.00	11P	25.00	29.50
5P	10.00	14.50	12P	27.50	32.00
6P	12.50	17.00	13P	30.00	34.50
7P	15.00	19.50	14P	32.50	37.00
8P	17.50	22.00	15P	35.00	39.50

SPECIFICATIONS:

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 800V AC/minute
Material: Nylon 66,UL94V-0(White)

HDGC		深圳市华德共创科技有限公司			
		Shenzhen Huade co-create Technology Co.,LTD			
		TEL : 0755-27129737 FAX : 0755-29940187			
-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表				TITLE: 产品名称: 2.50mm Pitch Housing	
X.X	±0.30	X.X°	±3°	APPD: 核准:	XIE
X.XX	±0.30	X.XX°	±2°	CHECK: 校对:	WANG
X.XXX	±0.10	X.XXX°	±1°	DRAW: 绘图:	WANG
		PART NO: 产品编号:		HDGC2502H-XP	
		DATE	SCALE	UNIT	CODE NUMBER
		2016-05-10	5:1	mm	A008