



| 修订<br>REV | 标记<br>MARK | 修改摘要<br>REVISION DESCRIPTION | 签名<br>SIGNATURE | 日期<br>DATE |
|-----------|------------|------------------------------|-----------------|------------|
| A0        |            | NEW RELEASE                  | WANG            | 2016-05-10 |
|           |            |                              |                 |            |

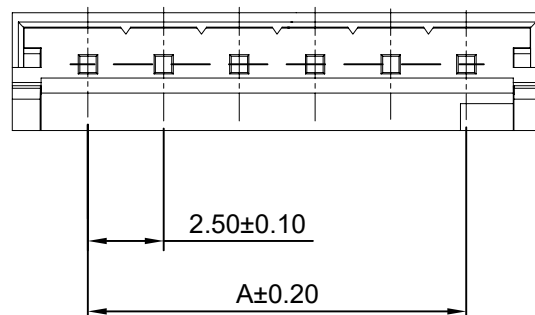



P.C.B LAYOUT

# SPECIFICATIONS:

Current Rating: 3A AC,DC  
Voltage Rating: 250V AC,DC  
Temperature Range: -25°C ~ +85°C  
Contact Resistance: 10mΩ Max  
Insulation Resistance: 1000MΩ Min  
Withstanding Voltage: 800V AC/minute  
Pin Material: Brass/Tin-plated  
Material: Nylon 66,UL94V-0(White)  
Soldering Temperature: 260°C±5°C  
Immersion Period: 5 seconds

## Ordering Information & Dimensions

| Circuits | Dimensions(mm) |       | Circuits | Dimensions(mm) |       |
|----------|----------------|-------|----------|----------------|-------|
|          | A              | B     |          | A              | B     |
| 2P       | 2.50           | 7.50  | 9P       | 20.00          | 25.00 |
| 3P       | 5.00           | 10.00 | 10P      | 22.50          | 27.50 |
| 4P       | 7.50           | 12.50 | 11P      | 25.00          | 30.00 |
| 5P       | 10.00          | 15.00 | 12P      | 27.50          | 32.50 |
| 6P       | 12.50          | 17.50 | 13P      | 30.00          | 35.00 |
| 7P       | 15.00          | 20.00 | 14P      | 32.50          | 37.50 |
| 8P       | 17.50          | 22.50 | 15P      | 35.00          | 40.00 |

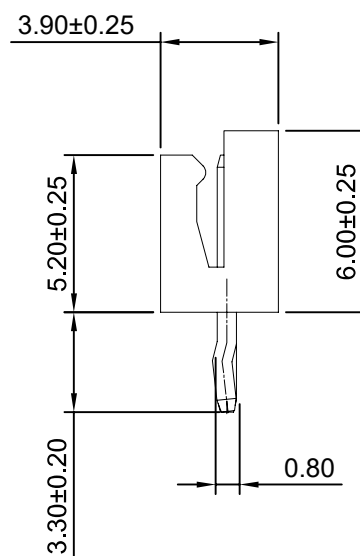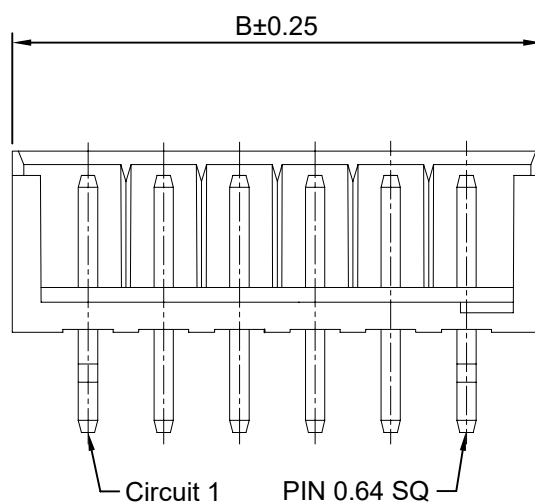




深圳市华德共创科技有限公司

Shenzhen Huade co-create Technology Co.,LTD

TEL : 0755-27129737 FAX : 0755-29940187

|                                                     |       |        |                                                                                                                                                    |                    |                                                            |       |      |
|-----------------------------------------------------|-------|--------|----------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|------------------------------------------------------------|-------|------|
| -TOLERANCES-<br>UNLESS OTHERWISE SPECIFIED<br>公差参数表 |       |        |  <div> <div>TITLE:</div> <div>产品名称: 2.50mm Pitch</div> </div> |                    | <div> <div>TITLE:</div> <div>产品名称: 180° Wafer</div> </div> |       |      |
| X.X                                                 | ±0.30 | X.X°   | ±3°                                                                                                                                                | APPD:<br>核准: XIE   | PART NO:<br>产品编号: HDGC2502WV-XP                            |       |      |
| X.XX                                                | ±0.30 | X.XX°  | ±2°                                                                                                                                                | CHECK:<br>校对: WANG | DATE                                                       | SCALE | UNIT |
| X.XXX                                               | ±0.10 | X.XXX° | ±1°                                                                                                                                                | DRAW:<br>绘图: WANG  | 2016-05-10                                                 | 4:1   | mm   |
|                                                     |       |        |                                                                                                                                                    |                    |                                                            |       | A008 |