

修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE
A0		NEW RELEASE	WANG	2017-10-25

Ordering Information:

HDGC2509HA-XP - *** - **
1 2 3

1.Part No.

2.Material:

(blank):Nylon 66,UL94V-0

GWT:Nylon 66,UL94V-0,GWT 750℃


3.Color:

(Blank):Natural

RD:Red

YL:Yellow

BL:Blue

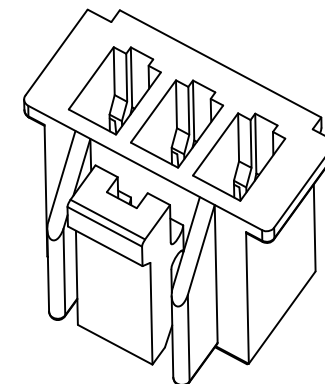

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -25℃ ~ +85℃

Contact Resistance: 20mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage:1000VAC/minute

Material: Nylon 66,UL94V-0(Natural)

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2P	2.50	7.50	5.60	9P	20.00	25.00	23.10
3P	5.00	10.00	8.10	10P	22.50	27.50	25.60
4P	7.50	12.50	10.60	11P	25.00	30.00	28.10
5P	10.00	15.00	13.10	12P	27.50	32.50	30.60
6P	12.50	17.50	15.60	13P	30.00	35.00	33.10
7P	15.00	20.00	18.10	14P	32.50	37.50	35.60
8P	17.50	22.50	20.60	15P	35.00	40.00	38.10



深圳市华德共创科技有限公司

Shenzhen Huade co-create Technology Co.,LTD

TEL : 0755-27129737

FAX : 0755-29940187

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表				TITLE: 产品名称: 2.50mm Pitch Housing	
X.X	±0.30	X.X°	±3°	APPD: 核准:	XIE
X.XX	±0.30	X.XX°	±2°	CHECK: 校对:	WANG
X.XXX	±0.10	X.XXX°	±1°	DRAW: 绘图:	WANG
				PART NO: 产品编号:	HDGC2509HA-XP
				DATE	SCALE
				UNIT	CODE NUMBER
				2017-10-25	4:1 mm A008