

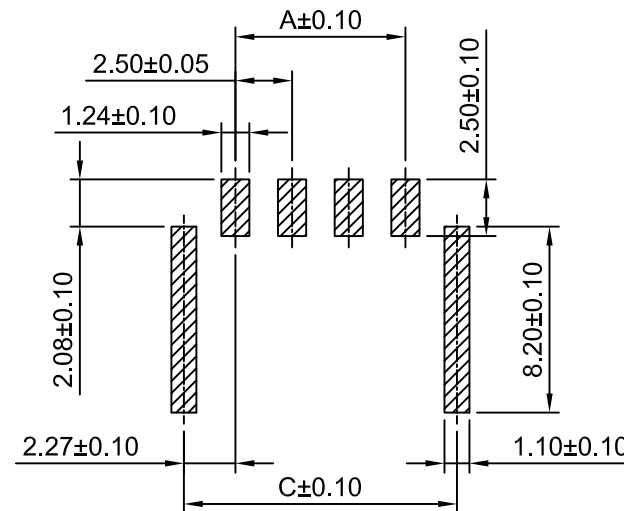
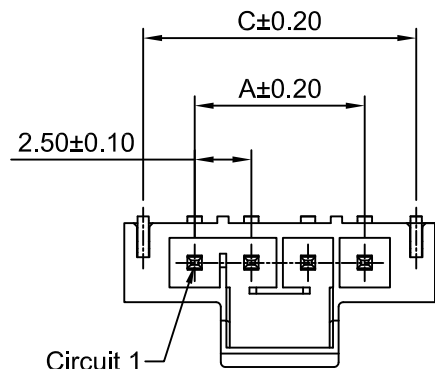


修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE
A0		NEW RELEASE	WANG	2018-08-22


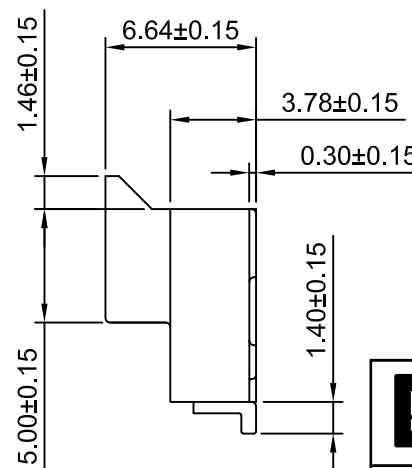


P.C.B LAYOUT

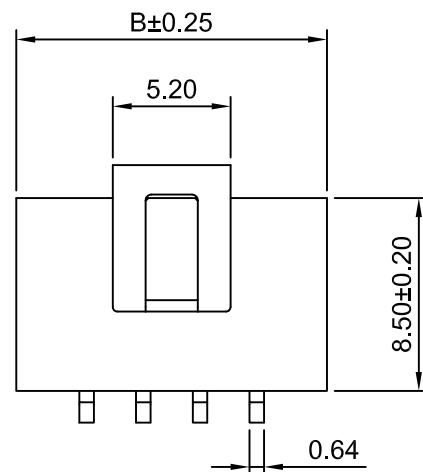

Ordering Information:
HDGC2509WRA-S-XP - ***
1 2

- Part No.
- Color.
(Blank):Black,KAY A
NAT:Natural,KAY B

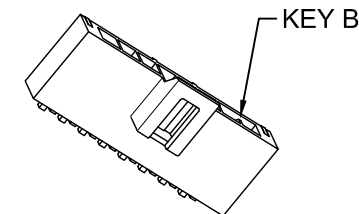

SPECIFICATIONS:

Current Rating: 6.5A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage:1500VAC/minute
Pin Material: Brass/Tin over Nickel
Material: LCP,UL94V-0(Black)

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2P	2.50	8.74	7.04	6P	12.50	18.74	17.04
3P	5.00	11.24	9.54	7P	15.00	21.24	19.54
4P	7.50	13.74	12.04	8P	17.50	23.74	22.04
5P	10.00	16.24	14.54				



深圳市华德共创科技有限公司


Shenzhen Huade co-create Technology Co.,LTD

TEL : 0755-27129737


FAX : 0755-29940187

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表						TITLE: 2.50mm Pitch 产品名称: 90 ° Wafer			
X.X	±0.30	X.X°	±3°	APPD: 核准:	XIE	PART NO: 产品编号:		HDGC2509WRA-S-XP	
X.XX	±0.30	X.XX°	±2°	CHECK: 校对:	WANG	DATE	SCALE	UNIT	CODE NUMBER
X.XXX	±0.10	X.XXX°	±1°	DRAW: 绘图:	WANG	2018-08-22	3:1	mm	A008


修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE
A0		NEW RELEASE	WANG	2018-08-22




2x2P
KEY A




2x3P
KEY A

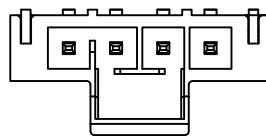


2x4P
KEY A

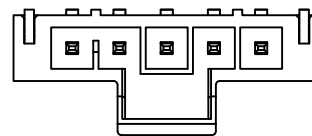


2x5P
KEY A




2x2P
KEY B




2x3P
KEY B

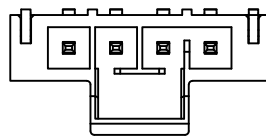


2x4P
KEY B

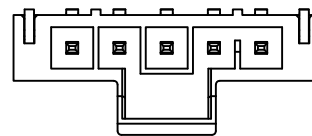


2x5P
KEY B

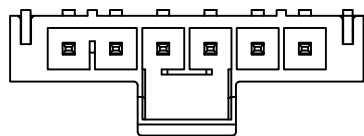


2x6P
KEY A

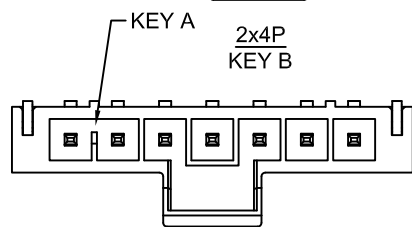


2x7P
KEY A

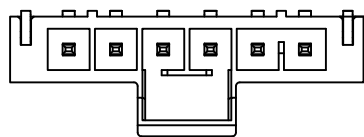


2x6P
KEY B

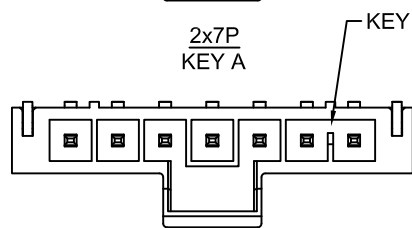

2x7P
KEY B

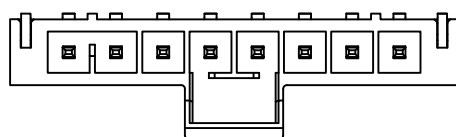

2x8P
KEY A

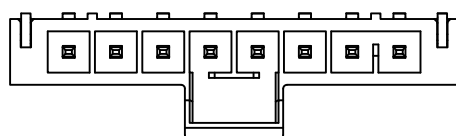

2x8P
KEY B

Ordering Information:

HDGC2509WRA-S-XP - ***


1.Part No.

2.Color.


(Blank):Black,KAY A

NAT:Natural,KAY B

KEY A



KEY B



SPECIFICATIONS:

Current Rating: 6.5A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -25°C ~ +85°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage:1500VAC/minute

Pin Material: Brass/Tin over Nickel

Material: LCP,UL94V-0(Black)

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2P	2.50	8.74	7.04	6P	12.50	18.74	17.04
3P	5.00	11.24	9.54	7P	15.00	21.24	19.54
4P	7.50	13.74	12.04	8P	17.50	23.74	22.04
5P	10.00	16.24	14.54				




深圳市华德共创科技有限公司

Shenzhen Huade co-create Technology Co.,LTD

TEL : 0755-27129737

FAX : 0755-29940187

-TOLERANCES-
UNLESS OTHERWISE SPECIFIED
公差参数表



TITLE: 2.50mm Pitch
产品名称: 90° Wafer

X.X ±0.30 X.X° ±3°

APPD: 核准: XIE

PART NO: HDGC2509WRA-S-XP
产品编号:

X.XX ±0.30 X.XX° ±2°

CHECK: 校对: WANG

DATE SCALE UNIT CODE NUMBER

X.XXX ±0.10 X.XXX° ±1°

DRAW: 绘图: WANG

2018-08-22 2.5:1 mm A008