



修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNA TURE	日期 DATE
A0		NEW RELEEASE	WANG	2016-07-10

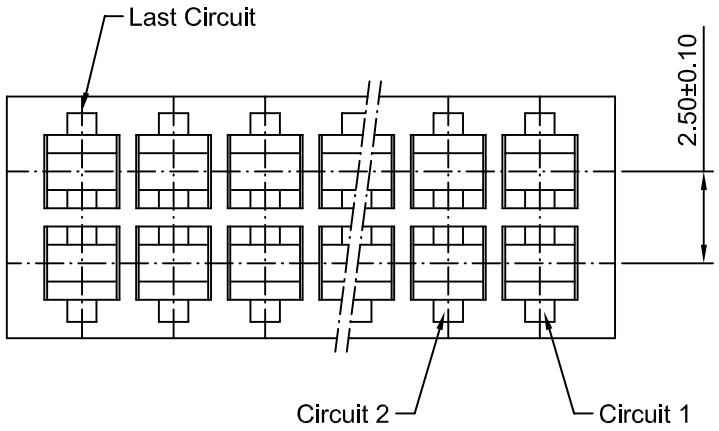

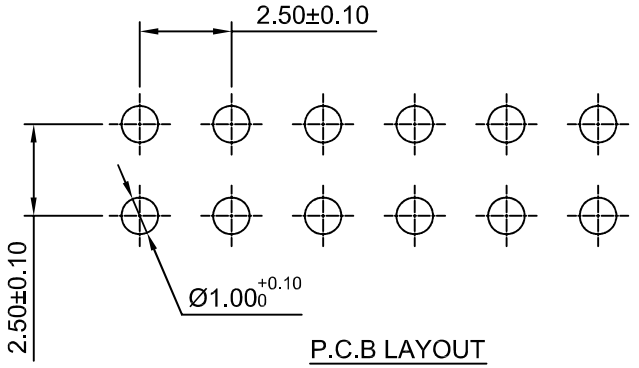

P.C.B LAYOUT

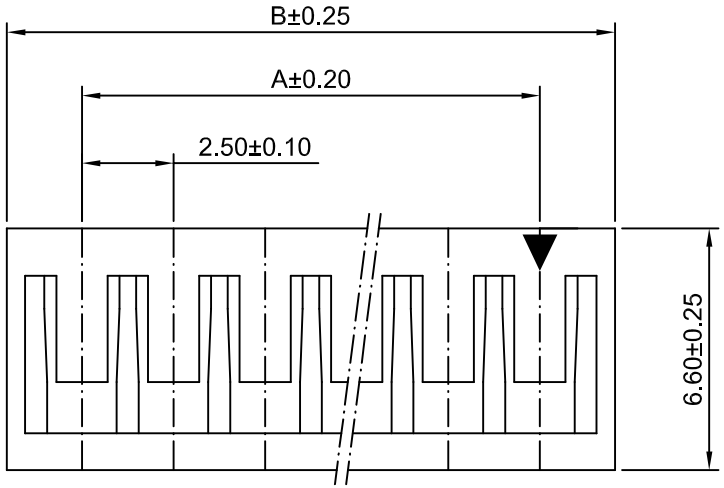

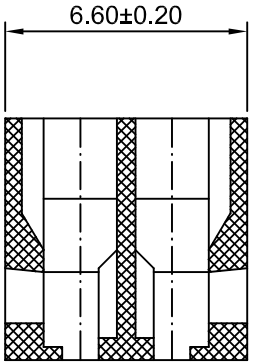

SPECIFICATIONS:

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range:-25°C ~ +85°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1000V AC/minute
Material: Nylon 66,UL94V-0 (White)

Ordering Information & Dimensions

Circuits	Dimensions(mm)	
	A	B
2x2P	2.50	6.70
2x3P	5.00	9.20
2x4P	7.50	11.70
2x5P	10.00	14.20
2x6P	12.50	16.70
2x7P	15.00	19.20
2x8P	17.50	21.70
2x9P	20.00	24.20

Circuits	Dimensions(mm)	
	A	B
2x10P	22.50	26.70
2x11P	25.00	29.20
2x12P	27.50	31.70
2x13P	30.00	34.20
2x14P	32.50	36.70
2x15P	35.00	39.20
2x16P	37.50	41.70

深圳市华德共创科技有限公司
Shenzhen Huade co-create Technology Co.,LTD
TEL：0755-27129737 FAX：0755-29940187

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表						TITLE: 产品名称： 2.50mm Pitch Housing			
X.X	±0.30	X.X°	±3°	APPD: 核准：	XIE	PART NO: 产品编号：	HDGC2514H-2xXP		
X.XX	±0.30	X.XX°	±2°	CHECK: 校对：	WANG	DATE	SCALE	UNIT	CODE NUMBER
X.XXX	±0.10	X.XXX°	±1°	DRAW: 绘图：	WANG	2016-07-10	5:1	mm	A008